

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

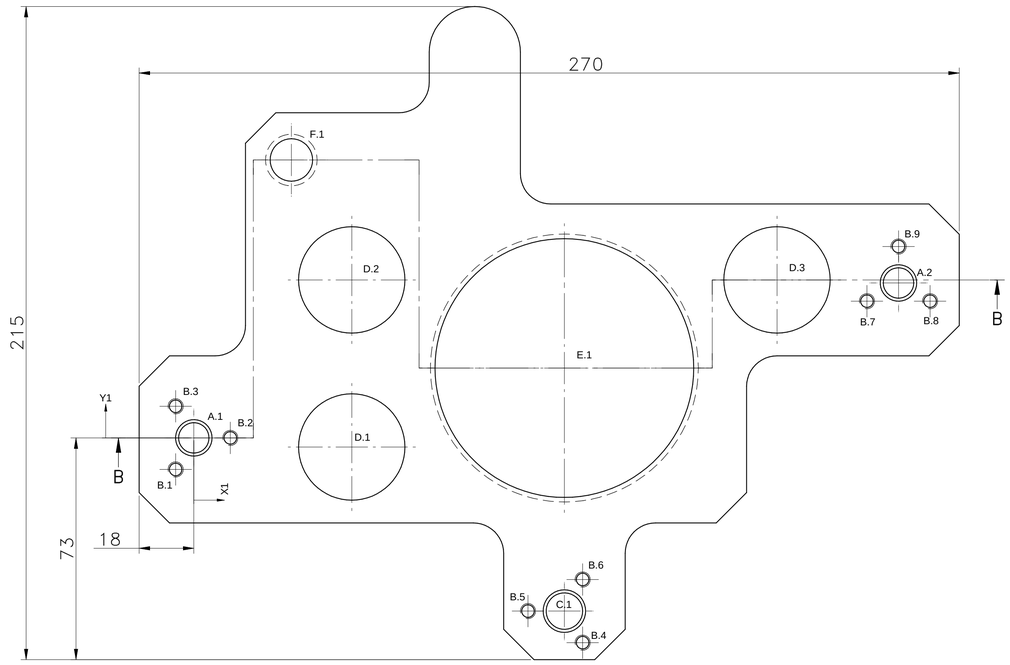

SCALE/ÉCHELLE 1:1

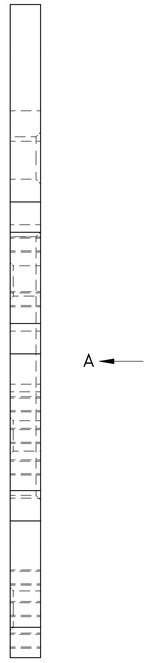


SCALE/ÉCHELLE 1:1


HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 10.00 mm THRU'	REF SECTION A–A
A.2	232.00	51.00	Ø 10.00 mm THRU'	REF SECTION A–A
B.1	−6.00	−10.39	M5 THRU'	
B.2	12.00	0.00	M5 THRU'	
B.3	−6.00	10.39	M5 THRU'	
B.4	128.00	−67.39	M5 THRU'	
B.5	110.00	−57.00	M5 THRU'	
B.6	128.00	−46.61	M5 THRU'	
B.7	221.61	45.00	M5 THRU'	
B.8	242.39	45.00	M5 THRU'	
B.9	232.00	63.00	M5 THRU'	
C.1	122.00	−57.00	Ø 12.00 mm THRU'	H7
D.1	52.00	−3.00	Ø 35.00 mm THRU'	
D.2	52.00	52.00	Ø 35.00 mm THRU'	
D.3	192.00	52.00	Ø 35.00 mm THRU'	
E.1	122.00	23.00	Ø 85.17 mm THRU'	REF SECTION A–A
F.1	32.11	91.47	Ø 13.99 mm THRU'	REF SECTION A–A

TOLERANCE NOTE :– (English)
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN +/– 0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D, SHOULD BE CONTROLLED WITHIN +/– 0.1

NOTE DE TOLERANCE :– (French)
1) TOUT TROU H7 C.D DOIT ÊTRE CONTRÔLÉ SOUS +/– 0.02 / IT7
2) TOUT TROU ET CONTRE–ALÉSAGE C.D, DOIT ÊTRE CONTRÔLÉ SOUS +/– 0.1

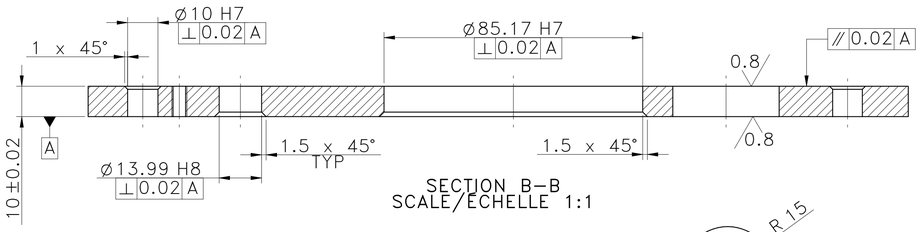


SECTION B–B
SCALE/ÉCHELLE 1:1

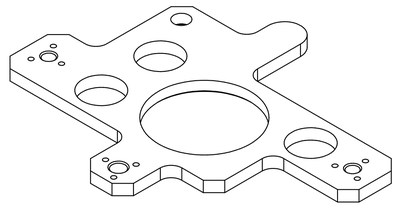

SCALE/ÉCHELLE 1:2

HEAT TREATMENT :–(English)
1) TO BE TOUGHENED UPTO 28–32 HRC.
2) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.(IF APPLICABLE)

TRAITEMENT DE CHALEUR :–(French)
1) A RENFORCER JUSQUDA 28–32 HRC.
2) RE–TARAUDAGE A FAIRE APRES TRAITEMENT DE SURFACE CHEZ LE FOURNISSEUR (SDIL Y A LIEU)

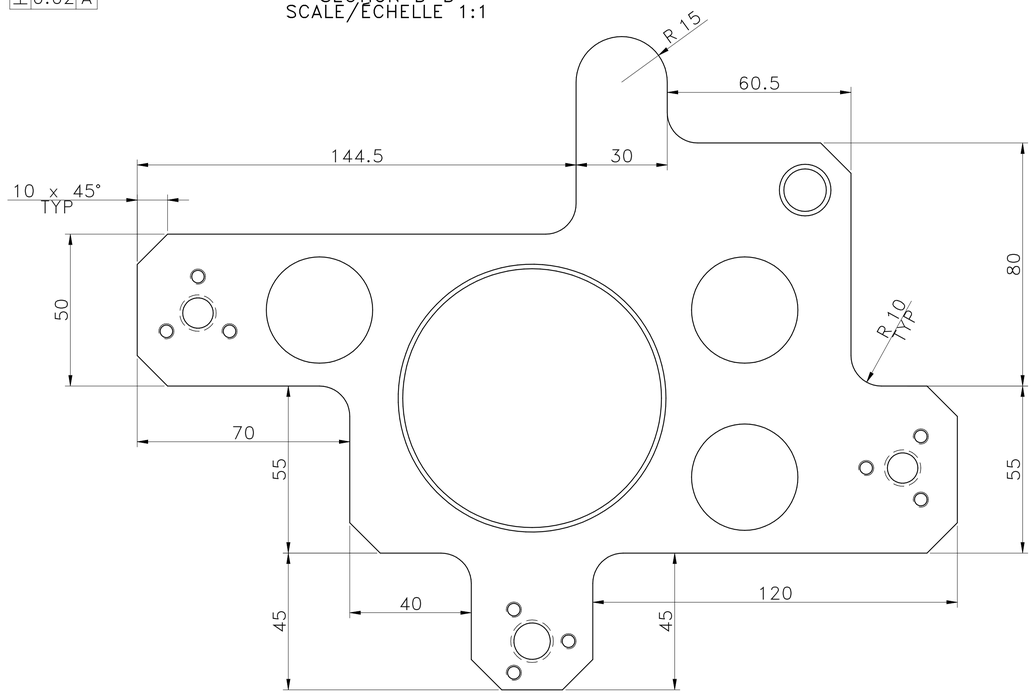

VIEW A
SCALE/ÉCHELLE 1:1

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE : (English)
MATERIAL: C45
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING:
WEIGHT(Kg): 1.47 kg

NOTE :–(French)
MATERIEL : C45
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES :
POIDS (Kg): 1.47 kg

3.2 (0.8)

3.2 (0.8)

RESERVED SPACE FOR CONTRO... PU...

CONTROLLED COPY

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

WIPRO PARI GROUP

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

DESCRIPTION: OP 1050 - ITEM 9
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
84.86 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. ---
PART CLASS. B
HEAT TREATMENT
REF NOTE

LOCATION : PUNE

DRN.BY	CHKD.BY	APPD.BY	MATERIAL
03006751	03004785	03002882	#
21/06/2024	21/06/2024	21/06/2024	NET WEIGHT-Kg 1.47 kg

DRG./PART CODE: P23Y5B099009
REV.: 00
SCALE: 1 : 1
SHEET: 1 OF 1

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01043\Ex0W Uploading\2022--23\P23Y5\P23Y5B099009.dft