

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 6.00 mm THRU'	H7 REF.SEC A–A
A.2	24.50	0.00	Ø 6.00 mm THRU'	H7 REF.SEC A–A
A.3	0.00	186.00	Ø 6.00 mm THRU'	H7 REF.SEC A–A
A.4	24.50	186.00	Ø 6.00 mm THRU'	H7 REF.SEC A–A
B.1	−13.00	153.00	M6 THRU'	
B.2	−4.50	138.00	M6 THRU'	
B.3	−13.00	123.00	M6 THRU'	
B.4	−13.00	93.00	M6 THRU'	
B.5	−13.00	63.00	M6 THRU'	
B.6	−13.00	33.00	M6 THRU'	
B.7	37.00	33.00	M6 THRU'	
B.8	37.00	63.00	M6 THRU'	
B.9	37.00	93.00	M6 THRU'	
B.10	37.00	123.00	M6 THRU'	
B.11	18.00	138.00	M6 THRU'	
B.12	40.50	138.00	M6 THRU'	
B.13	37.00	153.00	M6 THRU'	
C.1	−1.50	107.80	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 10.00 mm DEEP	REF.SEC A–A
C.2	23.50	107.80	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 10.00 mm DEEP	REF.SEC A–A
C.3	48.50	107.80	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 10.00 mm DEEP	REF.SEC A–A
C.4	−1.50	17.80	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 10.00 mm DEEP	REF.SEC A–A
C.5	23.50	17.80	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 10.00 mm DEEP	REF.SEC A–A
C.6	48.50	17.80	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 10.00 mm DEEP	REF.SEC A–A
C.7	−14.00	186.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC F–F
C.8	38.50	186.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC F–F
C.9	−14.00	0.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC F–F
C.10	38.50	0.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF.SEC F–F
D.1	71.65	20.91	Ø 9.00 mm THRU'	REF.SEC A–A
D.2	89.65	20.91	Ø 9.00 mm THRU'	REF.SEC A–A
E.1	80.65	−2.09	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm – 5.80 mm DEEP	REF.SEC E–E
E.2	80.65	−32.09	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm – 5.80 mm DEEP	REF.SEC E–E

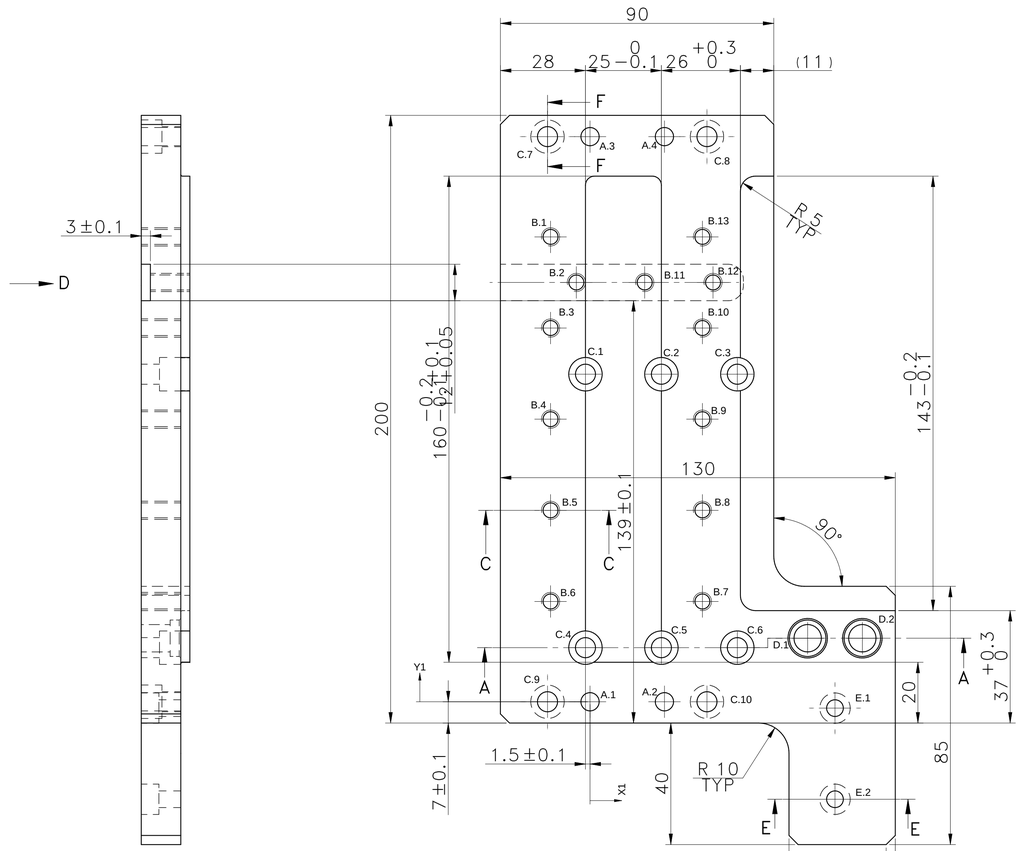


SCALE/ÉCHELLE 1:1


SCALE/ÉCHELLE 1:1




SCALE/ÉCHELLE 1:1




SECTION F–F
SCALE/ÉCHELLE 1:1




DETAIL G
SCALE/ÉCHELLE 5:1

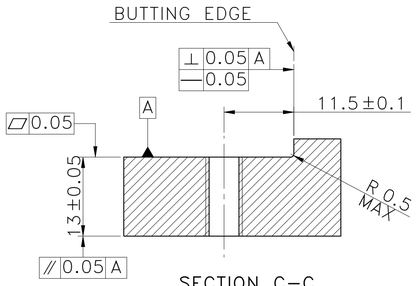


SECTION C–C
SCALE/ÉCHELLE 2:1

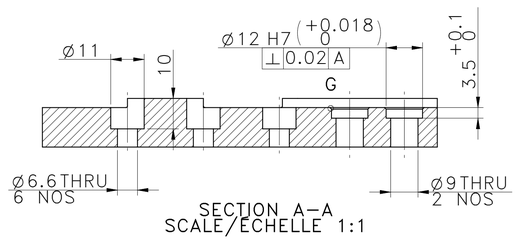

SECTION A–A
SCALE/ÉCHELLE 1:1



SECTION E–E
SCALE/ÉCHELLE 1:1

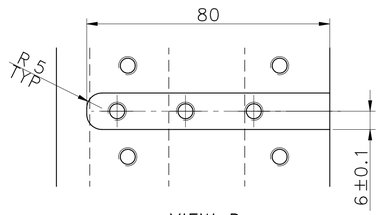

VIEW D
SCALE/ÉCHELLE 1:1

TOLERANCE NOTE :-
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN+0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN ±0.2.

NOTE :-(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :-(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

NOTE : (English)
MATERIAL: HE30
FINISH: SELF–ANODIZING
MACHINING: 3.2
WEIGHT(Kg): 0.74 kg

NOTE :-(French)
MATÉRIEL : HE30
FINITION : SELF–ANODIZING
MACHINES : 3.2
POIDS (Kg): 0.74 kg

NOTE : USE THREADED INSERTS FOR ALL TAPPING HOLE.

RESERVED SPACE FOR STAMP

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(KAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(KAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(MKC) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(MKC) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY
.	.	.	.
.	.	.	.

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: EOT SUPPORT PLATE 1

DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
94.96 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG.	NA	PART CLASS. B	HEAT TREATMENT	NA

DRN.BY	CHKD.BY	APPD.BY	MATERIAL
9265	03004785	03002882	#
11/04/2024	11/04/2024	11/04/2024	NET WEIGHT-Kg 0.74 kg

DRG./PART CODE: P23Y5B151001

REV.: 00

SCALE: 1 : 1

SHEET: 1 OF 1

\\srv01102\Ex0M Uploading\2022-23\P23Y5\P23Y5B151001.dft