

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

TOLERANCE NOTE :-
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN±0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN ±0.2.

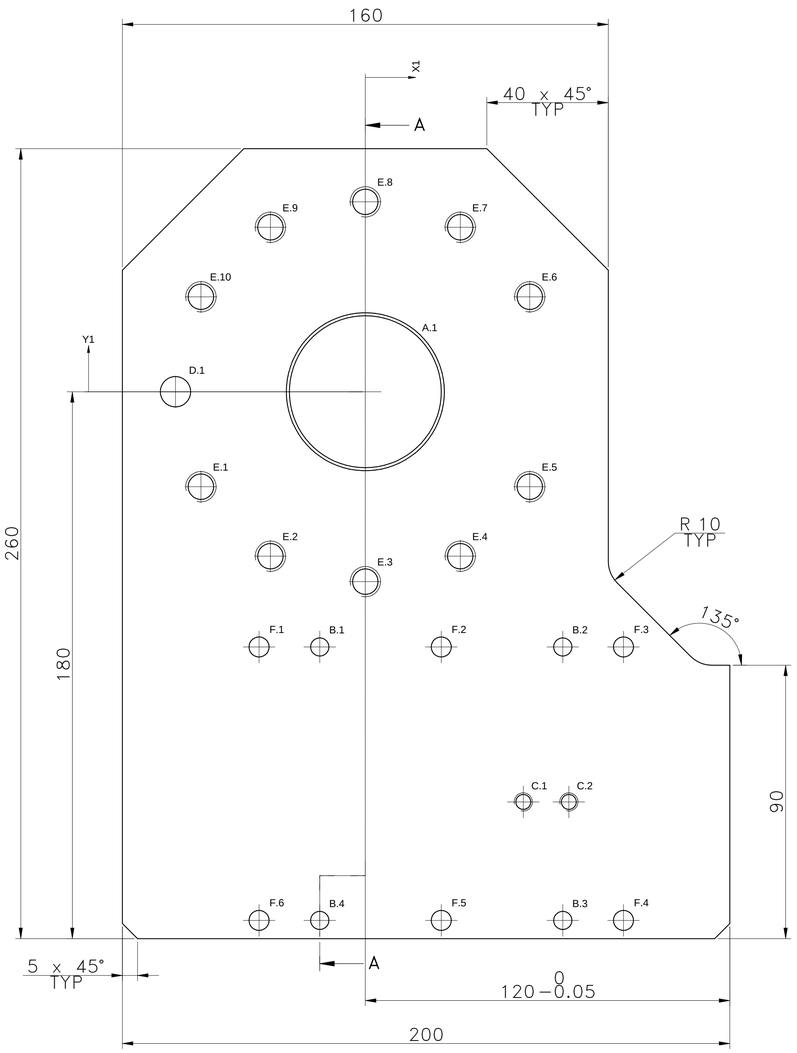

SCALE/ECHELLE 1:1

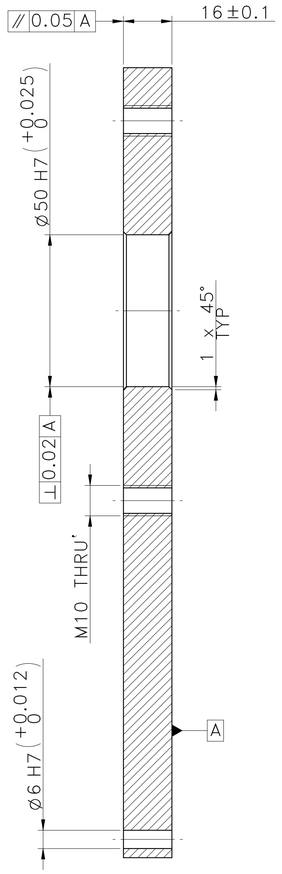

SECTION A-A
SCALE/ECHELLE 1:1

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 50.00 mm THRU'	H7 REF.SEC A-A
B.1	-15.00	-84.00	Ø 6.00 mm THRU'	H7 REF.SEC A-A
B.2	65.00	-84.00	Ø 6.00 mm THRU'	H7 REF.SEC A-A
B.3	65.00	-174.00	Ø 6.00 mm THRU'	H7 REF.SEC A-A
B.4	-15.00	-174.00	Ø 6.00 mm THRU'	H7 REF.SEC A-A
C.1	52.00	-135.00	M6 THRU'	
C.2	67.00	-135.00	M6 THRU'	
D.1	-62.50	0.00	Ø 10.00 mm THRU'	H7
E.1	-54.13	-31.25	M10 THRU'	REF.SEC A-A
E.2	-31.25	-54.13	M10 THRU'	REF.SEC A-A
E.3	0.00	-62.50	M10 THRU'	REF.SEC A-A
E.4	31.25	-54.13	M10 THRU'	REF.SEC A-A
E.5	54.13	-31.25	M10 THRU'	REF.SEC A-A
E.6	54.13	31.25	M10 THRU'	REF.SEC A-A
E.7	31.25	54.13	M10 THRU'	REF.SEC A-A
E.8	0.00	62.50	M10 THRU'	REF.SEC A-A
E.9	-31.25	54.13	M10 THRU'	REF.SEC A-A
E.10	-54.13	31.25	M10 THRU'	REF.SEC A-A
F.1	-35.00	-84.00	Ø 6.60 mm THRU'	
F.2	25.00	-84.00	Ø 6.60 mm THRU'	
F.3	85.00	-84.00	Ø 6.60 mm THRU'	
F.4	85.00	-174.00	Ø 6.60 mm THRU'	
F.5	25.00	-174.00	Ø 6.60 mm THRU'	
F.6	-35.00	-174.00	Ø 6.60 mm THRU'	

NOTE :-(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :-(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE:
1)USE THREADED INSERT AT ALL TAPPING HOLES.
2) MAINTAIN TAP DEPTH, 2 TIMES OF OUTER DIAMETER

NOTE : (English)
MATERIAL: HE30
FINISH: SELF-ANODIZING
MACHINING: 3.2
WEIGHT(Kg): 1.77 kg

NOTE :-(French)
MATÉRIEL : HE30
FINITION : SELF-ANODIZING
MACHINES : 3.2
POIDS (Kg): 1.77 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

RESERVED SPACE FOR
CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

WIPRO PARI GROUP
www.wipropari.com
1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

DESCRIPTION: EOT SUPPORT PLATE 2
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
165.04 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG.	NA	PART CLASS. B	HEAT TREATMENT	NA

LOCATION : PUNE

DRN.BY	CHKD.BY	APPD.BY	MATERIAL
9265	03004785	03002882	#
11/04/2024	11/04/2024	11/04/2024	NET WEIGHT-Kg 1.77 kg

DRG./PART CODE: P23Y5B151002
REV.: 00
SCALE: 1 : 1
SHEET: 1 OF 1

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01102\Vault Uploading\2022-23\P23Y5\P23Y5B151002.dft