NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01

FR-DES-006-01

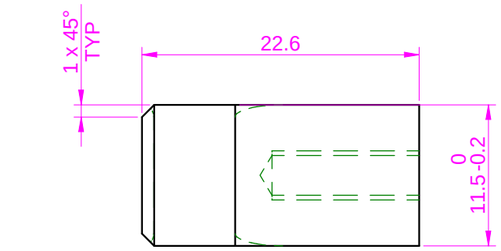
T + S NOTE :

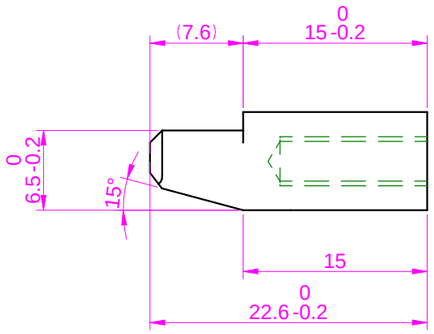
| | |
|---|---|
| H.T.PROCESS | : XXXXX |
| HARDNESS & DEPTH | : XXXXX |
| FINISH & DEPTH | : XXXXX |
| TEST COUPON SIZE | : XXXXX (20mmLENGTH - 01NOS) |
| WELD CLASS | : B IF APPLICABLE |

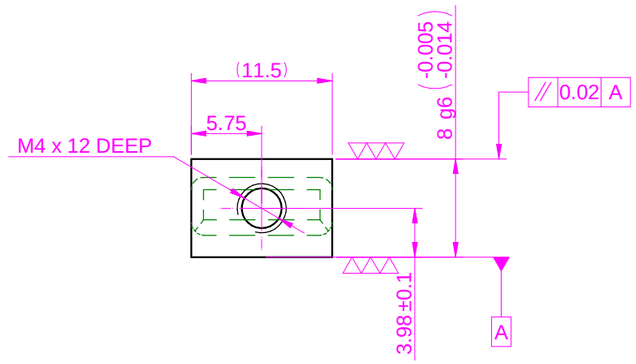
MTC REPORT REQURIED
NON DESTRUCTIVE TESTING (IF APPLICABLE)


| RAW MATERIAL | HEAT TREATMENT | FINISH COMPOMENT |
|---|---|---|
| UT | DP+UT | MPI |

HEAT TREATMENT NOTE :-
1) TO BE CASE HARDENED UPTO 56~60 HRC.
2) CASE DEPTH 0.8~1.2mm.
3) THREADS TO BE KEEP SOFT.
4) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.( IF APPLICABLE )



| DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED | |
|---|---|
| UNSP.RADII 0.5 R | UNSP.CHF. 0.5 X 45° |
| UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm. | |
| UP TO 10 | ±1.5° |
| 10 UP TO 50 | ±0°50' |
| 50 UP TO 120 | ±0°25' |
| 120 UP TO 400 | ±0°15' |
| UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm. | |
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.2 |
| 6 UP TO 30 | ±0.5 |
| 30 UP TO 120 | ±0.8 |
| 120 UP TO 315 | ±1.2 |
| 315 UP TO 1000 | ±2 |
| 1000 UP TO 2000 | ±3 |
| OVER 2000 | ±4 |
| UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm. | |
| UP TO 10 | ±1° |
| 10 UP TO 50 | ±0°30' |
| 50 UP TO 120 | ±0°20' |
| 120 UP TO 400 | ±0°10' |
| UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm. | |
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.1 |
| 6 UP TO 30 | ±0.2 |
| 30 UP TO 120 | ±0.3 |
| 120 UP TO 315 | ±0.5 |
| 315 UP TO 1000 | ±0.8 |
| 1000 UP TO 2000 | ±1.2 |
| OVER 2000 | ±2 |
| LIMITS | |
| Gen Tol.: IS 2102 | |

| REVISION | DESCRIPTION | DATE | DRN.BY |
|---|---|---|---|
| | | | |
| | | | |

wipro pari
www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : ---

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

RESERVED SPACE FOR
CONTROLLED COPY

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

WIPRO PARI GROUP

DESCRIPTION: ANTI ROTATION BLOCK

DRAWING TYPE: MACHINING

| SURFACE AREA | SURFACE TREATMENT | MACHINING | DESIGN UNIT | DESIGN UNIT CD. | TEAM NO. | SHEET SIZE |
|---|---|---|---|---|---|---|
| 1.70 in^2 | I.Z.B.P. (TRIVALENT) | ▽▽(▽▽▽) | WP1 | 0300 | PL-02 | A3 |

REFERENCE DWG. ---
PART CLASS. T+S
HEAT TREATMENT ---

| DRN.BY | CHKD.BY | APPD.BY | MATERIAL | DRG./PART CODE | REV. | SCALE |
|---|---|---|---|---|---|---|
| 80151477 | 80151522 | 80151522 | 20MnCr5 | P23Y5B151011 | 00 | 2 : 1 |
| 10/02/2026 | 10/02/2026 | 10/02/2026 | NET WEIGHT-Kg 0.01 kg | | | SHEET 1 OF 1 |

\\srv01043\Ex\DM Uploading\2022-23\P23Y5\P23Y5B151011.dft