

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

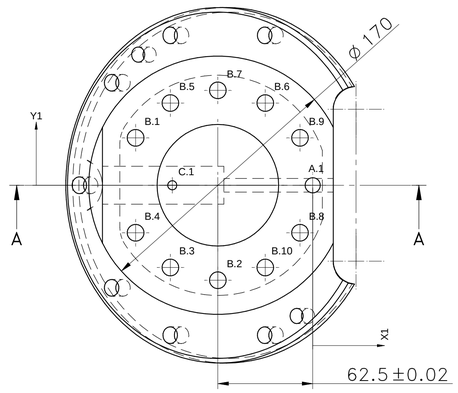


TOP VIEW
SCALE/ECHELLE 1:2




SCALE/ECHELLE 1:2

HOLE TABLE– TOP VIEW				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 10.00 mm THRU'	H7
B.1	−116.63	31.25	Ø 11.00 mm THRU'	
B.10	−31.25	−54.13	Ø 11.00 mm THRU'	
B.2	−62.50	−62.50	Ø 11.00 mm THRU'	
B.3	−93.75	−54.13	Ø 11.00 mm THRU'	
B.4	−116.63	−31.25	Ø 11.00 mm THRU'	
B.5	−93.75	54.13	Ø 11.00 mm THRU'	
B.6	−31.25	54.13	Ø 11.00 mm THRU'	
B.7	−62.50	62.50	Ø 11.00 mm THRU'	
B.8	−8.37	−31.25	Ø 11.00 mm THRU'	
B.9	−8.37	31.25	Ø 11.00 mm THRU'	
C.1	−92.50	0.00	Ø 6.00 mm THRU'	H7

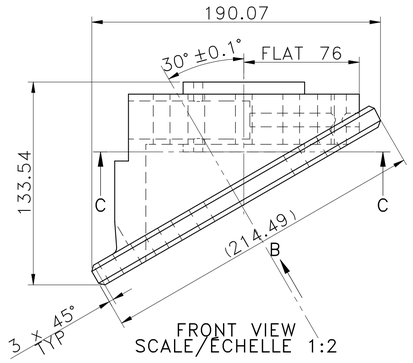


FRONT VIEW
SCALE/ECHELLE 1:2

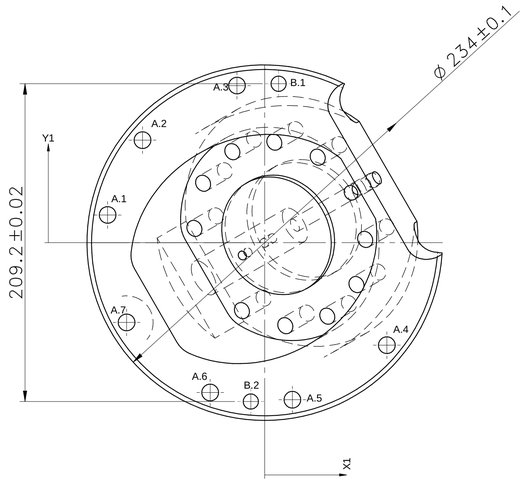


VIEW B
SCALE/ECHELLE 1:2

HOLE TABLE– VIEW B				
Hole	X	Y	Size	REMARK
A.1	−103.40	18.23	Ø 11.00 mm THRU'	
A.2	−80.43	67.49	Ø 11.00 mm THRU'	
A.3	−18.23	103.40	Ø 11.00 mm THRU'	
A.4	80.43	−67.49	Ø 11.00 mm THRU'	
A.5	18.23	−103.40	Ø 11.00 mm THRU'	
A.6	−35.91	−98.67	Ø 11.00 mm THRU'	
A.7	−90.93	−52.50	Ø 11.00 mm THRU'	
B.1	9.15	104.60	Ø 10.00 mm THRU'	H7
B.2	−9.15	−104.60	Ø 10.00 mm THRU'	H7

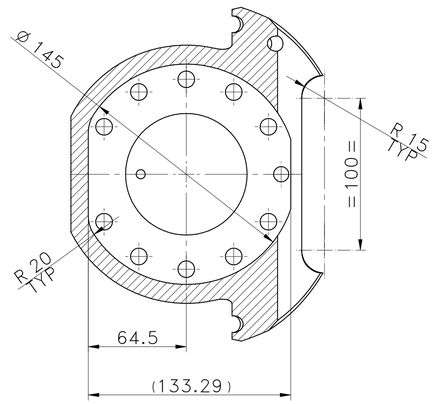

SECTION C–C
SCALE/ECHELLE 1:2

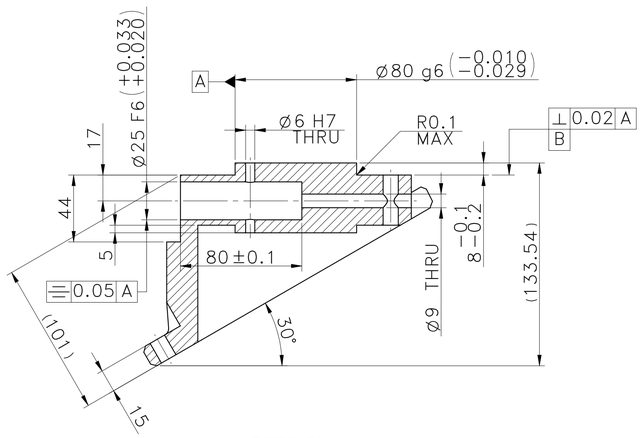

SECTION A–A
SCALE/ECHELLE 1:2

TOLERANCE NOTE :-
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN±0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN ±0.2.

NOTE : (English)
MATERIAL: Aluminum, 7075-T6
FINISH: SELF-ANODIZING
MACHINING: 3.2
WEIGHT(Kg): 3.27 kg

NOTE :-(French)
MATERIEL : Aluminum, 7075-T6
FINITION : SELF-ANODIZING
MACHINES : 3.2
POIDS (Kg): 3.27 kg

NOTE :-(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :-(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

RESERVED SPACE FOR CONTROLLED COPY STAMP

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

www.wipropari.com

WIPRO PARI GROUP

DESCRIPTION: RGM GRIPPER MOUNTING PLATE

DRAWING TYPE: MACHINING

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
4.LOCATION : PUNE

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
238.49 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. — | PART CLASS. B | HEAT TREATMENT —

DRN.BY	CHKD.BY	APPD.BY	MATERIAL
03006330	03004785	03002882	#
03/04/2024	03/04/2024	03/04/2024	NET WEIGHT-Kg 3.27 kg

DRG./PART CODE: P23Y5B153002 | REV.: 00 | SCALE: 1 : 2 | SHEET: 1 OF 1

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01043\E:\eDM Uploading\2022-23\P23Y5\P23Y5B153002.dft