

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

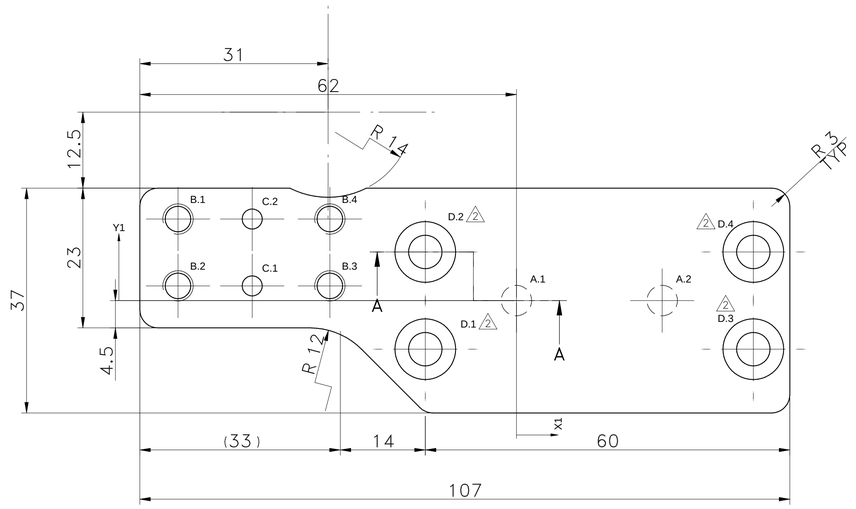


SCALE/ÉCHELLE 2:1

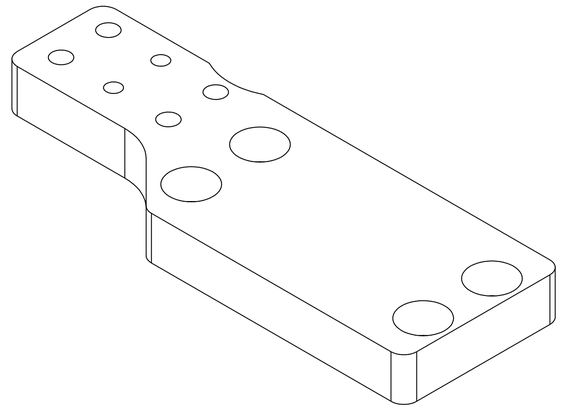


SCALE/ÉCHELLE 2:1

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 5.00 mm x 1.60 mm DEEP	
A.2	24.00	0.00	Ø 5.00 mm x 1.60 mm DEEP	
B.1	−55.71	13.42	M5 THRU'	
B.2	−55.71	2.42	M5 THRU'	
B.3	−30.71	2.42	M5 THRU'	
B.4	−30.71	13.42	M5 THRU'	
C.1	−43.50	2.42	Ø 3.30 mm THRU'	
C.2	−43.50	13.42	Ø 3.30 mm THRU'	
2 D.1	−15.00	−8.00	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm − 7.00 mm DEEP	
2 D.2	−15.00	8.00	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm − 7.00 mm DEEP	
2 D.3	39.00	−8.00	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm − 7.00 mm DEEP	
2 D.4	39.00	8.00	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm − 7.00 mm DEEP	

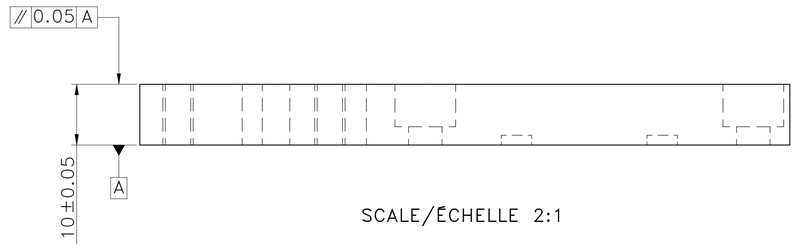

SCALE/ÉCHELLE 2:1

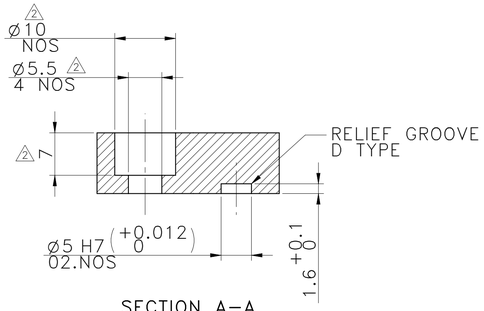

SECTION A−A
SCALE/ÉCHELLE 2:1

TOLERANCE NOTE :− (English)
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN +/− 0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D, SHOULD BE CONTROLLED WITHIN +/− 0.1

NOTE DE TOLERANCE :− (French)
1) TOUT TROU H7 C.D DOIT ÊTRE CONTRÔLÉ SOUS +/− 0.02 / IT7
2) TOUT TROU ET CONTRE−ALESAGE C.D, DOIT ÊTRE CONTROLÉ SOUS +/− 0.1

NOTE :−(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :−(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE : (English)
MATERIAL: Aluminum, 7075−T6
FINISH: SELF−ANODIZING
MACHINING: 3.2
WEIGHT(Kg): 0.09 kg

NOTE :−(French)
MATÉRIEL : Aluminum, 7075−T6
FINITION : SELF−ANODIZING
MACHINES : 3.2
POIDS (Kg): 0.09 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

RESERVED SPACE
CONTROLLED COPY
STAMP

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY
3	NOTE REMOVED (USE INSERT)	01/10/25	03004476
2	M4 COUNTER HOLE CHANGES TO M5	07/08/2024	6166
1	HOLE TABLE UPDATED	06/05/2024	03006330

WIPRO PARI GROUP

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm.
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

DESCRIPTION: **PIN MOUNTING PLATE 01**

DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
17.12 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. ---
PART CLASS. B
HEAT TREATMENT ---

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006330	03004785	03002882	#	P23Y5B153038	03	2 : 1
08/08/2024	08/08/2024	08/08/2024	NET WEIGHT-Kg 0.09 kg			SHEET 1 OF 1

\\srv01043\Edm Uploading\2022-23\P23Y5\P23Y5B153038.dft