


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

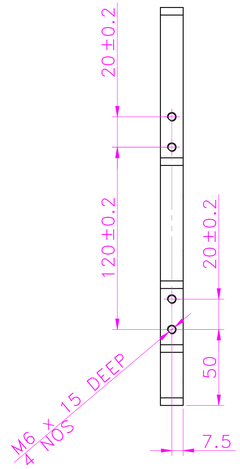


SCALE/ÉCHELLE 1:2

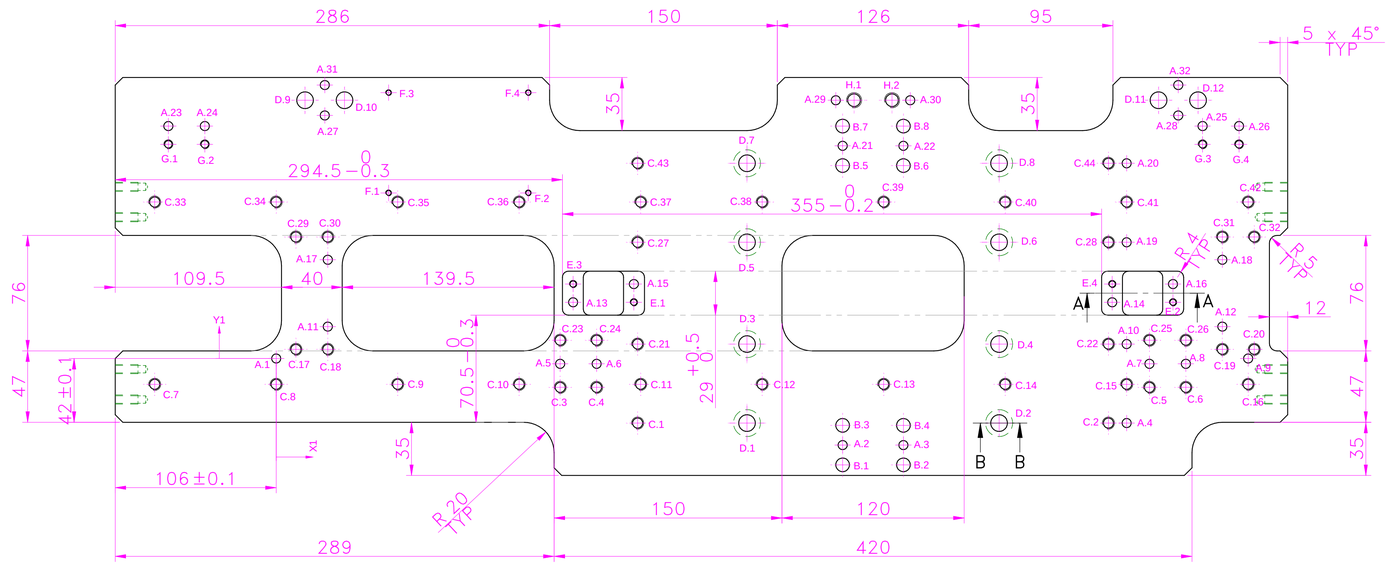


SCALE/ÉCHELLE 1:2

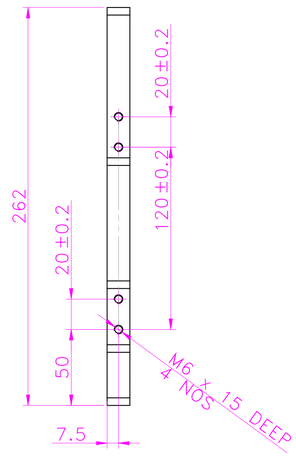


SCALE/ÉCHELLE 1:2

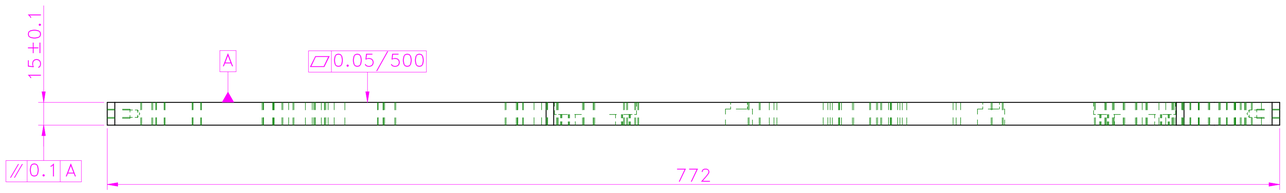


SCALE/ÉCHELLE 1:2



SECTION B–B
SCALE/ÉCHELLE 1:1

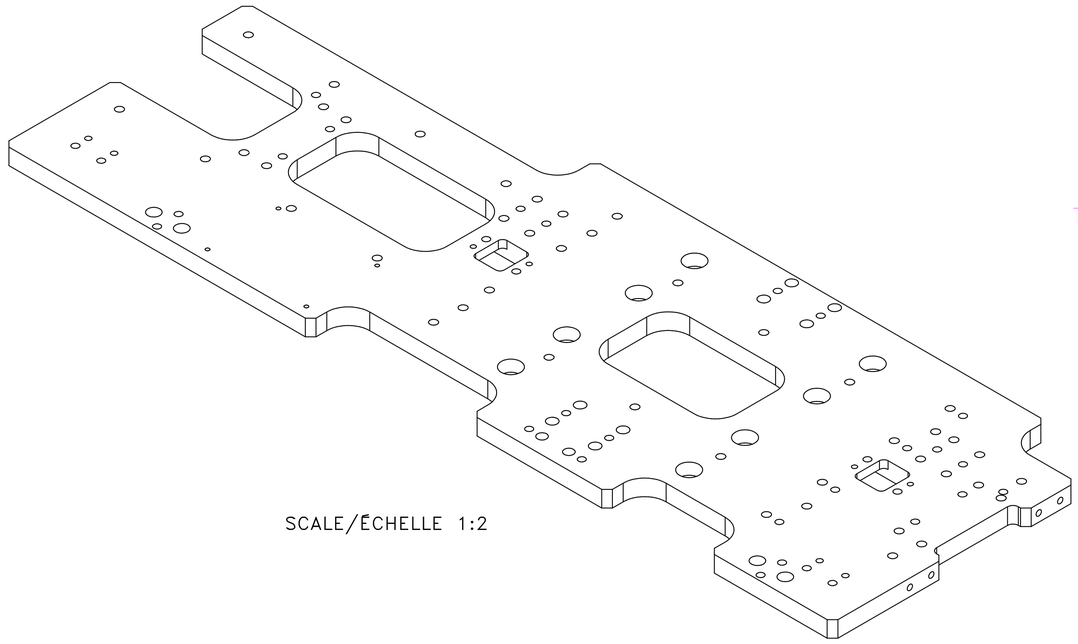

SCALE/ÉCHELLE 1:2

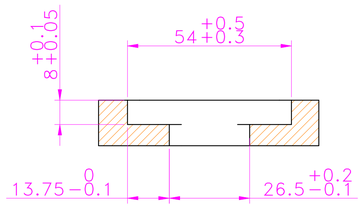

SECTION A–A
SCALE/ÉCHELLE 1:1

NOTE – USE THRAEDED INSERT AT ALL TAPPING HOLE

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE : (English)
MATERIAL: Aluminum, 7075–T6
FINISH: SELF–ANODIZING
MACHINING: 3.2
WEIGHT(Kg): 6.12 kg

NOTE :–(French)
MATÉRIEL : Aluminum, 7075–T6
FINITION : SELF–ANODIZING
MACHINES : 3.2
POIDS (Kg): 6.12 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

RESERVED SPACE FOR COPYRIGHT
CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL (FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL (FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL (M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL (M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY
1	EXTRA DOWEL HOLE REMOVED (4 QTY)	22/04/2024	03006417

wipro PARI
www.wipropari.com

WIPRO PARI GROUP

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

DESCRIPTION		DRAWING TYPE
CARRIAGE PLATE		MACHINING
SURFACE AREA	SURFACE TREATMENT	MACHINING
596.34 in^2	#	#
DESIGN UNIT	DESIGN UNIT CD.	TEAM NO	SHEET SIZE
WPES	0300	PL-02	A1
REFERENCE DWG. P2207012121022	PART CLASS. B	HEAT TREATMENT	—

LOCATION : PUNE	DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
	03006751	03004785	03002882	#	P23Y5B153045	01	1 : 5
	23/04/2024	23/04/2024	23/04/2024	NET WEIGHT-Kg 6.12 kg			SHEET 1 OF 2

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01043\E\dgn Uploading\2022-23\P23Y5\P23Y5B153045.dft

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

HOLE TABLE

Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 6.00 mm THRU'	H7
A.2	373.00	−57.00	Ø 6.00 mm THRU'	H7
A.3	413.00	−57.00	Ø 6.00 mm THRU'	H7
A.4	560.00	−42.50	Ø 6.00 mm THRU'	H7
A.5	187.00	−3.50	Ø 6.00 mm THRU'	H7
A.6	211.00	−3.50	Ø 6.00 mm THRU'	H7
A.7	575.00	−3.50	Ø 6.00 mm THRU'	H7
A.8	599.00	−3.50	Ø 6.00 mm THRU'	H7
A.9	640.00	0.00	Ø 6.00 mm THRU'	H7
A.10	560.00	9.50	Ø 6.00 mm THRU'	H7
A.11	34.00	21.00	Ø 6.00 mm THRU'	H7
A.12	623.00	21.00	Ø 6.00 mm THRU'	H7
A.13	195.50	37.00	Ø 6.00 mm THRU'	H7
A.14	550.50	37.00	Ø 6.00 mm THRU'	H7
A.15	235.50	49.00	Ø 6.00 mm THRU'	H7
A.16	590.50	49.00	Ø 6.00 mm THRU'	H7
A.17	34.00	65.00	Ø 6.00 mm THRU'	H7
A.18	623.00	65.00	Ø 6.00 mm THRU'	H7
A.19	560.00	76.50	Ø 6.00 mm THRU'	H7
A.20	560.00	128.50	Ø 6.00 mm THRU'	H7
A.21	373.00	140.00	Ø 6.00 mm THRU'	H7
A.22	413.00	140.00	Ø 6.00 mm THRU'	H7
A.23	−71.00	153.00	Ø 6.00 mm THRU'	H7
A.24	−47.00	153.00	Ø 6.00 mm THRU'	H7
A.25	610.00	153.00	Ø 6.00 mm THRU'	H7
A.26	634.00	153.00	Ø 6.00 mm THRU'	H7
A.27	32.00	160.00	Ø 6.00 mm THRU'	H7
A.28	594.00	160.00	Ø 6.00 mm THRU'	H7
A.29	368.50	170.00	Ø 6.00 mm THRU'	H7
A.30	417.50	170.00	Ø 6.00 mm THRU'	H7
A.31	32.00	180.00	Ø 6.00 mm THRU'	H7
A.32	594.00	180.00	Ø 6.00 mm THRU'	H7
B.1	373.00	−70.00	Ø 9.00 mm THRU'	
B.2	413.00	−70.00	Ø 9.00 mm THRU'	
B.3	373.00	−44.00	Ø 9.00 mm THRU'	
B.4	413.00	−44.00	Ø 9.00 mm THRU'	
B.5	373.00	127.00	Ø 9.00 mm THRU'	
B.6	413.00	127.00	Ø 9.00 mm THRU'	
B.7	373.00	153.00	Ø 9.00 mm THRU'	
B.8	413.00	153.00	Ø 9.00 mm THRU'	
C.1	238.00	−42.50	M8 THRU'	
C.2	548.00	−42.50	M8 THRU'	
C.3	187.00	−19.00	M8 THRU'	
C.4	211.00	−19.00	M8 THRU'	
C.5	575.00	−19.00	M8 THRU'	

HOLE TABLE

Hole	X	Y	Size	REMARK
C.6	599.00	−19.00	M8 THRU'	
C.7	−80.00	−17.00	M8 THRU'	
C.8	0.00	−17.00	M8 THRU'	
C.9	80.00	−17.00	M8 THRU'	
C.10	160.00	−17.00	M8 THRU'	
C.11	240.00	−17.00	M8 THRU'	
C.12	320.00	−17.00	M8 THRU'	
C.13	400.00	−17.00	M8 THRU'	
C.14	480.00	−17.00	M8 THRU'	
C.15	560.00	−17.00	M8 THRU'	
C.16	640.00	−17.00	M8 THRU'	
C.17	13.00	6.00	M8 THRU'	
C.18	34.00	6.00	M8 THRU'	
C.19	623.00	6.00	M8 THRU'	
C.20	644.00	6.00	M8 THRU'	
C.21	238.00	9.50	M8 THRU'	
C.22	548.00	9.50	M8 THRU'	
C.23	187.00	12.00	M8 THRU'	
C.24	211.00	12.00	M8 THRU'	
C.25	575.00	12.00	M8 THRU'	
C.26	599.00	12.00	M8 THRU'	
C.27	238.00	76.50	M8 THRU'	
C.28	548.00	76.50	M8 THRU'	
C.29	13.00	80.00	M8 THRU'	
C.30	34.00	80.00	M8 THRU'	
C.31	623.00	80.00	M8 THRU'	
C.32	644.00	80.00	M8 THRU'	
C.33	−80.00	103.00	M8 THRU'	
C.34	0.00	103.00	M8 THRU'	
C.35	80.00	103.00	M8 THRU'	
C.36	160.00	103.00	M8 THRU'	
C.37	240.00	103.00	M8 THRU'	
C.38	320.00	103.00	M8 THRU'	
C.39	400.00	103.00	M8 THRU'	
C.40	480.00	103.00	M8 THRU'	
C.41	560.00	103.00	M8 THRU'	
C.42	640.00	103.00	M8 THRU'	
C.43	238.00	128.50	M8 THRU'	
C.44	548.00	128.50	M8 THRU'	
D.1	310.00	−42.50	Ø 11.00 mm THRU' C'BORE Ø 17.80 mm – 10.60 mm DEEP	REF SEC.B−B
D.2	476.00	−42.50	Ø 11.00 mm THRU' C'BORE Ø 17.80 mm – 10.60 mm DEEP	REF SEC.B−B

HOLE TABLE

Hole	X	Y	Size	REMARK
D.3	310.00	9.50	Ø 11.00 mm THRU' C'BORE Ø 17.80 mm – 10.60 mm DEEP	REF SEC.B−B
D.4	476.00	9.50	Ø 11.00 mm THRU' C'BORE Ø 17.80 mm – 10.60 mm DEEP	REF SEC.B−B
D.5	310.00	76.50	Ø 11.00 mm THRU' C'BORE Ø 17.80 mm – 10.60 mm DEEP	REF SEC.B−B
D.6	476.00	76.50	Ø 11.00 mm THRU' C'BORE Ø 17.80 mm – 10.60 mm DEEP	REF SEC.B−B
D.7	310.00	128.50	Ø 11.00 mm THRU' C'BORE Ø 17.80 mm – 10.60 mm DEEP	REF SEC.B−B
D.8	476.00	128.50	Ø 11.00 mm THRU' C'BORE Ø 17.80 mm – 10.60 mm DEEP	REF SEC.B−B
D.9	19.00	170.00	Ø 11.00 mm THRU'	
D.10	45.00	170.00	Ø 11.00 mm THRU'	
D.11	581.00	170.00	Ø 11.00 mm THRU'	
D.12	607.00	170.00	Ø 11.00 mm THRU'	
E.1	235.50	37.00	M5 THRU'	
E.2	590.50	37.00	M5 THRU'	
E.3	195.50	49.00	M5 THRU'	
E.4	550.50	49.00	M5 THRU'	
F.1	74.00	109.00	M4 THRU'	
F.2	166.00	109.00	M4 THRU'	
F.3	74.00	175.00	M4 THRU'	
F.4	166.00	175.00	M4 THRU'	
G.1	−71.00	141.00	M6 THRU'	
G.2	−47.00	141.00	M6 THRU'	
G.3	610.00	141.00	M6 THRU'	
G.4	634.00	141.00	M6 THRU'	
H.1	380.50	170.00	M10 THRU'	
H.2	405.50	170.00	M10 THRU'	

TOLERANCE NOTE :-
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN±0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D, SHOULD BE CONTROLLED WITHIN ±0.2.

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

NOTE : (English)
MATERIAL: Aluminum, 7075−T6
FINISH: SELF−ANODIZING
MACHINING: 3.2
WEIGHT(Kg): 6.12 kg

NOTE :−(French)
MATERIEL : Aluminum, 7075−T6
FINITION : SELF−ANODIZING
MACHINES : 3.2
POIDS (Kg): 6.12 kg

RESERVED SPACE FOR COPYRIGHT
CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY
1	EXTRA DOWEL HOLE REMOVED (4 QTY)	22/04/2024	03006417

WIPRO PARI GROUP
www.wipropari.com
DESCRIPTION: CARRIAGE PLATE
DRAWING TYPE: MACHINING

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
596.34 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. P22070121210 22 | PART CLASS. B | HEAT TREATMENT ---

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006751	03004785	03002882	#	P23Y5B153045	01	1 : 5
23/04/2024	23/04/2024	23/04/2024	NET WEIGHT-Kg 6.12 kg			SHEET 2 OF 2

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01043\E:\COM Uploading\2022--23\P23Y5\P23Y5B153045.dft