


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

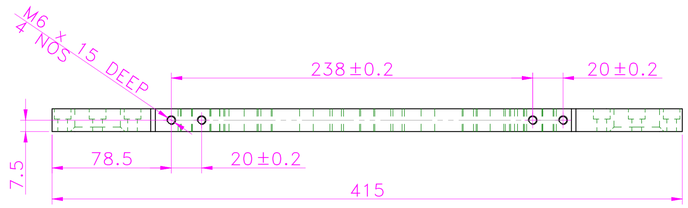


SCALE/ÉCHELLE 1:2

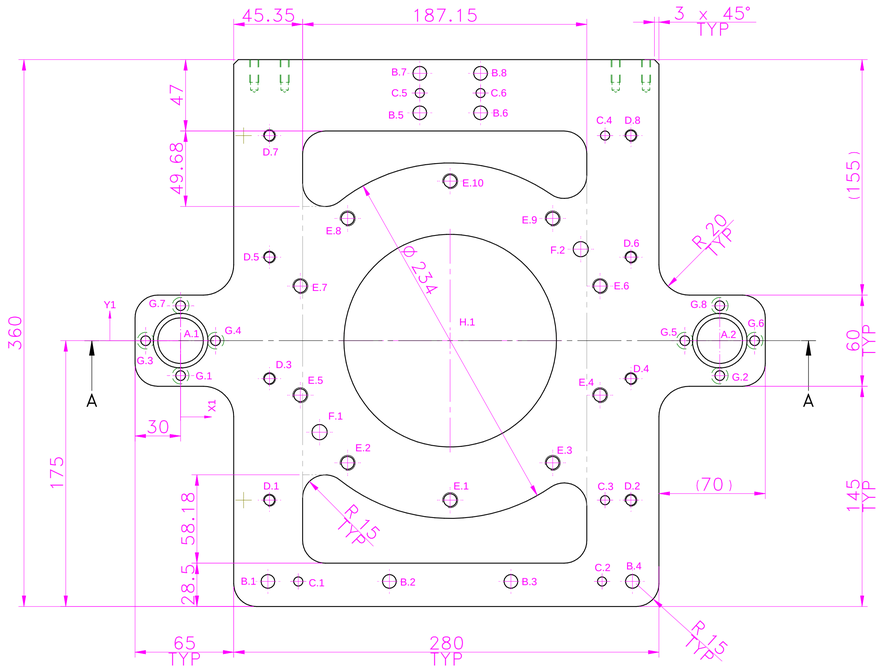


SCALE/ÉCHELLE 1:2

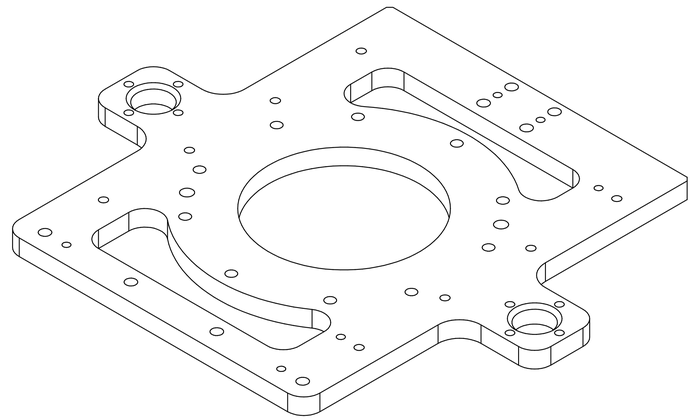

SCALE/ÉCHELLE 1:2

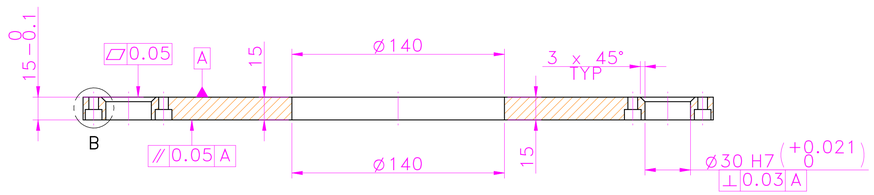

SECTION A–A
SCALE/ÉCHELLE 1:2



DETAIL B
SCALE/ÉCHELLE 1:1

NOTE – USE THRAEDED INSERT AT ALL TAPPING HOLE

NOTE : (English)
MATERIAL: Aluminum, 7075-T6
FINISH: SELF-ANODIZING
MACHINING: 3.2
WEIGHT(Kg): 3.20 kg

NOTE :-(French)
MATÉRIEL : Aluminum, 7075-T6
FINITION : SELF-ANODIZING
MACHINES : 3.2
POIDS (Kg): 3.20 kg

NOTE :-(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :-(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(KAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(KAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(MKC) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(MKC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY
A	MOUNTING HOLE POSITION CHANGES,EXTRA DOWEL HOLE REMOVED & CENTRE CUTOUT MAKE THROUGH	22/04/2024	03006417

wipro PARI
www.wipropari.com

WIPRO PARI GROUP

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

DESCRIPTION: FLOAT PLATE
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
333.78 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. P220701212104 3 | PART CLASS. B | HEAT TREATMENT —

LOCATION : PUNE

DRN.BY	CHKD.BY	APPD.BY	MATERIAL
03006751	03004785	03002882	#
24/04/2024	24/04/2024	24/04/2024	NET WEIGHT-Kg 3.20 kg

DRG./PART CODE: P23Y5B153046 | REV.: 01 | SCALE: 1 : 2 | SHEET: 1 OF 2

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

RESERVED SPACE FOR CONTROLLED COPY

\\srv01043\EJDM Uploading\2022-23\P23Y5\P23Y5B153046.dft

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 30.00 mm THRU'	REF SECTION A–A
A.2	355.00	0.00	Ø 30.00 mm THRU'	REF SECTION A–A
B.1	57.50	−158.50	Ø 9.00 mm THRU'	
B.2	137.50	−158.50	Ø 9.00 mm THRU'	
B.3	217.50	−158.50	Ø 9.00 mm THRU'	
B.4	297.50	−158.50	Ø 9.00 mm THRU'	
B.5	157.50	150.00	Ø 9.00 mm THRU'	
B.6	197.50	150.00	Ø 9.00 mm THRU'	
B.7	157.50	176.00	Ø 9.00 mm THRU'	
B.8	197.50	176.00	Ø 9.00 mm THRU'	
C.1	77.50	−158.50	Ø 6.00 mm THRU'	H7
C.2	277.50	−158.50	Ø 6.00 mm THRU'	H7
C.3	279.50	−105.00	Ø 6.00 mm THRU'	H7
C.4	279.50	135.00	Ø 6.00 mm THRU'	H7
C.5	157.50	163.00	Ø 6.00 mm THRU'	H7
C.6	197.50	163.00	Ø 6.00 mm THRU'	H7
D.1	58.50	−105.00	M8 THRU'	
D.2	296.50	−105.00	M8 THRU'	
D.3	58.50	−25.00	M8 THRU'	
D.4	296.50	−25.00	M8 THRU'	
D.5	58.50	55.00	M8 THRU'	
D.6	296.50	55.00	M8 THRU'	
D.7	58.50	135.00	M8 THRU'	
D.8	296.50	135.00	M8 THRU'	
E.1	177.50	−105.00	M10 THRU'	
E.2	110.01	−80.43	M10 THRU'	

HOLE TABLE				
Hole	X	Y	Size	REMARK
E.3	244.99	−80.43	M10 THRU'	
E.4	276.17	−35.91	M10 THRU'	
E.5	78.83	−35.91	M10 THRU'	
E.6	276.17	35.91	M10 THRU'	
E.7	78.83	35.91	M10 THRU'	
E.8	110.01	80.43	M10 THRU'	
E.9	244.99	80.43	M10 THRU'	
E.10	177.50	105.00	M10 THRU'	
F.1	91.49	−60.23	Ø 10.00 mm THRU'	H7
F.2	263.51	60.23	Ø 10.00 mm THRU'	H7
G.1	0.00	−23.00	Ø 6.40 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF DETAILVIEW B
G.2	355.00	−23.00	Ø 6.40 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF DETAILVIEW B
G.3	−23.00	0.00	Ø 6.40 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF DETAILVIEW B
G.4	23.00	0.00	Ø 6.40 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF DETAILVIEW B
G.5	332.00	0.00	Ø 6.40 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF DETAILVIEW B
G.6	378.00	0.00	Ø 6.40 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF DETAILVIEW B
G.7	0.00	23.00	Ø 6.40 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF DETAILVIEW B
G.8	355.00	23.00	Ø 6.40 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF DETAILVIEW B
H.1	177.50	0.00		REF SECTION A–A

TOLERANCE NOTE :-
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN±0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN ±0.2.

NOTE : (English)
MATERIAL: Aluminum, 7075–T6
FINISH: SELF–ANODIZING
MACHINING:
WEIGHT(Kg): 3.20 kg

NOTE :–(French)
MATÉRIEL : Aluminum, 7075–T6
FINITION : SELF–ANODIZING
MACHINES :
POIDS (Kg): 3.20 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

RESERVED SPACE FOR CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(MFG) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

REVISION	DESCRIPTION	DATE	DRN.BY
A	MOUNTING HOLE POSITION CHANGES,EXTRA DOWEL HOLE REMOVED & CENTRE CUTOUT MAKE THROUGH	22/04/2024	03006417

LIMITS
Gen Tol.: IS 2102

www.wipropari.com

WIPRO PARI GROUP

DESCRIPTION: FLOAT PLATE

DRAWING TYPE: MACHINING

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT, ASK TEAM MEMBER
LOCATION : PUNE

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
333.78 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. P2207012121043 | PART CLASS. B | HEAT TREATMENT —

DRN.BY	CHKD.BY	APPD.BY	MATERIAL
03006751	03004785	03002882	#
24/04/2024	24/04/2024	24/04/2024	NET WEIGHT-Kg 3.20 kg

DRG./PART CODE: P23Y5B153046 | REV.: 01 | SCALE: 1 : 2 | SHEET: 2 OF 2

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srvd1043\E-DOM Uploading\2022--23\P23Y\P23Y5B153046.dft