

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

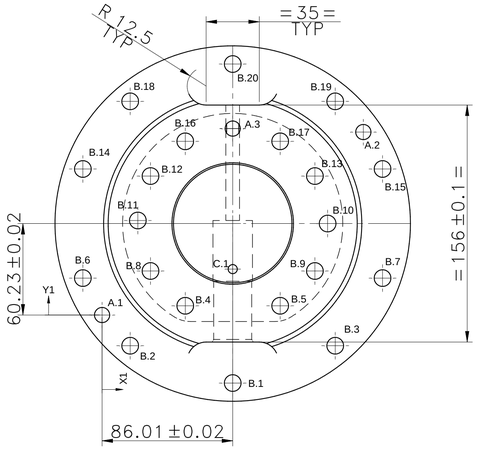



SCALE/ÉCHELLE 1:2

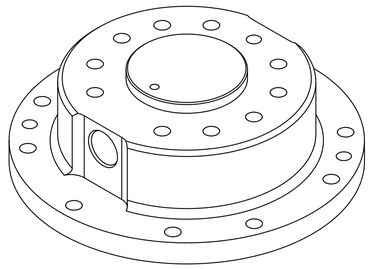


SCALE/ÉCHELLE 1:2


| HOLE TABLE | | | | |
|---|---|---|---|---|
| Hole | X | Y | Size | REMARK |
| A.1 | 0.00 | 0.00 | Ø 10.00 mm THRU' | H7 |
| A.2 | 172.02 | 120.45 | Ø 10.00 mm THRU' | H7 |
| A.3 | 86.01 | 122.73 | Ø 10.00 mm x 20.00 mm DEEP | H7 |
| B.1 | 86.01 | −44.77 | Ø 11.00 mm THRU' | |
| B.2 | 18.52 | −20.21 | Ø 11.00 mm THRU' | |
| B.3 | 153.50 | −20.21 | Ø 11.00 mm THRU' | |
| B.4 | 54.76 | 6.10 | Ø 11.00 mm THRU' | |
| B.5 | 117.26 | 6.10 | Ø 11.00 mm THRU' | |
| B.6 | −12.66 | 24.31 | Ø 11.00 mm THRU' | |
| B.7 | 184.68 | 24.31 | Ø 11.00 mm THRU' | |
| B.8 | 31.88 | 28.98 | Ø 11.00 mm THRU' | |
| B.9 | 140.14 | 28.98 | Ø 11.00 mm THRU' | |
| B.10 | 148.51 | 60.23 | Ø 11.00 mm THRU' | |
| B.11 | 23.54 | 62.23 | Ø 11.00 mm THRU' | |
| B.12 | 31.88 | 91.48 | Ø 11.00 mm THRU' | |
| B.13 | 140.14 | 91.48 | Ø 11.00 mm THRU' | |
| B.14 | −12.66 | 96.14 | Ø 11.00 mm THRU' | |
| B.15 | 184.68 | 96.14 | Ø 11.00 mm THRU' | |
| B.16 | 54.76 | 114.35 | Ø 11.00 mm THRU' | |
| B.17 | 117.26 | 114.35 | Ø 11.00 mm THRU' | |
| B.18 | 18.52 | 140.66 | Ø 11.00 mm THRU' | |
| B.19 | 153.50 | 140.66 | Ø 11.00 mm THRU' | |
| B.20 | 86.01 | 165.23 | Ø 11.00 mm THRU' | |
| C.1 | 86.01 | 30.23 | Ø 6.00 mm x 15.00 mm DEEP | H7 |

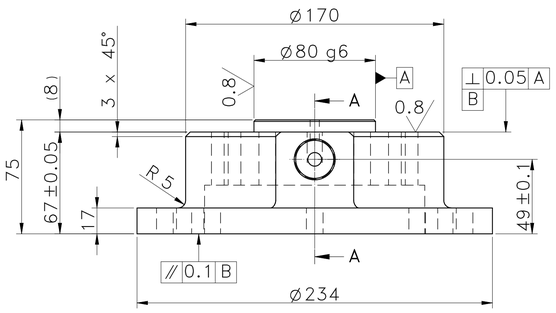


SCALE/ÉCHELLE 1:2

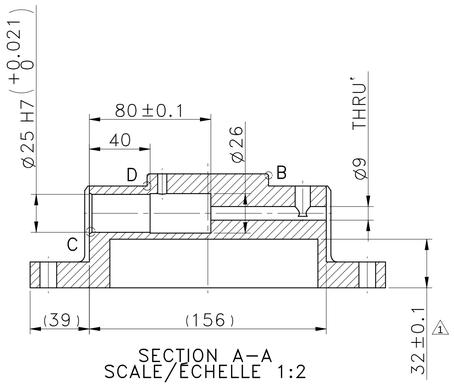



SECTION A–A
SCALE/ÉCHELLE 1:2





DETAIL B
SCALE/ÉCHELLE 2:1

DETAIL C
SCALE/ÉCHELLE 2:1

TOLERANCE NOTE :-
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN±0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D, SHOULD BE CONTROLLED WITHIN ±0.2.

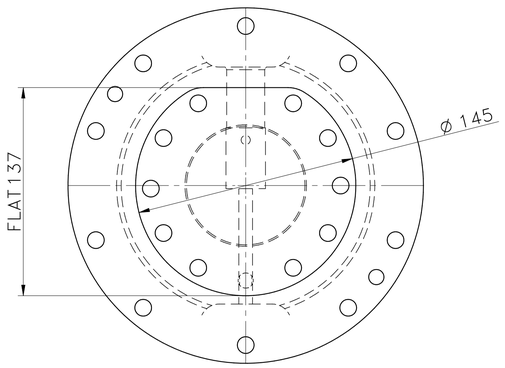


SCALE/ÉCHELLE 1:2

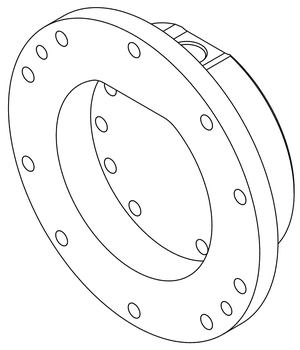

SCALE/ÉCHELLE 1:2




DETAIL D
SCALE/ÉCHELLE 2:1

NOTE :-(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :-(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE : (English)
# MATERIAL: Aluminum, 7075-T6
# FINISH: SELF-ANODIZING
# MACHINING: 3.2
# WEIGHT(Kg ): 3.53 kg

NOTE :-(French)
# MATÉRIEL : Aluminum, 7075-T6
# FINITION : SELF-ANODIZING
# MACHINES : 3.2
# POIDS (Kg): 3.53 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : MW

RESERVED SPACE FOR CONTROLLED COPY STAMP

CONTROLLED COPY

| DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED | |
|---|---|
| UNSP.RADII | UNSP.CHF. |
| 0.5 R | 0.5 X 45° |
| UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm. | |
| UP TO 10 | ±1.5° |
| 10 UP TO 50 | ±0°50' |
| 50 UP TO 120 | ±0°25' |
| 120 UP TO 400 | ±0°15' |
| UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm. | |
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.2 |
| 6 UP TO 30 | ±0.5 |
| 30 UP TO 120 | ±0.8 |
| 120 UP TO 315 | ±1.2 |
| 315 UP TO 1000 | ±2 |
| 1000 UP TO 2000 | ±3 |
| OVER 2000 | ±4 |
| UNSPECIFIED TOL.(MC) FOR ANGULAR IN mm. | |
| UP TO 10 | ±1° |
| 10 UP TO 50 | ±0°30' |
| 50 UP TO 120 | ±0°20' |
| 120 UP TO 400 | ±0°10' |
| UNSPECIFIED TOL.(MC) FOR LINEAR IN mm. | |
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.1 |
| 6 UP TO 30 | ±0.2 |
| 30 UP TO 120 | ±0.3 |
| 120 UP TO 315 | ±0.5 |
| 315 UP TO 1000 | ±0.8 |
| 1000 UP TO 2000 | ±1.2 |
| OVER 2000 | ±2 |
| LIMITS | |
| Gen Tol.: IS 2102 | |

| REVISION | DESCRIPTION | DATE | DRN.BY |
|---|---|---|---|
| 1 | MISDSING DIMENSION ADDED. (REF SECTION A-A) | 11/04/2024 | 03006751 |

www.wipropari.com

WIPRO PARI GROUP

DESCRIPTION: **ROBOT MOUNTING PLATE**

DRAWING TYPE: MACHINING

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

| SURFACE AREA | SURFACE TREATMENT | MACHINING | DESIGN UNIT | DESIGN UNIT CD. | TEAM NO. | SHEET SIZE |
|---|---|---|---|---|---|---|
| 253.94 in^2 | # | # | WPES | 0300 | PL-02 | A1 |

REFERENCE DWG. P2207012121012 | PART CLASS. B | HEAT TREATMENT ---

LOCATION : PUNE

| DRN.BY | CHKD.BY | APPD.BY | MATERIAL |
|---|---|---|---|
| 03006751 | 03004785 | 03002882 | # |
| 11/04/2024 | 11/04/2024 | 11/04/2024 | NET WEIGHT-Kg 3.53 kg |

DRG./PART CODE: **P23Y5B153081**

REV.: **01**

SCALE: 1 : 2

SHEET 1 OF 1

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01102\E:\DM Uploading\2022-23\P23Y5\P23Y5B153081.dft