


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 PFR-DES-07-REV-05

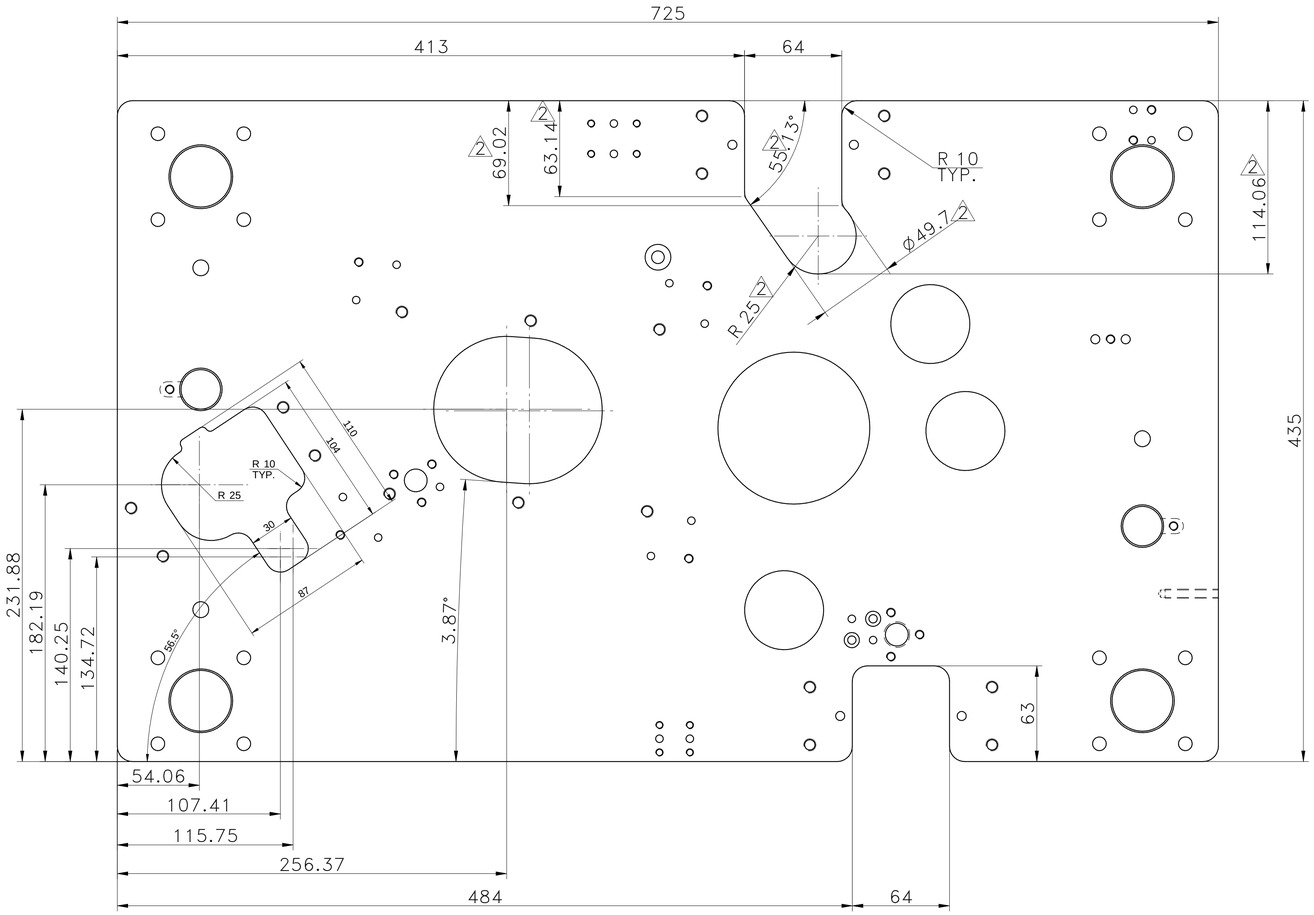


SCALE/ÉCHELLE 1:2

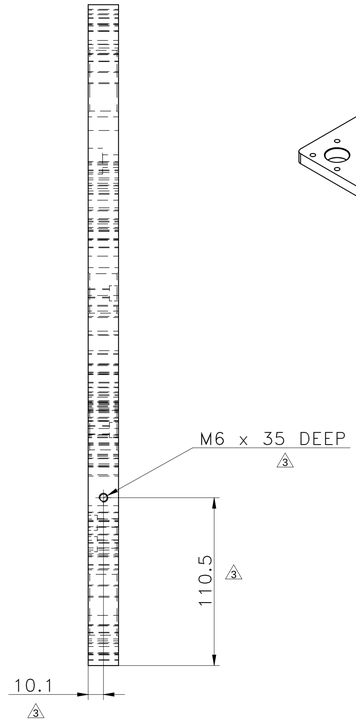

SCALE/ÉCHELLE 1:2

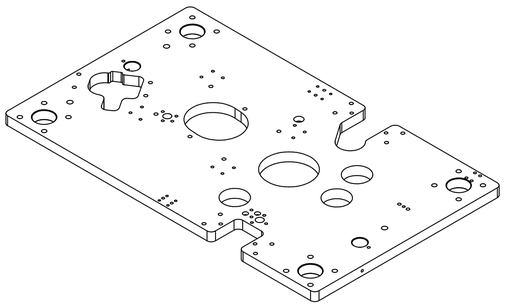

SCALE/ÉCHELLE 1:5

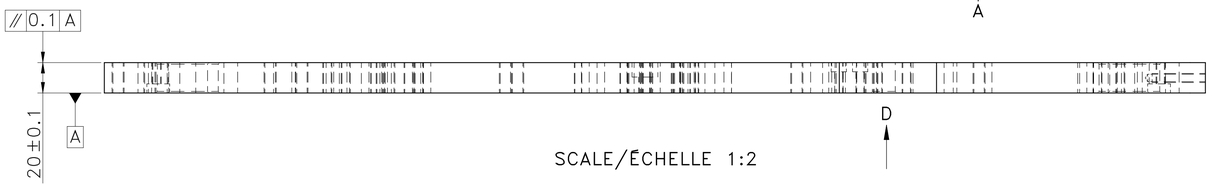

SCALE/ÉCHELLE 1:2

NOTE :-(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :-(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

NOTE : (English)
MATERIAL: AL HE30 T6
FINISH: SELF-ANODIZING
MACHINING:
WEIGHT(Kg): 14.84 kg

NOTE :-(French)
MATÉRIEL : AL HE30 T6
FINITION : SELF-ANODIZING
MACHINES :
POIDS (Kg): 14.84 kg

RESERVED SPACE FOR CONTROLLED COPY STAMP

CONTROLLED COPY

REVISION	DESCRIPTION	DATE	DRN.BY
3	M6 TAPPING HOLE ADDED REF SHEET NO-01	24.07.25	7273
2	HOLE SIZE &CUT SIZE INCREASED (Ref sheet-02&03)	12/12/2024	03006330
1	HOLES SHIFTED IN X & Y DIRECTION	21.03.2024	9255

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

WIPRO PARI GROUP

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
4.LOCATION : PUNE

DESCRIPTION: CEILING PLATE
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
1027.77 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. ---
PART CLASS. B
HEAT TREATMENT ---


DRN.BY	CHKD.BY	APPD.BY	MATERIAL
03006517	03004785	03002882	#
24/07/2025	24/07/2025	24/07/2025	NET WEIGHT-Kg 14.84 kg

DRG./PART CODE: P23Y5B154223
REV.: 03
SCALE: 1 : 2
SHEET: 1 OF 3


© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01102\E:\dwl Uploading\2022-23\P23Y5\P23Y5B154223.dft


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 PFR-DES-07-REV-05

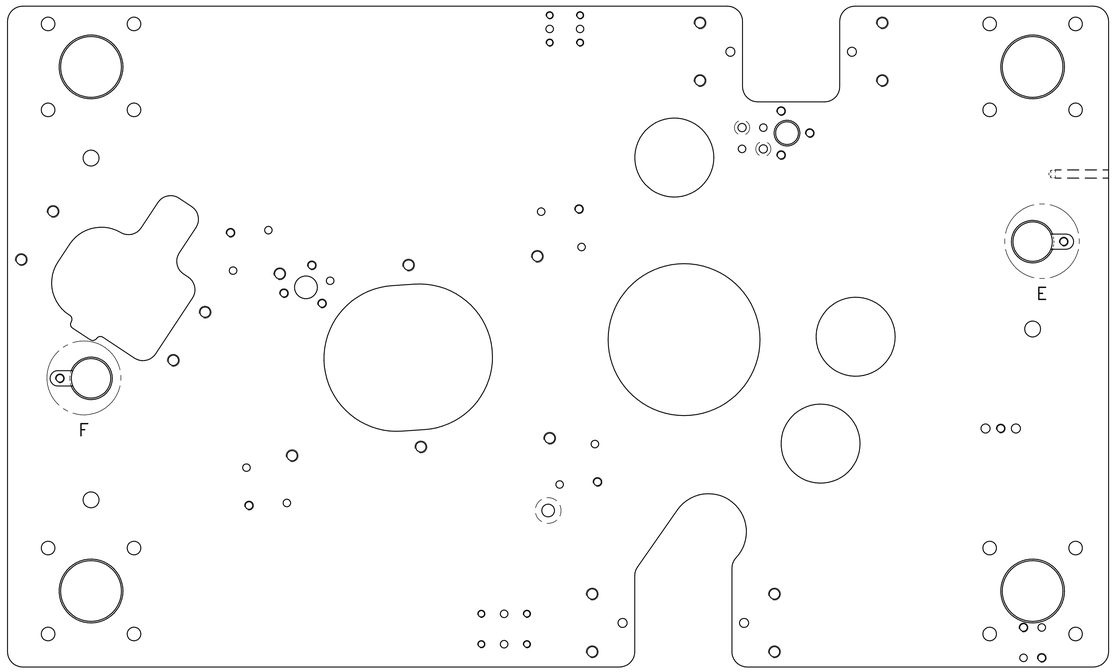


VIEW D
SCALE/ECHELLE 1:2

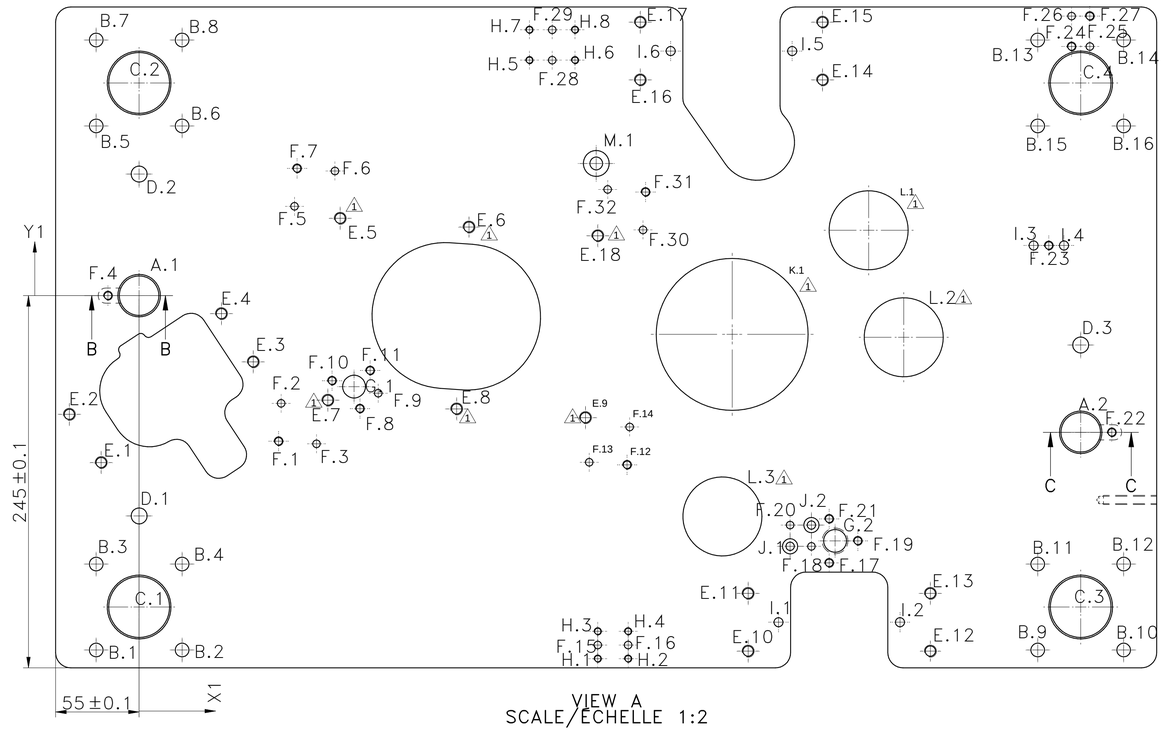


VIEW A
SCALE/ECHELLE 1:2

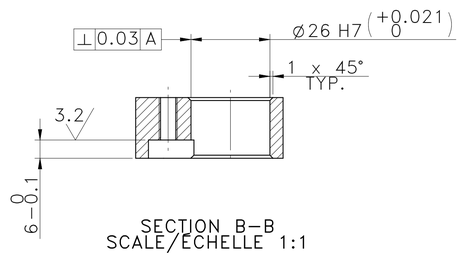


SECTION B–B
SCALE/ECHELLE 1:1

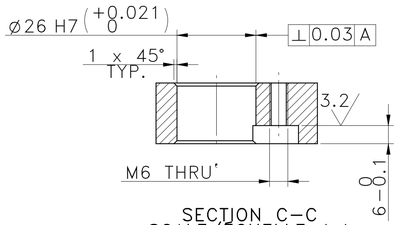

SECTION C–C
SCALE/ECHELLE 1:1

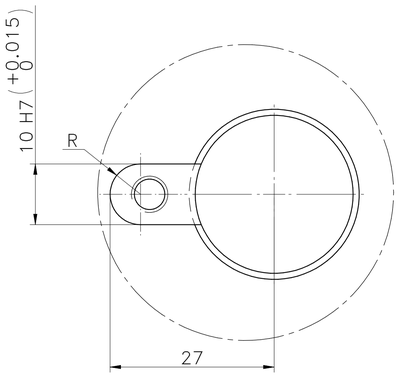

DETAIL F
SCALE/ECHELLE 2:1

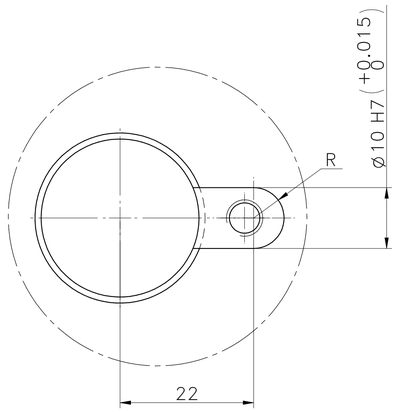

DETAIL E
SCALE/ECHELLE 2:1

NOTE : USE THREADED INSERTS FOR ALL TAPPING HOLE.

NOTE : (English)
MATERIAL: AL HE30 T6
FINISH: SELF-ANODIZING
MACHINING: 3.2
WEIGHT(Kg): 14.84 kg

NOTE :-(French)
MATERIEL : AL HE30 T6
FINITION : SELF-ANODIZING
MACHINES : 3.2
POIDS (Kg): 14.84 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

RESERVED SPACE FOR STAMP

CONTROLLED COPY

REVISION	DESCRIPTION	DATE	DRN.BY
3	M6 TAPPING HOLE ADDED REF SHEET NO-01	24.07.25	7273
2	HOLE SIZE &CUT SIZE INCREASED (Ref sheet-02&03)	12/12/2024	03006330
1	HOLES SHIFTED IN X & Y DIRECTION	21.03.2024	9255

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

WIPRO PARI GROUP

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

DESCRIPTION: CEILING PLATE
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
1027.77 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. --- | PART CLASS. B | HEAT TREATMENT ---

LOCATION : PUNE

DRN.BY	CHKD.BY	APPD.BY	MATERIAL
03006517	03004785	03002882	#
24/07/2025	24/07/2025	24/07/2025	NET WEIGHT-Kg 14.84 kg

DRG./PART CODE: P23Y5B154223 | REV.: 03 | SCALE: 1 : 2 | SHEET: 2 OF 3

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01102\EJOM Uploading\2022-23\P23Y5\P23Y5B154223.dft

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 PFR-DES-07-REV-05

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 26.00 mm THRU'	H7 HOLE
A.2	620.00	−90.00	Ø 26.00 mm THRU'	H7 HOLE
B.1	−28.28	−233.28	Ø 9.00 mm THRU'	
B.2	28.28	−233.28	Ø 9.00 mm THRU'	
B.3	−28.28	−176.72	Ø 9.00 mm THRU'	
B.4	28.28	−176.72	Ø 9.00 mm THRU'	
B.5	−28.28	111.72	Ø 9.00 mm THRU'	
B.6	28.28	111.72	Ø 9.00 mm THRU'	
B.7	−28.28	168.28	Ø 9.00 mm THRU'	
B.8	28.28	168.28	Ø 9.00 mm THRU'	
B.9	591.72	−233.28	Ø 9.00 mm THRU'	
B.10	648.28	−233.28	Ø 9.00 mm THRU'	
B.11	591.72	−176.72	Ø 9.00 mm THRU'	
B.12	648.28	−176.72	Ø 9.00 mm THRU'	
B.13	591.72	168.28	Ø 9.00 mm THRU'	
B.14	648.28	168.28	Ø 9.00 mm THRU'	
B.15	591.72	111.72	Ø 9.00 mm THRU'	
B.16	648.28	111.72	Ø 9.00 mm THRU'	
C.1	0.00	−205.00	Ø 40.00 mm THRU'	H7 HOLE
C.2	0.00	140.00	Ø 40.00 mm THRU'	H7 HOLE
C.3	620.00	−205.00	Ø 40.00 mm THRU'	H7 HOLE
C.4	620.00	140.00	Ø 40.00 mm THRU'	H7 HOLE
D.1	0.00	−145.00	Ø 10.50 mm THRU'	
D.2	0.00	80.00	Ø 10.50 mm THRU'	
D.3	620.00	−32.50	Ø 10.50 mm THRU'	
E.1	−24.98	−109.87	M8 THRU'	
E.2	−45.93	−78.17	M8 THRU'	
E.3	75.13	−43.57	M8 THRU'	
E.4	54.20	−11.85	M8 THRU'	
E.5	132.39	50.90	M8 THRU'	
E.6	217.20	45.16	M8 THRU'	
E.7	124.28	−68.83	M8 THRU'	
E.8	209.09	−74.57	M8 THRU'	
E.9	293.89	−80.31	M8 THRU'	

HOLE TABLE				
Hole	X	Y	Size	REMARK
E.10	401.00	−234.00	M8 THRU'	
E.11	401.00	−196.00	M8 THRU'	
E.12	521.00	−234.00	M8 THRU'	
E.13	521.00	−196.00	M8 THRU'	
E.14	450.00	142.00	M8 THRU'	
E.15	450.00	180.00	M8 THRU'	
E.16	330.00	142.00	M8 THRU'	
E.17	330.00	180.00	M8 THRU'	
E.18	302.00	39.41	M8 THRU'	
F.1	91.84	−95.85	M6 THRU'	
F.2	93.53	−70.91	Ø 5.00 mm THRU'	H7 HOLE
F.3	116.79	−97.54	Ø 5.00 mm THRU'	H7 HOLE
F.4	−20.50	0.00	M6 THRU'	
F.5	102.32	58.79	Ø 5.00 mm THRU'	H7 HOLE
F.6	128.95	82.05	Ø 5.00 mm THRU'	H7 HOLE
F.7	104.01	83.74	M6 THRU'	
F.8	145.40	−74.39	M6 THRU'	
F.9	157.45	−64.22	Ø 5.00 mm THRU'	H7 HOLE
F.10	127.03	−56.02	M6 THRU'	
F.11	152.13	−49.29	M6 THRU'	
F.12	321.32	−111.39	M6 THRU'	
F.13	296.37	−109.70	Ø 5.00 mm THRU'	H7 HOLE
F.14	323.01	−86.45	Ø 5.00 mm THRU'	H7 HOLE
F.15	302.00	−230.00	Ø 5.00 mm THRU'	H7 HOLE
F.16	322.00	−230.00	Ø 5.00 mm THRU'	H7 HOLE
F.17	454.39	−175.93	M6 THRU'	
F.18	442.67	−165.04	Ø 5.00 mm THRU'	H7 HOLE
F.19	473.27	−161.44	M6 THRU'	
F.20	428.67	−151.04	Ø 5.00 mm THRU'	H7 HOLE
F.21	454.39	−146.95	M6 THRU'	
F.22	640.50	−90.00	M6 THRU'	
F.23	599.00	33.00	M6 THRU'	
F.24	614.00	164.00	M6 THRU'	
F.25	626.00	164.00	Ø 5.00 mm THRU'	H7 HOLE

HOLE TABLE				
Hole	X	Y	Size	REMARK
F.26	614.00	184.00	Ø 5.00 mm THRU'	H7 HOLE
F.27	626.00	184.00	M6 THRU'	
F.28	272.00	155.00	Ø 5.00 mm THRU'	H7 HOLE
F.29	272.00	175.00	Ø 5.00 mm THRU'	H7 HOLE
F.30	331.79	43.25	Ø 5.00 mm THRU'	H7 HOLE
F.31	333.48	68.20	M6 THRU'	
F.32	308.54	69.88	Ø 5.00 mm THRU'	H7 HOLE
G.1	141.52	−59.90	Ø 15.00 mm THRU'	H7 HOLE
G.2	458.27	−161.44	Ø 15.00 mm THRU'	H7 HOLE
H.1	302.00	−239.00	M5 THRU'	
H.2	322.00	−239.00	M5 THRU'	
H.3	302.00	−221.00	M5 THRU'	
H.4	322.00	−221.00	M5 THRU'	
H.5	257.00	155.00	M5 THRU'	
H.6	287.00	155.00	M5 THRU'	
H.7	257.00	175.00	M5 THRU'	
H.8	287.00	175.00	M5 THRU'	
I.1	421.00	−215.00	Ø 6.00 mm THRU'	H7 HOLE
I.2	501.00	−215.00	Ø 6.00 mm THRU'	H7 HOLE
I.3	589.00	33.00	Ø 6.00 mm THRU'	H7 HOLE
I.4	609.00	33.00	Ø 6.00 mm THRU'	H7 HOLE
I.5	430.00	161.00	Ø 6.00 mm THRU'	H7 HOLE
I.6	350.00	161.00	Ø 6.00 mm THRU'	H7 HOLE
J.1	428.67	−165.04	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm − 6.00 mm DEEP	
J.2	442.67	−151.04	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm − 6.00 mm DEEP	
K.1	390.50	−25.50	Ø 100.00 mm THRU'	
2 L.1	480.37	43.00	Ø 52.00 mm THRU'	
2 L.2	503.48	−27.39	Ø 52.00 mm THRU'	
2 L.3	384.06	−145.33	Ø 52.00 mm THRU'	
M.1	301.00	87.00	Ø 8.40 mm THRU' C'BORE Ø 17.00 mm − 9.50 mm DEEP	

TOLERANCE NOTE :−
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN±0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D, SHOULD BE CONTROLLED WITHIN ±0.2.

NOTE : (English)
MATERIAL: AL HE30 T6
FINISH: SELF−ANODIZING
MACHINING: 3.2
WEIGHT(Kg): 14.84 kg

NOTE :−(French)
MATERIEL : AL HE30 T6
FINITION : SELF−ANODIZING
MACHINES : 3.2
POIDS (Kg): 14.84 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

RESERVED SPACE
CONTROLLED COPY
STAMP

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY
3	M6 TAPPING HOLE ADDED REF SHEET NO−01	24.07.25	7273
2	HOLE SIZE &CUT SIZE INCREASED (Ref sheet-02&03)	12/12/2024	03006330
1	HOLES SHIFTED IN X & Y DIRECTION	21.03.2024	9255

www.wipropari.com

WIPRO PARI GROUP

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

DESCRIPTION: CEILING PLATE
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
1027.77 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. —
PART CLASS. B
HEAT TREATMENT —

DRN.BY	CHKD.BY	APPD.BY	MATERIAL
03006517	03004785	03002882	#
24/07/2025	24/07/2025	24/07/2025	NET WEIGHT-Kg 14.84 kg

DRG./PART CODE: P23Y5B154223
REV.: 03
SCALE: 1 : 2
SHEET: 3 OF 3

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

CONTROLLED COPY

\\srv0102\E:\DM Uploading\2022-23\P23Y5\P23Y5B154223.dft