

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 PFR-DES-07-REV-05

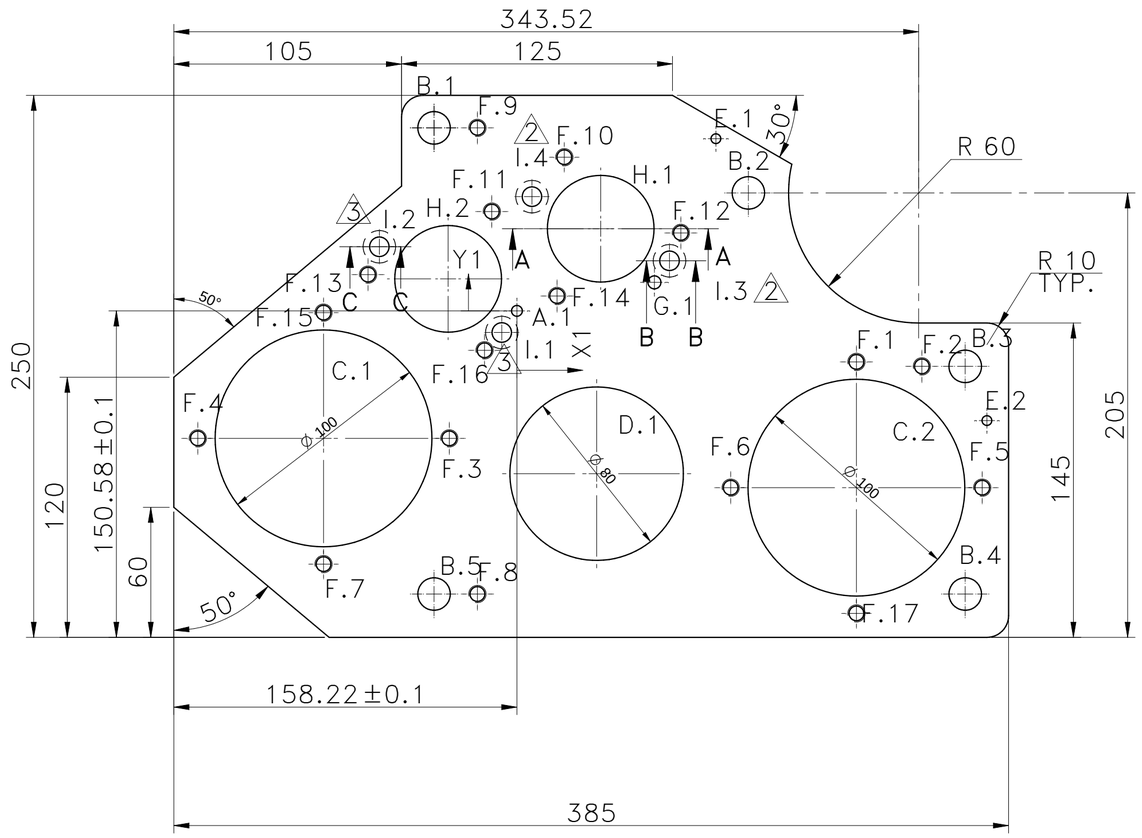


SCALE/ÉCHELLE 1:2

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.


NOTE :–(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

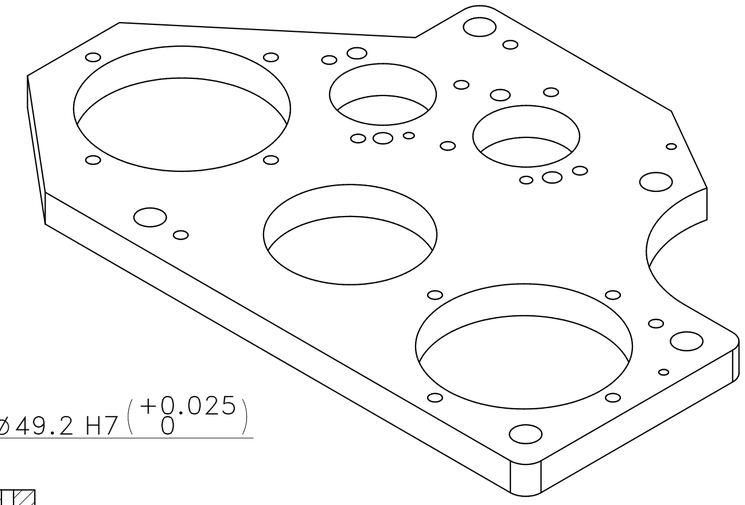


SCALE/ÉCHELLE 1:2



SECTION A–A
SCALE/ÉCHELLE 1:2

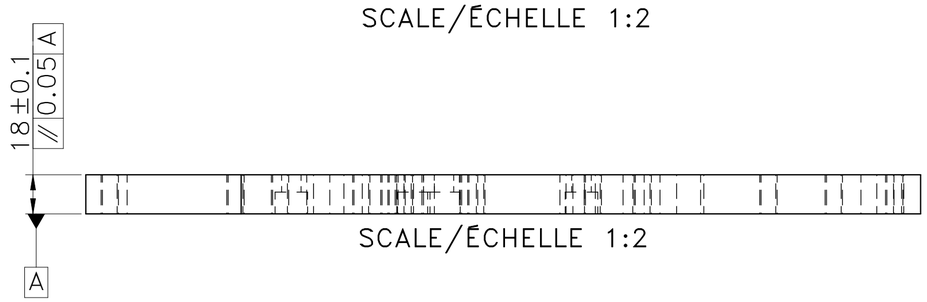

SCALE/ÉCHELLE 1:2

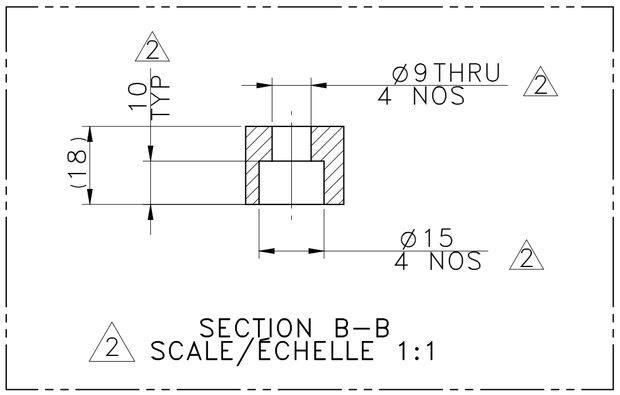

2 SECTION B–B
SCALE/ÉCHELLE 1:1

NOTE : USE THREADED INSERTS FOR ALL TAPPING HOLE.

NOTE : (English)
MATERIAL: AL HE30
FINISH: SELF–ANODISE
MACHINING:
WEIGHT(Kg): 2.40 kg

NOTE :–(French)
MATÉRIEL : AL HE30
FINITION : SELF–ANODISE
MACHINES :
POIDS (Kg): 2.40 kg

3	02 NOS Ø5H7 HOLE IS REPLACED BY C'BORE HOLE (REF HOLE TABLE & SEC B-B)	30/09/2024	03006598
2	02 NOS Ø5H7 (A3&A4) HOLE IS REPLACED BY COUTER HOLE (REF HOLE TABLE & SEC B-B)	30/09/2024	03006751
1	HOLE TABLE ZERO REFERENCE CHANGED	21.03.2024	9255
REVISION	DESCRIPTION	DATE	DRN.BY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: **SCREW PLATE**

DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
235.68 in^2	#	#	WPP	0100	PL-02	A2

REFERENCE DWG. P2207012117021 | PART CLASS. B | HEAT TREATMENT ---

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006517	03004785	03002882	#	P23Y5B154276	03	1 : 2
30/10/2024	30/10/2024	30/10/2024	NET WEIGHT-Kg 2.40 kg			SHEET 1 OF 2

RESERVED SPACE FOR CONTROLLED COPY STAMP

CONTROLLED COPY

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

\\srv01102\ExDM Uploading\2022-23\P23Y5\P23Y5B154276.dft

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 PFR-DES-07-REV-05

HOLE TABLE

Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 5.00 mm THRU'	H7
B.1	−38.22	84.42	Ø 15.00 mm THRU'	
B.2	106.78	54.42	Ø 15.00 mm THRU'	
B.3	206.78	−25.58	Ø 15.00 mm THRU'	
B.4	206.78	−130.58	Ø 15.00 mm THRU'	
B.5	−38.22	−130.58	Ø 15.00 mm THRU'	
C.1	−89.19	−58.79		
C.2	156.61	−81.52		
D.1	36.78	−75.08		
E.1	91.78	79.42	Ø 4.50 mm THRU'	
E.2	216.78	−50.58	Ø 4.50 mm THRU'	
F.1	156.61	−23.52	M8 THRU'	
F.10	21.87	70.88	M8 THRU'	
F.11	−11.57	45.82	M8 THRU'	
F.12	75.62	35.97	M8 THRU'	
F.13	−68.67	16.73	M8 THRU'	
F.14	18.52	6.88	M8 THRU'	
F.15	−89.19	−0.79	M8 THRU'	
F.16	−14.92	−18.18	M8 THRU'	
F.17	156.61	−139.52	M8 THRU'	
F.2	186.78	−25.58	M8 THRU'	
F.3	−31.19	−58.79	M8 THRU'	
F.4	−147.19	−58.79	M8 THRU'	

HOLE TABLE

Hole	X	Y	Size	REMARK
F.5	214.61	−81.52	M8 THRU'	
F.6	98.61	−81.52	M8 THRU'	
F.7	−89.19	−116.79	M8 THRU'	
F.8	−18.22	−130.58	M8 THRU'	
F.9	−18.22	84.42	M8 THRU'	
G.1	63.42	13.16	Ø 6.00 mm THRU'	
H.1	38.67	37.91		REFER SEC A−A
H.2	−31.72	14.79		REFER SEC A−A
△3 I.1	−6.97	−9.96	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm − 10.00 mm DEEP	REF SEC B−B
△3 I.2	−63.44	29.58	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm − 10.00 mm DEEP	REF SEC B−B
I.3	70.39	23.12	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm − 10.00 mm DEEP	REF SEC B−B
I.4	6.95	52.70	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm − 10.00 mm DEEP	REF SEC B−B

TOLERANCE NOTE :−
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN±0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D. SHOULD BE CONTROLLED WITHIN ±0.2.

NOTE : (English)
MATERIAL: AL HE30
FINISH: SELF−ANODISE
MACHINING: 3.2
WEIGHT(Kg): 2.40 kg

NOTE :−(French)
MATERIEL : AL HE30
FINITION : SELF−ANODISE
MACHINES : 3.2
POIDS (Kg): 2.40 kg

RESERVED SPACE FOR CONTROLLED COPY

CONTROLLED COPY

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

△3	02 NOS Ø5H7 HOLE IS REPLACED BY C'BORE HOLE (REF HOLE TABLE & SEC B-B)	30/09/2024	03006598
△2	02 NOS Ø5H7 (A3&A4) HOLE IS REPLACED BY COUTER HOLE (REF HOLE TABLE & SEC B-B)	30/09/2024	03006751
△1	HOLE TABLE ZERO REFERENCE CHANGED	21.03.2024	9255
REVISION	DESCRIPTION	DATE	DRN.BY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: **SCREW PLATE**

DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
235.68 in^2	#	#	WPP	0100	PL-02	A2

REFERENCE DWG. P2207012117021 | PART CLASS. B | HEAT TREATMENT ---

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006517	03004785	03002882	#	P23Y5B154276	03	1 : 2
30/10/2024	30/10/2024	30/10/2024	NET WEIGHT-Kg 2.40 kg			SHEET 2 OF 2

\\srv01102\ExDM Uploading\2022-23\P23Y5\P23Y5B154276.dft