

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

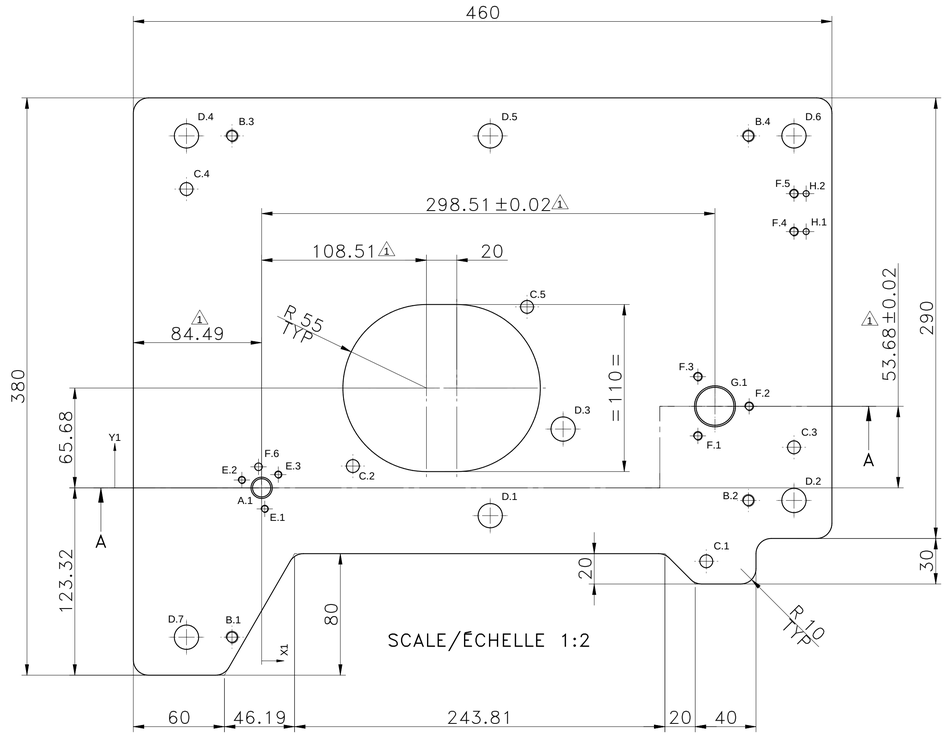


SCALE/ÉCHELLE 1:2

HOLE TABLE 1				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 12.00 mm THRU'	REFER SEC A–A
B.1	−19.49	−98.32	M8 THRU'	
B.2	320.51	−8.32	M8 THRU'	
B.3	−19.49	231.68	M8 THRU'	
B.4	320.51	231.68	M8 THRU'	
C.1	292.79	−48.34	Ø 8.50 mm THRU'	
C.2	60.08	14.32	Ø 8.50 mm THRU'	
C.3	350.51	26.68	Ø 8.50 mm THRU'	
C.4	−49.49	196.68	Ø 8.50 mm THRU'	
1 C.5	174.76	119.10	Ø 8.50 mm THRU'	
D.1	150.51	−18.32	Ø 16.00 mm THRU'	
D.2	350.51	−8.32	Ø 16.00 mm THRU'	
D.3	198.51	38.68	Ø 16.00 mm THRU'	
D.4	−49.49	231.68	Ø 16.00 mm THRU'	
D.5	150.51	231.68	Ø 16.00 mm THRU'	
D.6	350.51	231.68	Ø 16.00 mm THRU'	
1 D.7	−49.49	−98.32	Ø 16.00 mm THRU'	
E.1	2.06	−13.85	M5 THRU'	
E.2	−13.02	5.14	M5 THRU'	
E.3	10.96	8.71	M5 THRU'	
F.1	287.26	34.19	M6 THRU'	
F.2	321.01	53.68	M6 THRU'	
F.3	287.26	73.17	M6 THRU'	
F.4	350.51	168.68	M6 THRU'	
F.5	350.51	193.68	M6 THRU'	
1 F.6	−2.06	13.85	Ø 5.00 mm THRU'	H7
G.1	298.51	53.68	Ø 25.00 mm THRU'	REFER SEC A–A
H.1	358.51	168.68	Ø 4.00 mm THRU'	H7
H.2	358.51	193.68	Ø 4.00 mm THRU'	H7

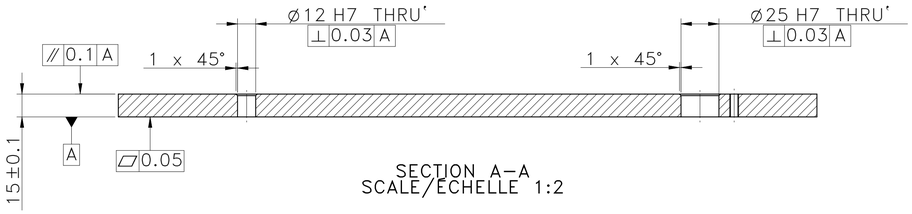

SECTION A–A
SCALE/ÉCHELLE 1:2

TOLERANCE NOTE :-
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN±0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN ±0.2.

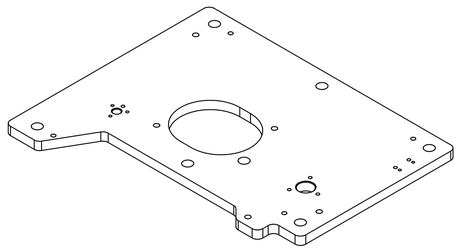

SCALE/ÉCHELLE 1:4

NOTE:
1)USE HELICOIL INSERT AT ALL TAPPING HOLES

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

NOTE : (English)
MATERIAL: Aluminum, 7075–T6
FINISH: SELF–ANODIZING
MACHINING: 3.2
WEIGHT(Kg): 5.48 kg

NOTE :–(French)
MATÉRIEL : Aluminum, 7075–T6
FINITION : SELF–ANODIZING
MACHINES : 3.2
POIDS (Kg): 5.48 kg

RESERVED SPACE FOR
CONTROLLED COPY

REVISION	DESCRIPTION	DATE	DRN.BY
2	HOLE MISSING ADDED. (SOFTWARE ISSUE REF PDF 00)	24/04/2024	03006751
1	HOLE DIMENSION SHIFTED	21.03.2024	9255

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

wipro PARI www.wipropari.com	WIPRO PARI GROUP						DRAWING TYPE	
1.ALL DIMENSIONS ARE IN mm	DESCRIPTION: BOTTOM PLATE						MACHINING	
2.DO NOT SCALE DRAWING.	SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE	
3.IF IN DOUBT , ASK TEAM MEMBER	472.07 in^2	#	#	WPES	0300	PL-02	A1	
LOCATION : PUNE	REFERENCE DWG. P2207012112021		PART CLASS. B	HEAT TREATMENT ---				
© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED	DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE	
	03006751	03004785	03002882	#	P23Y5B154307	02	1 : 1	
	24/04/2024	24/04/2024	24/04/2024	NET WEIGHT-Kg 5.48 kg			SHEET 1 OF 1	

\\srv01102\E:\DM Uploading\2022-23\P23Y5\P23Y5B154307.drf