


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 PFR-DES-07-REV-05

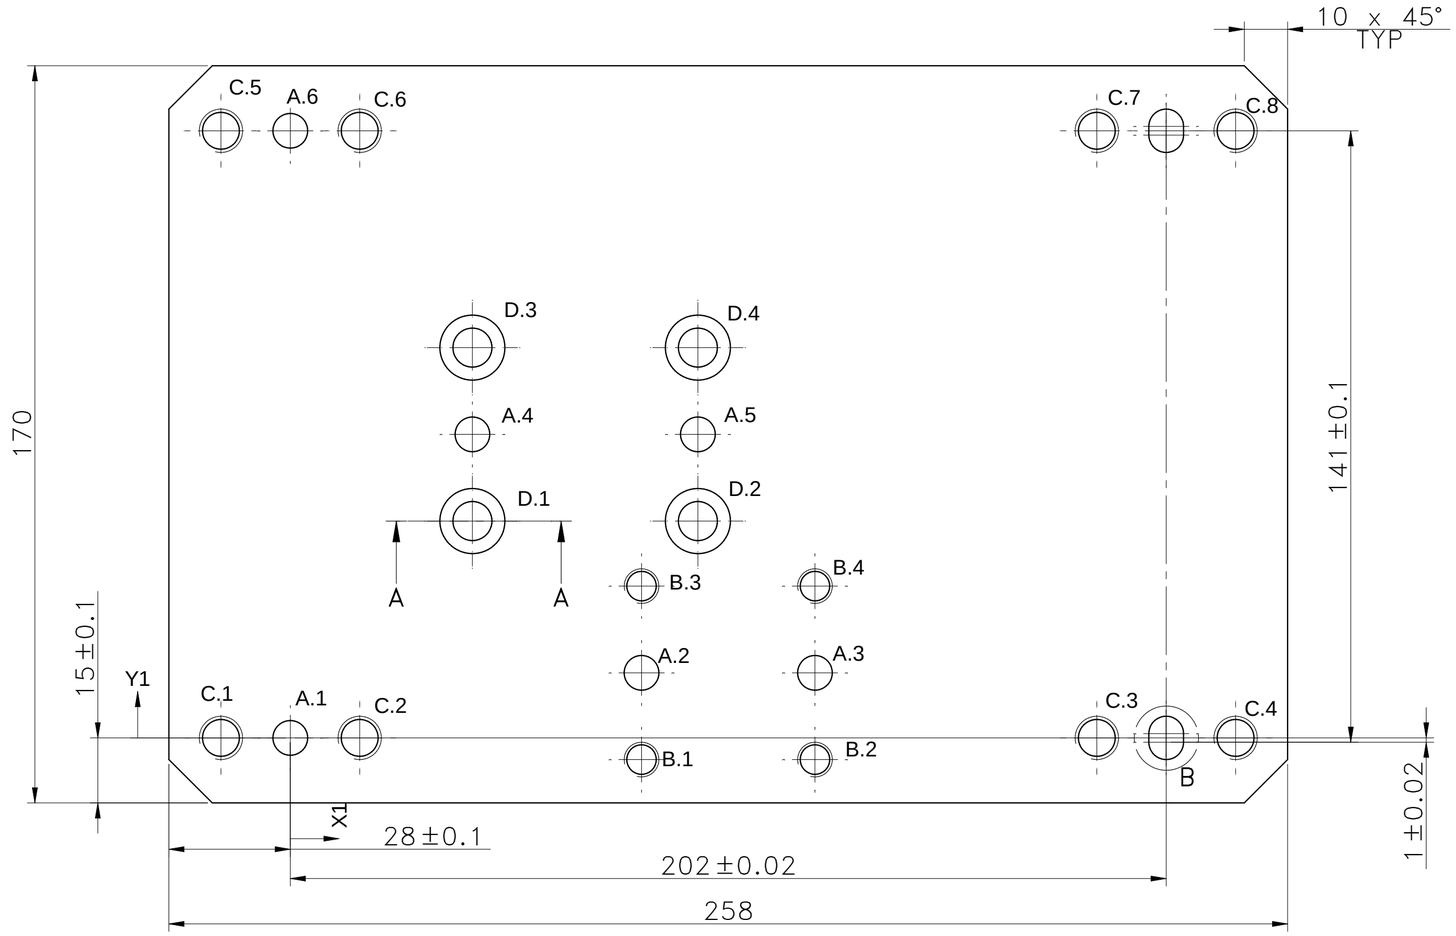


SCALE/ÉCHELLE 1:1




SECTION A–A
SCALE/ÉCHELLE 1:1

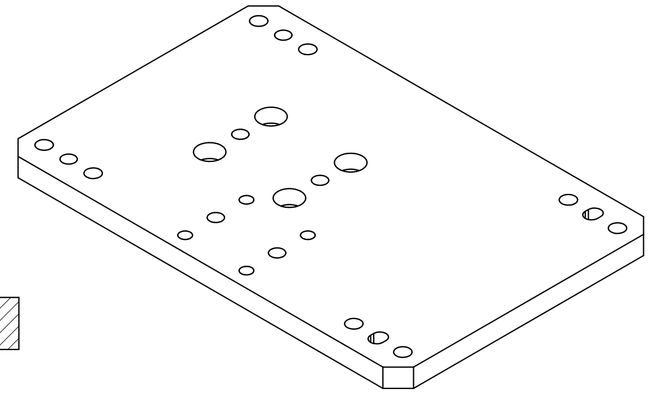

SCALE/ÉCHELLE 1:2

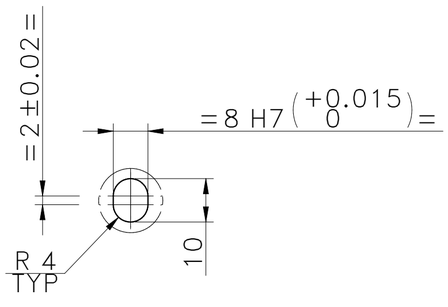

DETAIL B
SCALE/ÉCHELLE 1:1

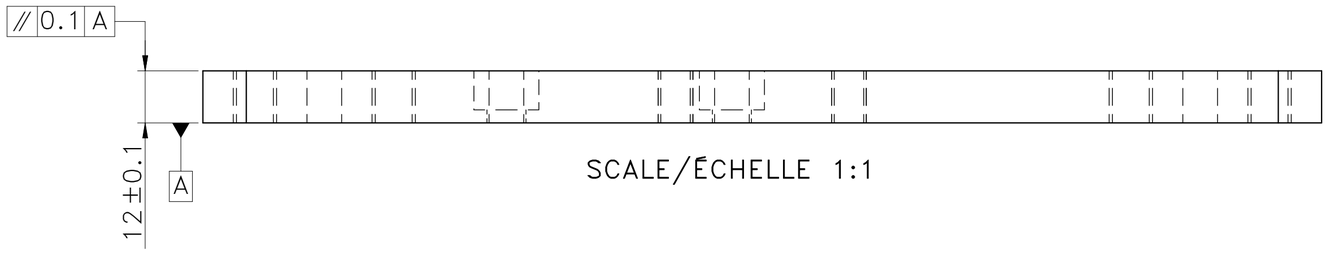

SCALE/ÉCHELLE 1:1

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
ÉBAVUREZ TOUS LES TROUS
NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

NOTE : (English)
MATERIAL: M.S.
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2
WEIGHT(Kg): 3.95 kg

NOTE :–(French)
MATÉRIEL : M.S.
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2
POIDS (Kg): 3.95 kg

RESERVED SPACE FOR
CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

wipro PARI
www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: **CONNECTION PLATE**

DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
159.45 in^2	#	#	WPES	0300	PL-02	A2

REFERENCE DWG. --- | PART CLASS. B | HEAT TREATMENT ---

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
01009374	03004785	03002882	#	P23Y5B154401	00	1 : 1
07/03/2024	07/03/2024	07/03/2024	NET WEIGHT-Kg 3.95 kg			SHEET 1 OF 2

\\srv01102\E:\DM Uploading\2022-23\P23Y5\P23Y5B154401.dft

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 PFR-DES-07-REV-05

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 8.00 mm THRU'	H7
A.2	81.00	15.00	Ø 8.00 mm THRU'	H7
A.3	121.00	15.00	Ø 8.00 mm THRU'	H7
A.4	42.00	70.00	Ø 8.00 mm THRU'	H7
A.5	94.00	70.00	Ø 8.00 mm THRU'	H7
A.6	0.00	140.00	Ø 8.00 mm THRU'	H7
B.1	81.00	−5.00	M8 THRU'	
B.2	121.00	−5.00	M8 THRU'	
B.3	81.00	35.00	M8 THRU'	
B.4	121.00	35.00	M8 THRU'	
C.1	−16.00	0.00	M10 THRU'	
C.2	16.00	0.00	M10 THRU'	
C.3	186.00	0.00	M10 THRU'	
C.4	218.00	0.00	M10 THRU'	
C.5	−16.00	140.00	M10 THRU'	
C.6	16.00	140.00	M10 THRU'	
C.7	186.00	140.00	M10 THRU'	
C.8	218.00	140.00	M10 THRU'	
D.1	42.00	50.00	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm − 9.00 mm DEEP	REFER SECTION A−A

HOLE TABLE				
Hole	X	Y	Size	REMARK
D.2	94.00	50.00	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm − 9.00 mm DEEP	REFER SECTION A−A
D.3	42.00	90.00	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm − 9.00 mm DEEP	REFER SECTION A−A
D.4	94.00	90.00	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm − 9.00 mm DEEP	REFER SECTION A−A

TOLERANCE NOTE :-
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN±0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D, SHOULD BE CONTROLLED WITHIN ±0.2.

NOTE : (English)
MATERIAL: M.S.
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2
WEIGHT(Kg): 3.95 kg

NOTE :−(French)
MATERIEL : M.S.
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2
POIDS (Kg): 3.95 kg

RESERVED SPACE FOR CONTROLLED COPY STAMP

CONTROLLED COPY

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

wipro PARI
www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: **CONNECTION PLATE**
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
159.45 in^2	#	#	WPES	0300	PL-02	A2

REFERENCE DWG. --- PART CLASS. B HEAT TREATMENT ---

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
01009374	03004785	03002882	#	P23Y5B154401	00	1 : 1
07/03/2024	07/03/2024	07/03/2024	NET WEIGHT-Kg 3.95 kg			SHEET 2 OF 2

\\srv01102\ExDM Uploading\2022-23\P23Y5\P23Y5B154401.dft