


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 PFR-DES-07-REV-05

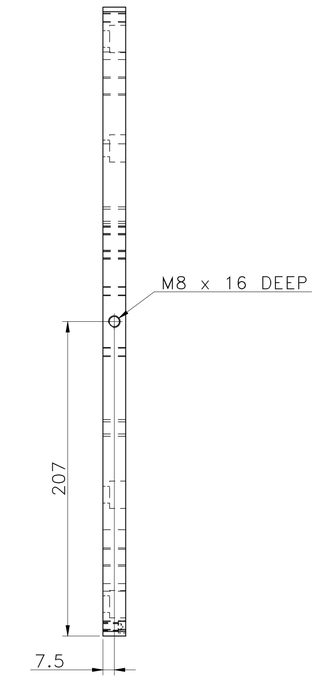


SCALE/ÉCHELLE 1:2

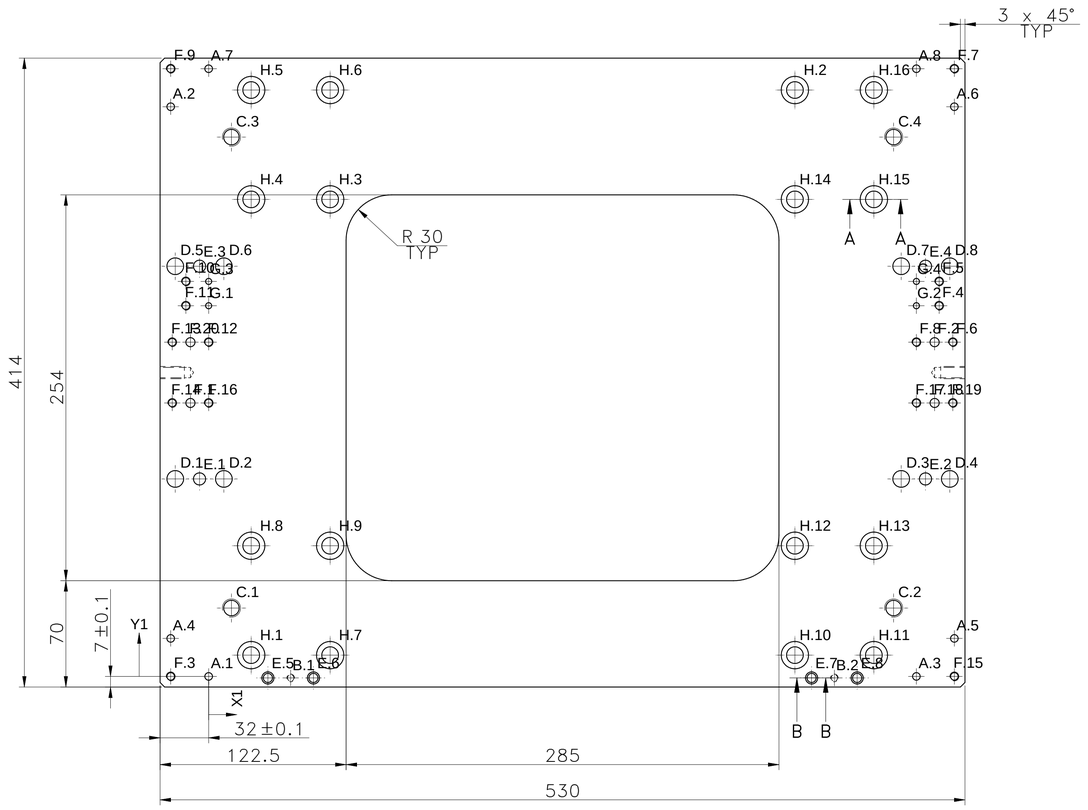


SCALE/ÉCHELLE 1:2

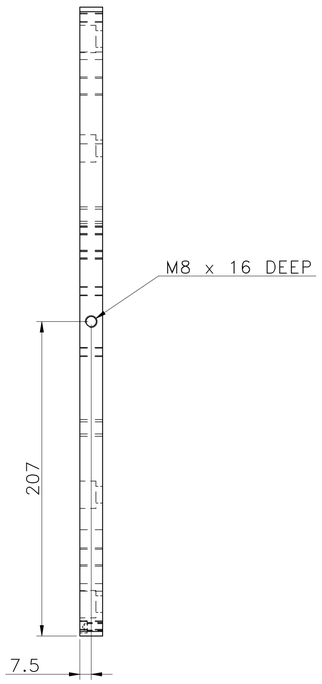


SCALE/ÉCHELLE 1:2

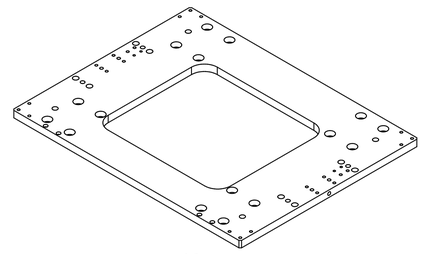

SCALE/ÉCHELLE 1:5



SECTION A–A
SCALE/ÉCHELLE 1:1



SECTION B–B
SCALE/ÉCHELLE 1:1



SCALE/ÉCHELLE 1:2

NOTE – USE THRAEDED INSERT AT ALL TAPPING HOLE

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
EBAVUREZ TOUS LES TROUS
NON SPECIFIES ET LES BORDS TRANCHANTS.

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A

NOTE : (English)
MATERIAL: Aluminum, 7075–T6
FINISH: SELF–ANODIZING
MACHINING:
WEIGHT(Kg): 5.96 kg

NOTE :–(French)
MATERIEL : Aluminum, 7075–T6
FINITION : SELF–ANODIZING
MACHINES :
POIDS (Kg): 5.96 kg

RESERVED SPACE FOR STAMP

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm	
UP TO 10	±1'
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

WIPRO PARI GROUP

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

DESCRIPTION: **MOVING PLATE**

DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
560.56 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. --- PART CLASS. B HEAT TREATMENT ---

LOCATION : PUNE

DRN.BY	CHKD.BY	APPD.BY	MATERIAL
01009374	03004785	03002882	#
07/03/2024	07/03/2024	07/03/2024	NET WEIGHT-Kg 5.96 kg

DRG./PART CODE: **P23Y5B154402**

REV.: **00**

SCALE: 1 : 2

SHEET 1 OF 2

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01102\E:\DM Uploading\2022--23\P23Y5\P23Y5B154402.dft

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 PFR-DES-07-REV-05

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 5.00 mm THRU'	H7
A.2	−25.00	375.00	Ø 5.00 mm THRU'	H7
A.3	466.00	0.00	Ø 5.00 mm THRU'	H7
A.4	−25.00	25.00	Ø 5.00 mm THRU'	H7
A.5	491.00	25.00	Ø 5.00 mm THRU'	H7
A.6	491.00	375.00	Ø 5.00 mm THRU'	H7
A.7	0.00	400.00	Ø 5.00 mm THRU'	H7
A.8	466.00	400.00	Ø 5.00 mm THRU'	H7
B.1	54.00	−1.00	M5 x 10.00 mm DEEP	FROM BACK SIDE
B.2	412.00	−1.00	M5 x 10.00 mm DEEP	FROM BACK SIDE
C.1	15.00	45.00	M12 THRU'	
C.2	451.00	45.00	M12 THRU'	
C.3	15.00	355.00	M12 THRU'	
C.4	451.00	355.00	M12 THRU'	
D.1	−22.00	130.00	Ø 11.00 mm THRU'	
D.2	10.00	130.00	Ø 11.00 mm THRU'	
D.3	456.00	130.00	Ø 11.00 mm THRU'	
D.4	488.00	130.00	Ø 11.00 mm THRU'	
D.5	−22.00	270.00	Ø 11.00 mm THRU'	
D.6	10.00	270.00	Ø 11.00 mm THRU'	
D.7	456.00	270.00	Ø 11.00 mm THRU'	
D.8	488.00	270.00	Ø 11.00 mm THRU'	
E.1	−6.00	130.00	Ø 8.00 mm THRU'	H7
E.2	472.00	130.00	Ø 8.00 mm THRU'	H7
E.3	−6.00	270.00	Ø 8.00 mm THRU'	H7
E.4	472.00	270.00	Ø 8.00 mm THRU'	H7
E.5	39.00	−1.00	Ø 6.00 mm THRU' C'BORE Ø 8.00 mm − 4.80 mm DEEP	H7 REFER SECTION B−B
E.6	69.00	−1.00	Ø 6.00 mm THRU' C'BORE Ø 8.00 mm − 4.80 mm DEEP	H7 REFER SECTION B−B
E.7	397.00	−1.00	Ø 6.00 mm THRU' C'BORE Ø 8.00 mm − 4.80 mm DEEP	H7 REFER SECTION B−B
E.8	427.00	−1.00	Ø 6.00 mm THRU' C'BORE Ø 8.00 mm − 4.80 mm DEEP	H7 REFER SECTION B−B
F.1	−12.00	180.00	Ø 6.00 mm THRU'	H7
F.10	−15.00	260.00	M6 THRU'	
F.11	−15.00	244.00	M6 THRU'	
F.12	0.00	220.00	M6 THRU'	

HOLE TABLE				
Hole	X	Y	Size	REMARK
F.13	−24.00	220.00	M6 THRU'	
F.14	−24.00	180.00	M6 THRU'	
F.15	491.00	0.00	M6 THRU'	
F.16	0.00	180.00	M6 THRU'	
F.17	466.00	180.00	M6 THRU'	
F.18	478.00	180.00	Ø 6.00 mm THRU'	H7
F.19	490.00	180.00	M6 THRU'	
F.2	478.00	220.00	Ø 6.00 mm THRU'	H7
F.20	−12.00	220.00	Ø 6.00 mm THRU'	H7
F.3	−25.00	0.00	M6 THRU'	
F.4	481.00	244.00	M6 THRU'	
F.5	481.00	260.00	M6 THRU'	
F.6	490.00	220.00	M6 THRU'	
F.7	491.00	400.00	M6 THRU'	
F.8	466.00	220.00	M6 THRU'	
F.9	−25.00	400.00	M6 THRU'	
G.1	0.00	244.00	Ø 4.00 mm THRU'	H7
G.2	466.00	244.00	Ø 4.00 mm THRU'	H7
G.3	0.00	260.00	Ø 4.00 mm THRU'	H7
G.4	466.00	260.00	Ø 4.00 mm THRU'	H7
H.1	28.00	14.00	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm − 10.60 mm DEEP	REFER SECTION A−A
H.10	386.00	14.00	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm − 10.60 mm DEEP	REFER SECTION A−A
H.11	438.00	14.00	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm − 10.60 mm DEEP	REFER SECTION A−A
H.12	386.00	86.00	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm − 10.60 mm DEEP	REFER SECTION A−A
H.13	438.00	86.00	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm − 10.60 mm DEEP	REFER SECTION A−A

HOLE TABLE				
Hole	X	Y	Size	REMARK
H.14	386.00	314.00	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm − 10.60 mm DEEP	REFER SECTION A−A
H.15	438.00	314.00	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm − 10.60 mm DEEP	REFER SECTION A−A
H.16	438.00	386.00	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm − 10.60 mm DEEP	REFER SECTION A−A
H.2	386.00	386.00	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm − 10.60 mm DEEP	REFER SECTION A−A
H.3	80.00	314.00	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm − 10.60 mm DEEP	REFER SECTION A−A
H.4	28.00	314.00	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm − 10.60 mm DEEP	REFER SECTION A−A
H.5	28.00	386.00	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm − 10.60 mm DEEP	REFER SECTION A−A
H.6	80.00	386.00	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm − 10.60 mm DEEP	REFER SECTION A−A
H.7	80.00	14.00	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm − 10.60 mm DEEP	REFER SECTION A−A
H.8	28.00	86.00	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm − 10.60 mm DEEP	REFER SECTION A−A
H.9	80.00	86.00	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm − 10.60 mm DEEP	REFER SECTION A−A

TOLERANCE NOTE :-
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN±0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D, SHOULD BE CONTROLLED WITHIN ±0.2.

NOTE : (English)
MATERIAL: Aluminum, 7075−T6
FINISH: SELF−ANODIZING
MACHINING: 3.2
WEIGHT(Kg): 5.96 kg

NOTE :−(French)
MATERIEL : Aluminum, 7075−T6
FINITION : SELF−ANODIZING
MACHINES : 3.2
POIDS (Kg): 5.96 kg

RESERVED SPACE FOR CONTROLLED COPY

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

www.wipropari.com
1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

WIPRO PARI GROUP

DESCRIPTION: **MOVING PLATE**

DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
560.56 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. --- | PART CLASS. B | HEAT TREATMENT ---

LOCATION : PUNE

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
01009374	03004785	03002882	#	P23Y5B154402	00	1 : 2
07/03/2024	07/03/2024	07/03/2024	NET WEIGHT-Kg 5.96 kg			SHEET 2 OF 2

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\arv01102\Vault Uploading\2022-23\P2375\P23Y5B154402.dft