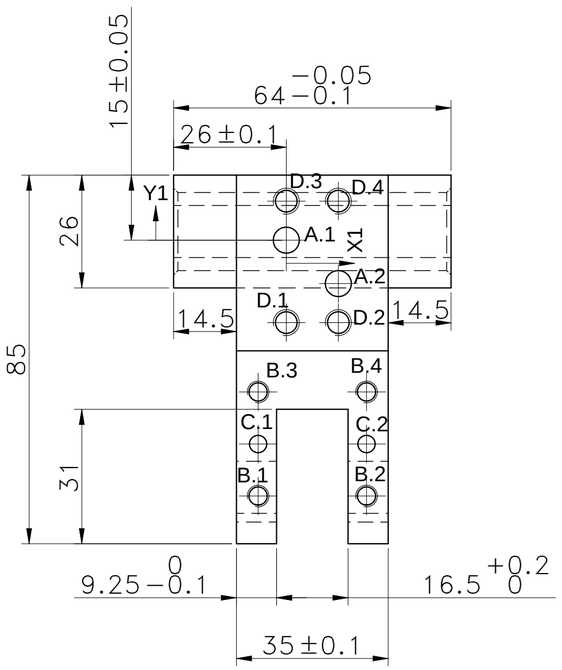
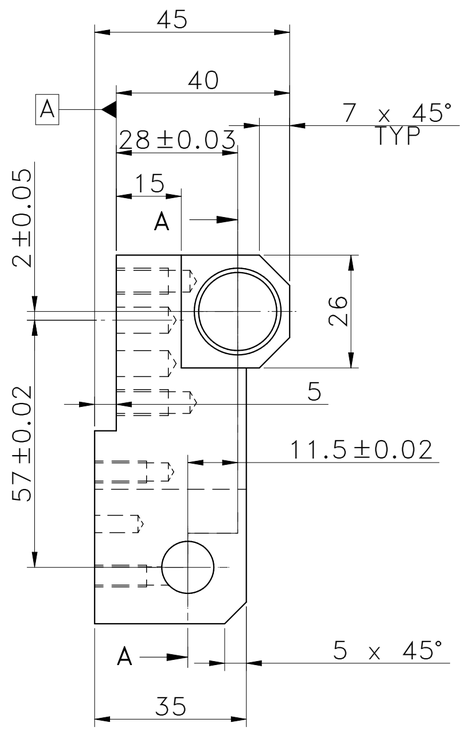
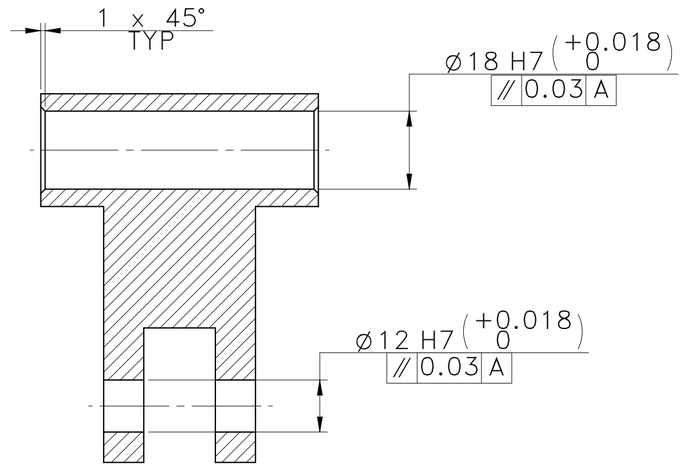
NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00



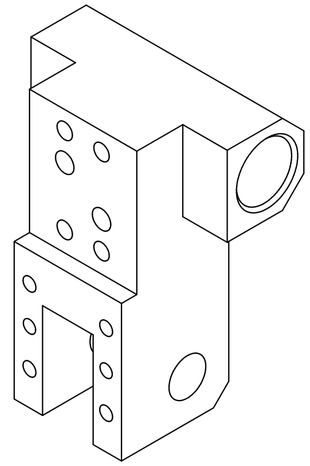

SCALE/ÉCHELLE 1:1




SCALE/ÉCHELLE 1:1




SECTION A−A
SCALE/ÉCHELLE 1:1



SCALE/ÉCHELLE 1:1

HEAT TREATMENT :−
1) TO BE TOUGHENED UPTO 24−32 HRC.
2) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.( IF APPLICABLE )

NOTE :−(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :−(French)
ÉBAVUREZ TOUS LES TROUS
NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE : (English)
# MATERIAL: C45
# FINISH: I.Z.B.P. (TRIVALENT)
# MACHINING: 3.2
# WEIGHT(Kg ): 0.64 kg

NOTE :−(French)
# MATÉRIEL : C45
# FINITION : I.Z.B.P. (TRIVALENT)
# MACHINES : 3.2
# POIDS (Kg): 0.64 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

RESERVED SPACE FOR CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

| UNSP.RADII | UNSP.CHF. |
|---|---|
| 0.5 R | 0.5 X 45° |

| UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm. | |
|---|---|
| UP TO 10 | ±1.5° |
| 10 UP TO 50 | ±0°50' |
| 50 UP TO 120 | ±0°25' |
| 120 UP TO 400 | ±0°15' |

| UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm. | |
|---|---|
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.2 |
| 6 UP TO 30 | ±0.5 |
| 30 UP TO 120 | ±0.8 |
| 120 UP TO 315 | ±1.2 |
| 315 UP TO 1000 | ±2 |
| 1000 UP TO 2000 | ±3 |
| OVER 2000 | ±4 |

| UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm. | |
|---|---|
| UP TO 10 | ±1° |
| 10 UP TO 50 | ±0°30' |
| 50 UP TO 120 | ±0°20' |
| 120 UP TO 400 | ±0°10' |

| UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm. | |
|---|---|
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.1 |
| 6 UP TO 30 | ±0.2 |
| 30 UP TO 120 | ±0.3 |
| 120 UP TO 315 | ±0.5 |
| 315 UP TO 1000 | ±0.8 |
| 1000 UP TO 2000 | ±1.2 |
| OVER 2000 | ±2 |
| LIMITS | |
| Gen Tol.: IS 2102 | |

| REVISION | DESCRIPTION | DATE | DRN.BY |
|---|---|---|---|
| | | | |
| | | | |

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: **PIVOT**

DRAWING TYPE: MACHINING

| SURFACE AREA | SURFACE TREATMENT | MACHINING | DESIGN UNIT | DESIGN UNIT CD. | TEAM NO. | SHEET SIZE |
|---|---|---|---|---|---|---|
| 37.90 in^2 | # | # | WPES | 0300 | PL-02 | A2 |

REFERENCE DWG. -- | PART CLASS. B | HEAT TREATMENT | REF NOTE

| DRN.BY | CHKD.BY | APPD.BY | MATERIAL | DRG./PART CODE | REV. | SCALE |
|---|---|---|---|---|---|---|
| 01009374 | 03004785 | 03002882 | # | P23Y5B154433 | 00 | 1 : 1 |
| 08/03/2024 | 08/03/2024 | 08/03/2024 | NET WEIGHT-Kg 0.64 kg | | | SHEET 1 OF 2 |

\\srv01102\ExDM Uploading\2022-23\P23Y5\P23Y5B154433.dft

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

## HOLE TABLE

| Hole | X | Y | Size | REMARK |
|---|---|---|---|---|
| A.1 | 0.00 | 0.00 | Ø 6.00 mm x 12.00 mm DEEP | H7 |
| A.2 | 12.00 | −10.00 | Ø 6.00 mm x 12.00 mm DEEP | H7 |
| B.1 | −6.50 | −59.00 | M5 x 12.00 mm DEEP | |
| B.2 | 18.50 | −59.00 | M5 x 12.00 mm DEEP | |
| B.3 | −6.50 | −35.00 | M5 x 12.00 mm DEEP | |
| B.4 | 18.50 | −35.00 | M5 x 12.00 mm DEEP | |
| C.1 | −6.50 | −47.00 | Ø 4.00 mm x 10.00 mm DEEP | H7 |
| C.2 | 18.50 | −47.00 | Ø 4.00 mm x 10.00 mm DEEP | H7 |
| D.1 | 0.00 | −19.00 | M6 x 12.00 mm DEEP | |
| D.2 | 12.00 | −19.00 | M6 x 12.00 mm DEEP | |
| D.3 | 0.00 | 9.00 | M6 x 12.00 mm DEEP | |
| D.4 | 12.00 | 9.00 | M6 x 12.00 mm DEEP | |

TOLERANCE NOTE :-
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN±0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN ±0.2.

NOTE : (English)
# MATERIAL: C45
# FINISH: I.Z.B.P. (TRIVALENT)
# MACHINING: 3.2
# WEIGHT(Kg ): 0.64 kg

NOTE :−(French)
# MATERIEL : C45
# FINITION : I.Z.B.P. (TRIVALENT)
# MACHINES : 3.2
# POIDS (Kg): 0.64 kg

RESERVED SPACE FOR CONTROLLED COPY

CONTROLLED COPY

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

| UNSP.RADII | UNSP.CHF. |
|---|---|
| 0.5 R | 0.5 X 45° |

| UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm. | |
|---|---|
| UP TO 10 | ±1.5° |
| 10 UP TO 50 | ±0°50' |
| 50 UP TO 120 | ±0°25' |
| 120 UP TO 400 | ±0°15' |

| UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm. | |
|---|---|
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.2 |
| 6 UP TO 30 | ±0.5 |
| 30 UP TO 120 | ±0.8 |
| 120 UP TO 315 | ±1.2 |
| 315 UP TO 1000 | ±2 |
| 1000 UP TO 2000 | ±3 |
| OVER 2000 | ±4 |

| UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm. | |
|---|---|
| UP TO 10 | ±1° |
| 10 UP TO 50 | ±0°30' |
| 50 UP TO 120 | ±0°20' |
| 120 UP TO 400 | ±0°10' |

| UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm. | |
|---|---|
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.1 |
| 6 UP TO 30 | ±0.2 |
| 30 UP TO 120 | ±0.3 |
| 120 UP TO 315 | ±0.5 |
| 315 UP TO 1000 | ±0.8 |
| 1000 UP TO 2000 | ±1.2 |
| OVER 2000 | ±2 |
| LIMITS | |
| Gen Tol.: IS 2102 | |

| REVISION | DESCRIPTION | DATE | DRN.BY |
|---|---|---|---|
| | | | |
| | | | |

wipro PARI
www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: **PIVOT**

DRAWING TYPE: MACHINING

| SURFACE AREA | SURFACE TREATMENT | MACHINING | DESIGN UNIT | DESIGN UNIT CD. | TEAM NO. | SHEET SIZE |
|---|---|---|---|---|---|---|
| 37.90 in^2 | # | # | WPES | 0300 | PL-02 | A2 |

REFERENCE DWG. -- | PART CLASS. B | HEAT TREATMENT | REF NOTE

| DRN.BY | CHKD.BY | APPD.BY | MATERIAL |
|---|---|---|---|
| 01009374 | 03004785 | 03002882 | # |
| 08/03/2024 | 08/03/2024 | 08/03/2024 | NET WEIGHT-Kg 0.64 kg |

DRG./PART CODE: **P23Y5B154433**

REV.: **00**

SCALE: 1 : 1

SHEET: 2 OF 2

\\srv01102\ExDM Uploading\2022-23\P23Y5\P23Y5B154433.dft