

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00



SCALE/ÉCHELLE 1:1

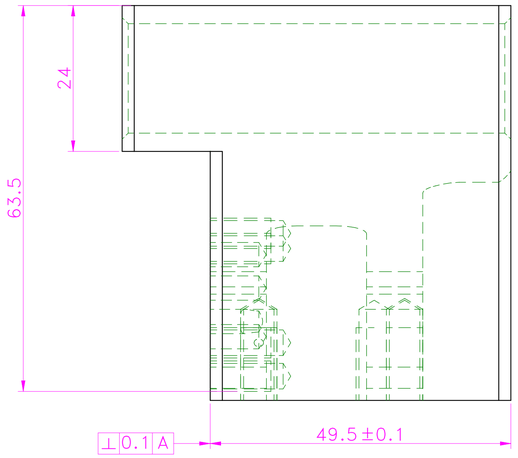


SCALE/ÉCHELLE 2:1


VIEW A HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 4.00 mm x 8.00 mm DEEP	H7
A.2	13.50	−43.50	Ø 4.00 mm x 8.00 mm DEEP	H7
A.3	5.50	−36.50	Ø 4.00 mm x 8.00 mm DEEP	H7
A.4	11.00	−14.00	Ø 4.00 mm x 8.00 mm DEEP	H7
B.1	−1.00	−40.00	M5 x 10.00 mm DEEP	
B.2	20.00	−40.00	M5 x 10.00 mm DEEP	
B.3	−3.50	−7.00	M5 x 10.00 mm DEEP	
B.4	14.50	−7.00	M5 x 10.00 mm DEEP	

FRONT VIEW HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 6.00 mm x 15.00 mm DEEP	H7
A.2	24.00	8.00	Ø 6.00 mm x 15.00 mm DEEP	H7
B.1	0.00	−10.00	M6 x 12.00 mm DEEP	
B.2	19.00	−10.00	M6 x 12.00 mm DEEP	
B.3	0.00	18.00	M6 x 12.00 mm DEEP	
B.4	24.00	18.00	M6 x 12.00 mm DEEP	


TOLERANCE NOTE :
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN±0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D, SHOULD BE CONTROLLED WITHIN ±0.2.

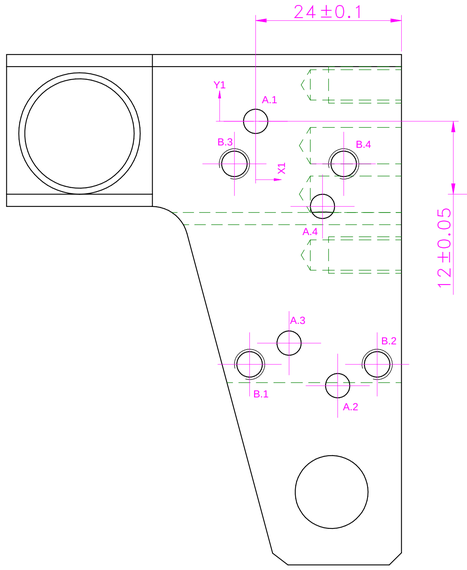


VIEW A
SCALE/ÉCHELLE 2:1

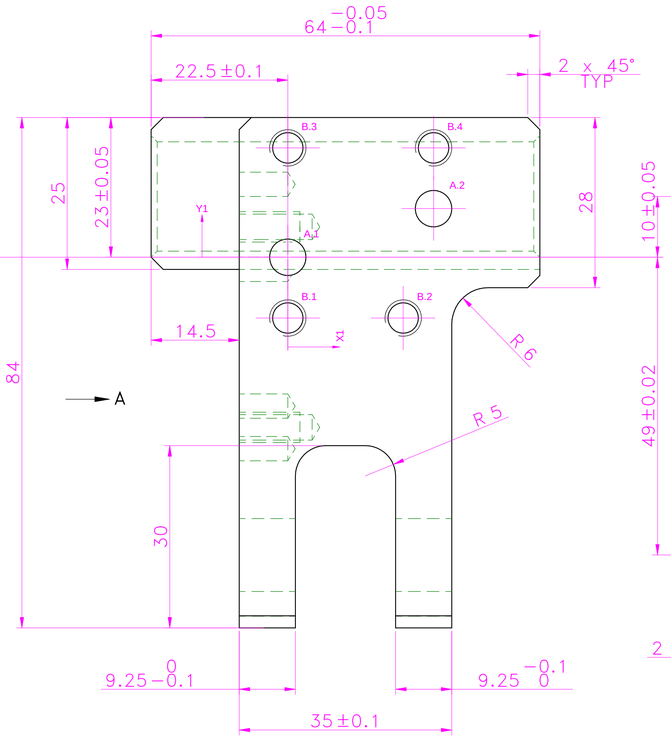

SCALE/ÉCHELLE 2:1

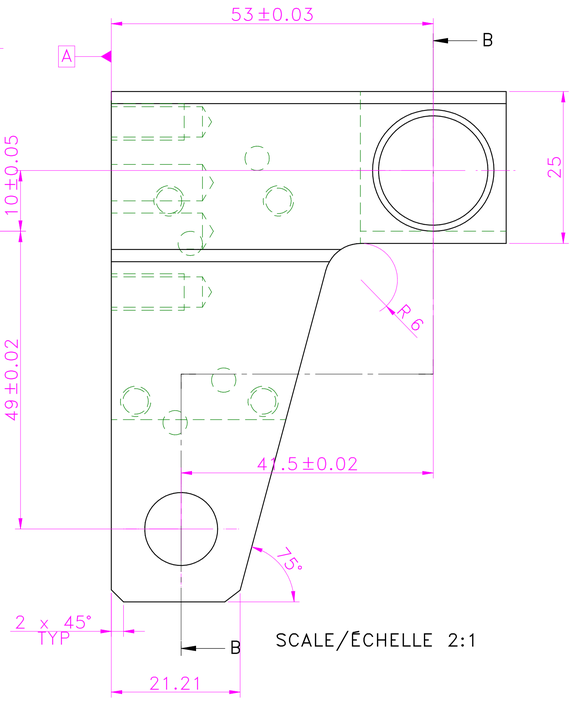

SCALE/ÉCHELLE 2:1

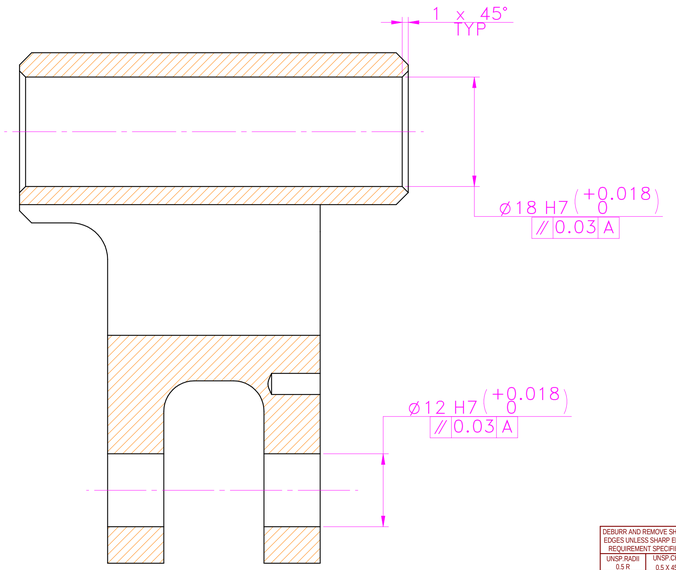

SECTION B−B
SCALE/ÉCHELLE 2:1

NOTE :−(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :−(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

HEAT TREATMENT :−
1) TO BE TOUGHENED UPTO 24−32 HRC.
2) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.(IF APPLICABLE)

NOTE : (English)
MATERIAL: M.S.
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2
WEIGHT(Kg): 0.91 kg

NOTE :−(French)
MATÉRIEL : M.S.
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2
POIDS (Kg): 0.91 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

RESERVED SPACE FOR STAMP

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

wipro PARI
www.wipropari.com

WIPRO PARI GROUP

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT ASK TEAM MEMBER
LOCATION : PUNE

DESCRIPTION: LIVER BLOCK
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO	SHEET SIZE
41.20 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. P220701211604A | PART CLASS. B | HEAT TREATMENT —

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006751	03004785	03002882	#	P23Y5B154445	00	2 : 1
08/03/2024	08/03/2024	08/03/2024	NET WEIGHT-Kg 0.91 kg			SHEET 1 OF 1

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srvd1102\E-eDM Uploading\2022-23\P2375\P2375B154445.dft