

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00




SCALE/ÉCHELLE 1:1

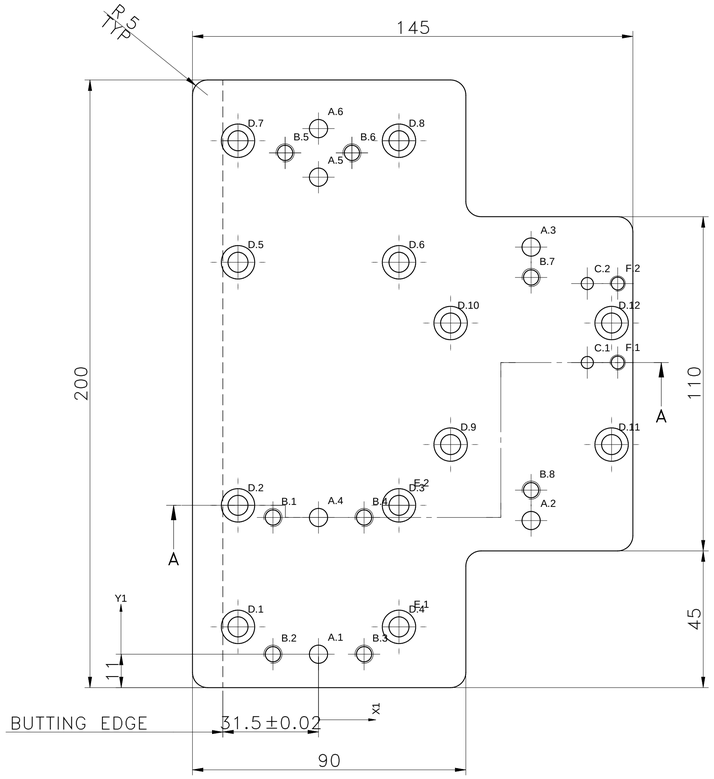


SCALE/ÉCHELLE 1:1




DETAIL B
SCALE/ÉCHELLE 2:1




DETAIL C
SCALE/ÉCHELLE 2:1



DETAIL D
SCALE/ÉCHELLE 2:1

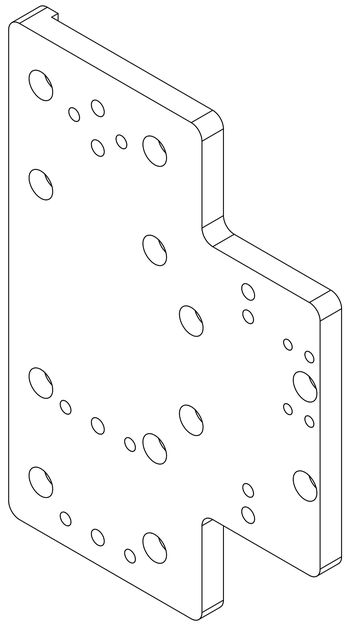

SCALE/ÉCHELLE 1:1

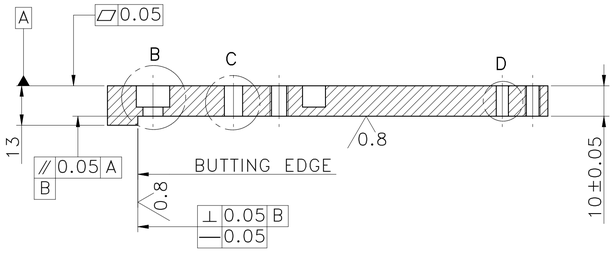

SECTION A–A
SCALE/ÉCHELLE 1:1

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
EBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE : (English)
MATERIAL: M.S.
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2 (0.8)
WEIGHT(Kg): 1.83 kg

NOTE :–(French)
MATÉRIEL : M.S.
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2 (0.8)
POIDS (Kg): 1.83 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

RESERVED SPACE FOR
CONTROLLED COPY

UNSPECIFIED TOL (FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL (FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL (MC) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL (MC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY

WIPRO PARI GROUP
www.wipropari.com

DESCRIPTION: PLATE - 1
DRAWING TYPE: MACHINING

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO	SHEET SIZE
94.56 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. ---- | PART CLASS. B | HEAT TREATMENT ----

LOCATION : PUNE

DRN.BY	CHKD.BY	APPD.BY	MATERIAL #	DRG./PART CODE	REV.	SCALE
3006330	3004785	3002882	NET WEIGHT-Kg 1.83 kg	P23Y5B154509	00	1 : 1
07/03/2024	07/03/2024	07/03/2024				SHEET 1 OF 2

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\sr\r0102\E:\dw Uploading\2022-23\P23Y5\P23Y5B154509.dft

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 6.00 mm THRU'	H7– DETAIL C
A.2	70.00	44.00	Ø 6.00 mm THRU'	H7– DETAIL C
A.3	70.00	134.00	Ø 6.00 mm THRU'	H7– DETAIL C
A.4	0.00	45.00	Ø 6.00 mm THRU'	H7– DETAIL C
A.5	0.00	157.00	Ø 6.00 mm THRU'	H7– DETAIL C
A.6	0.00	173.00	Ø 6.00 mm THRU'	H7– DETAIL C
B.1	–15.00	45.00	M6 THRU'	
B.2	–15.00	0.00	M6 THRU'	
B.3	15.00	0.00	M6 THRU'	
B.4	15.00	45.00	M6 THRU'	
B.5	–11.00	165.00	M6 THRU'	
B.6	11.00	165.00	M6 THRU'	
B.7	70.00	124.00	M6 THRU'	
B.8	70.00	54.00	M6 THRU'	
C.1	88.50	96.00	Ø 4.00 mm THRU'	H7–DETAIL D
C.2	88.50	122.00	Ø 4.00 mm THRU'	H7–DETAIL D
D.1	–26.50	9.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 7.00 mm DEEP	DETAIL B
D.2	–26.50	49.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 7.00 mm DEEP	DETAIL B
D.3	26.50	49.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 7.00 mm DEEP	DETAIL B

HOLE TABLE				
Hole	X	Y	Size	REMARK
D.4	26.50	9.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 7.00 mm DEEP	DETAIL B
D.5	–26.50	129.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 7.00 mm DEEP	DETAIL B
D.6	26.50	129.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 7.00 mm DEEP	DETAIL B
D.7	–26.50	169.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 7.00 mm DEEP	DETAIL B
D.8	26.50	169.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 7.00 mm DEEP	DETAIL B
D.9	43.50	69.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 7.00 mm DEEP	DETAIL B
D.10	43.50	109.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 7.00 mm DEEP	DETAIL B
D.11	96.50	69.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 7.00 mm DEEP	DETAIL B
D.12	96.50	109.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 7.00 mm DEEP	DETAIL B
E.1	26.50	9.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 7.00 mm DEEP	DETAIL B
E.2	26.50	49.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 7.00 mm DEEP	DETAIL B
F.1	98.50	96.00	M5 THRU'	
F.2	98.50	122.00	M5 THRU'	

TOLERANCE NOTE :-
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN±0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN ±0.2.

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

NOTE : (English)
MATERIAL: M.S.
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING:
WEIGHT(Kg): 1.83 kg

NOTE :-(French)
MATERIEL : M.S.
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES :
POIDS (Kg): 1.83 kg

RESERVED SPACE FOR STAMP

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

www.wipropari.com
1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: PLATE - 1

DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
94.56 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. --- PART CLASS. B HEAT TREATMENT ****

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
3006330	3004785	3002882	#	P23Y5B154509	00	1 : 1
07/03/2024	07/03/2024	07/03/2024	NET WEIGHT-Kg 1.83 kg			SHEET 2 OF 2

\\srv0110\ExDW Uploading\2022--23\P23Y5\P23Y5B154509.dft