NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

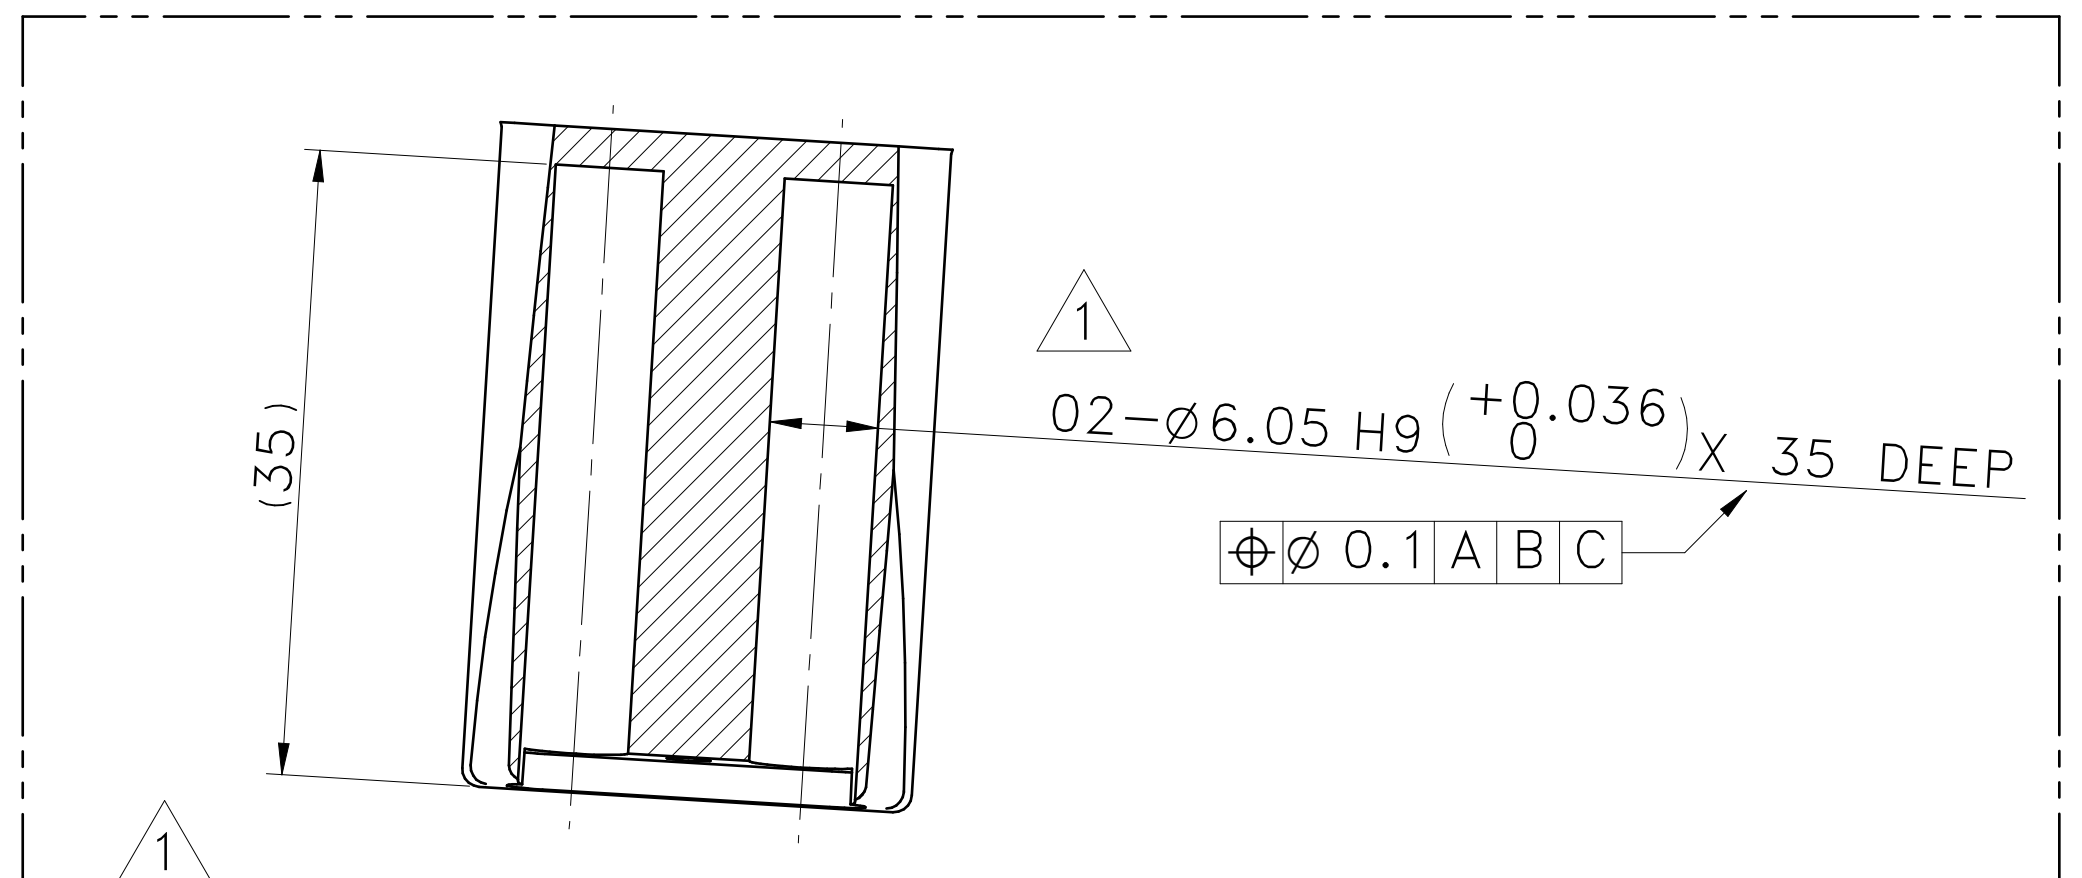
(35)
1
02−Ø6.05 H9 (+0.036 / 0) X 35 DEEP
⊕ Ø 0.1 A B C
1

SECTION F−F
VIEW WITH ORIENTATION SHIFTED BY 3.5°
SCALE/ÉCHELLE 2:1

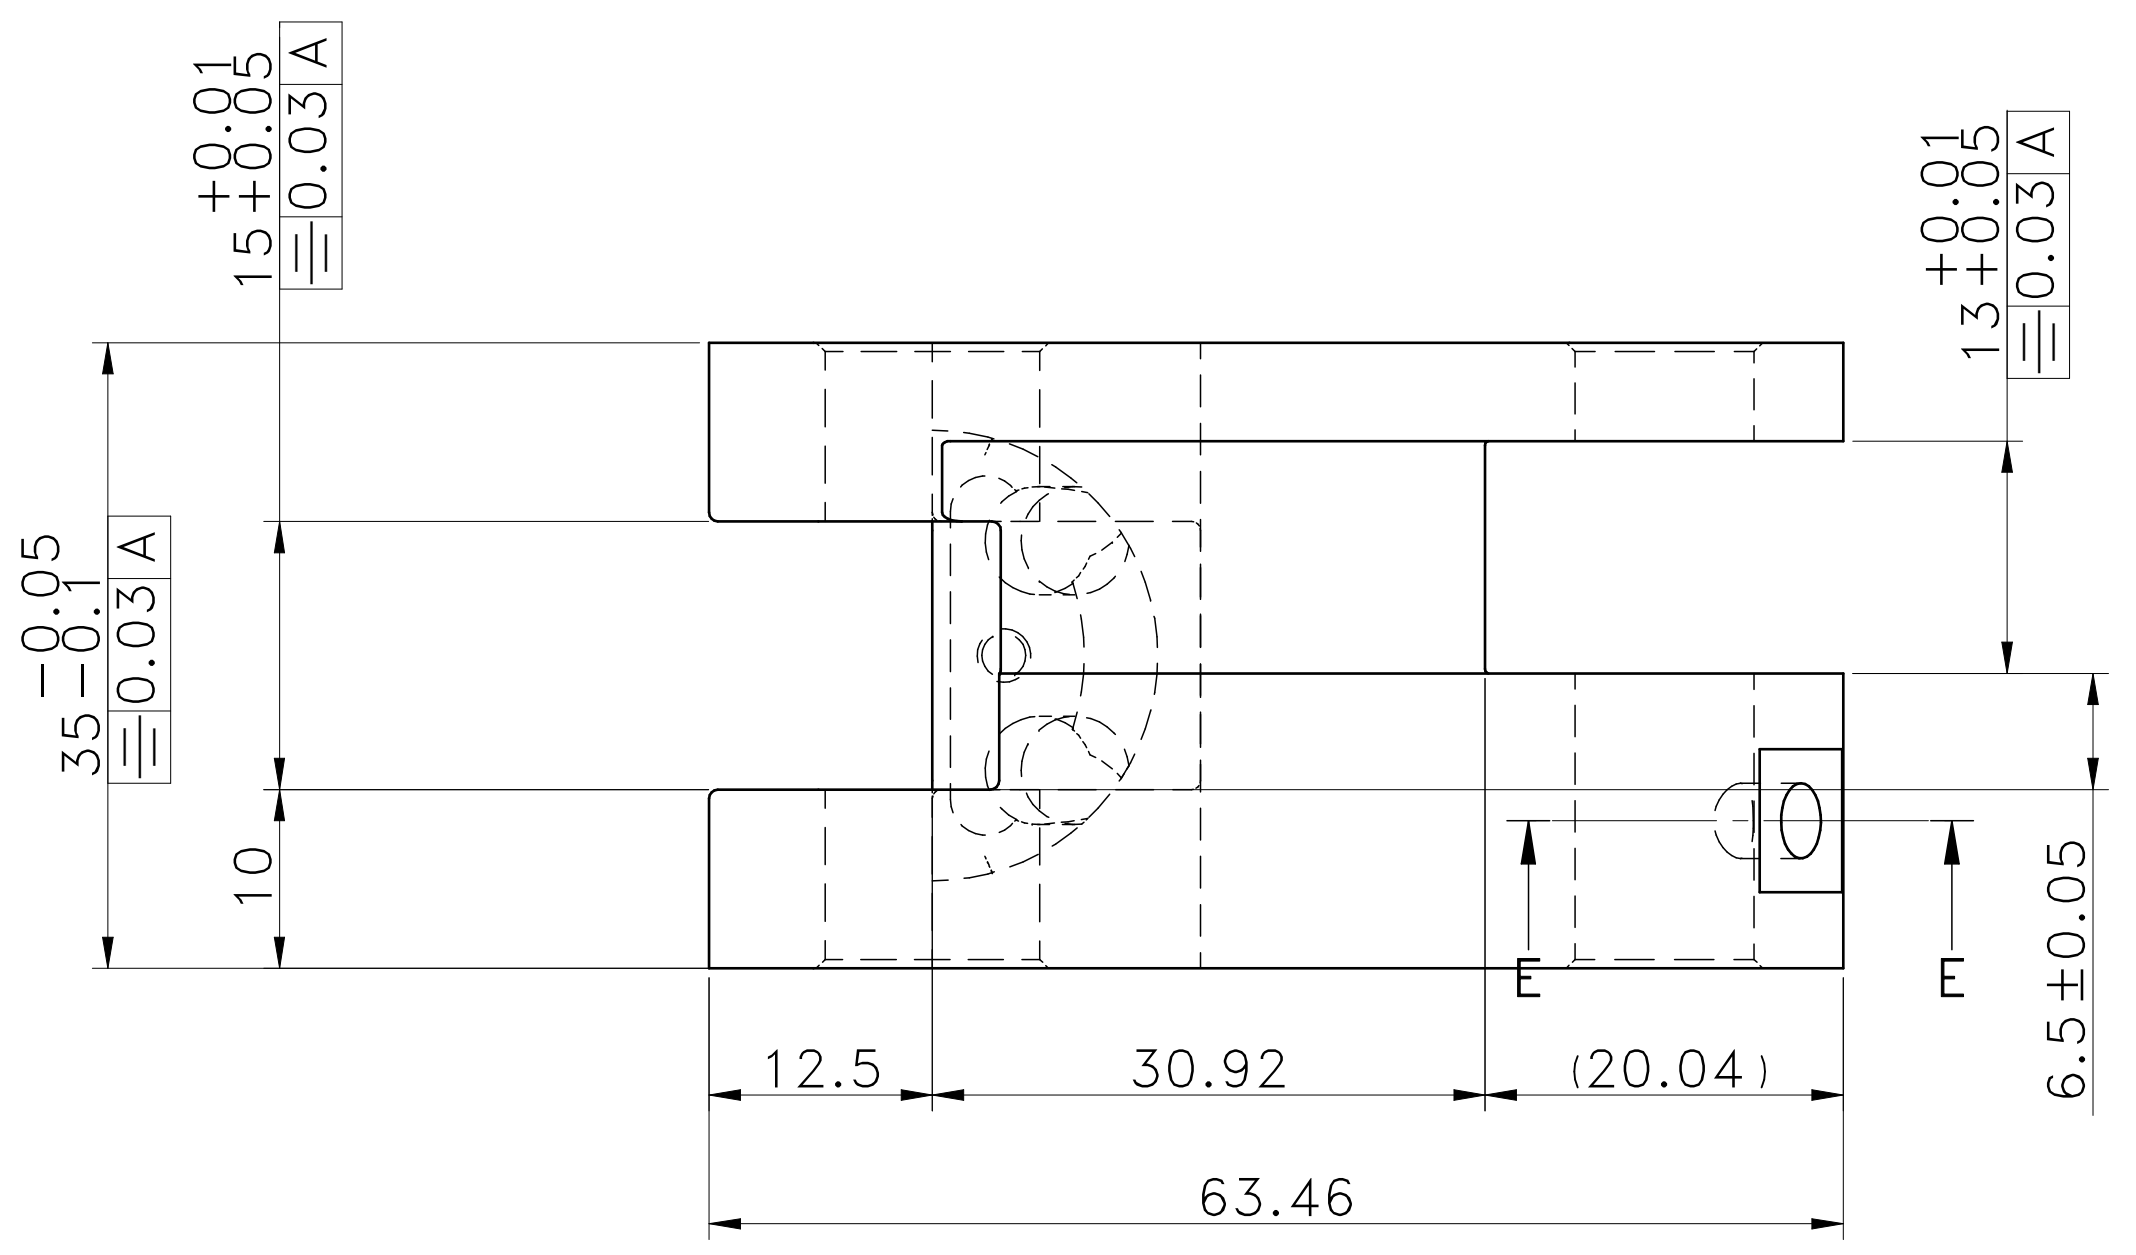
15 +0.01 / +0.05
⌯ 0.03 A
13 +0.01 / +0.05
⌯ 0.03 A
35 −0.05 / −0.1
⌯ 0.03 A
10
E
E
6.5±0.05
12.5
30.92
(20.04)
63.46

TOP VIEW
SCALE/ÉCHELLE 2:1

T + S NOTE :

H.T.PROCESS : REFER NOTE
HARDNESS & DEPTH : REFER NOTE
FINISH & DEPTH : REFER NOTE
TEST COUPON SIZE : Ø42 (20mmLENGTH − 01NOS)
WELD CLASS : B IF APPLICABLE

MTC REPORT REQURIED
NON DESTRUCTIVE TESTING (IF APPLICABLE)

RAW MATERIAL	HEAT TREATMENT	FINISH COMPOMENT
UT	DP+UT	MPI

HEAT TREATMENT :−
1. SURFACE HARDNESS UPTO 50~55 HRC. DEPTH 0.2~0.3MM
2. CORE HARDNESS UPTO 40 HRC.
3. RETAPPING TO BE DONE AFTER SURFACE TREATMENT
AT SUPPLIER END.(IF APPLICABLE)

1

NOTE :−
TO BE CNC MACHINED AS PER 3D DATA.

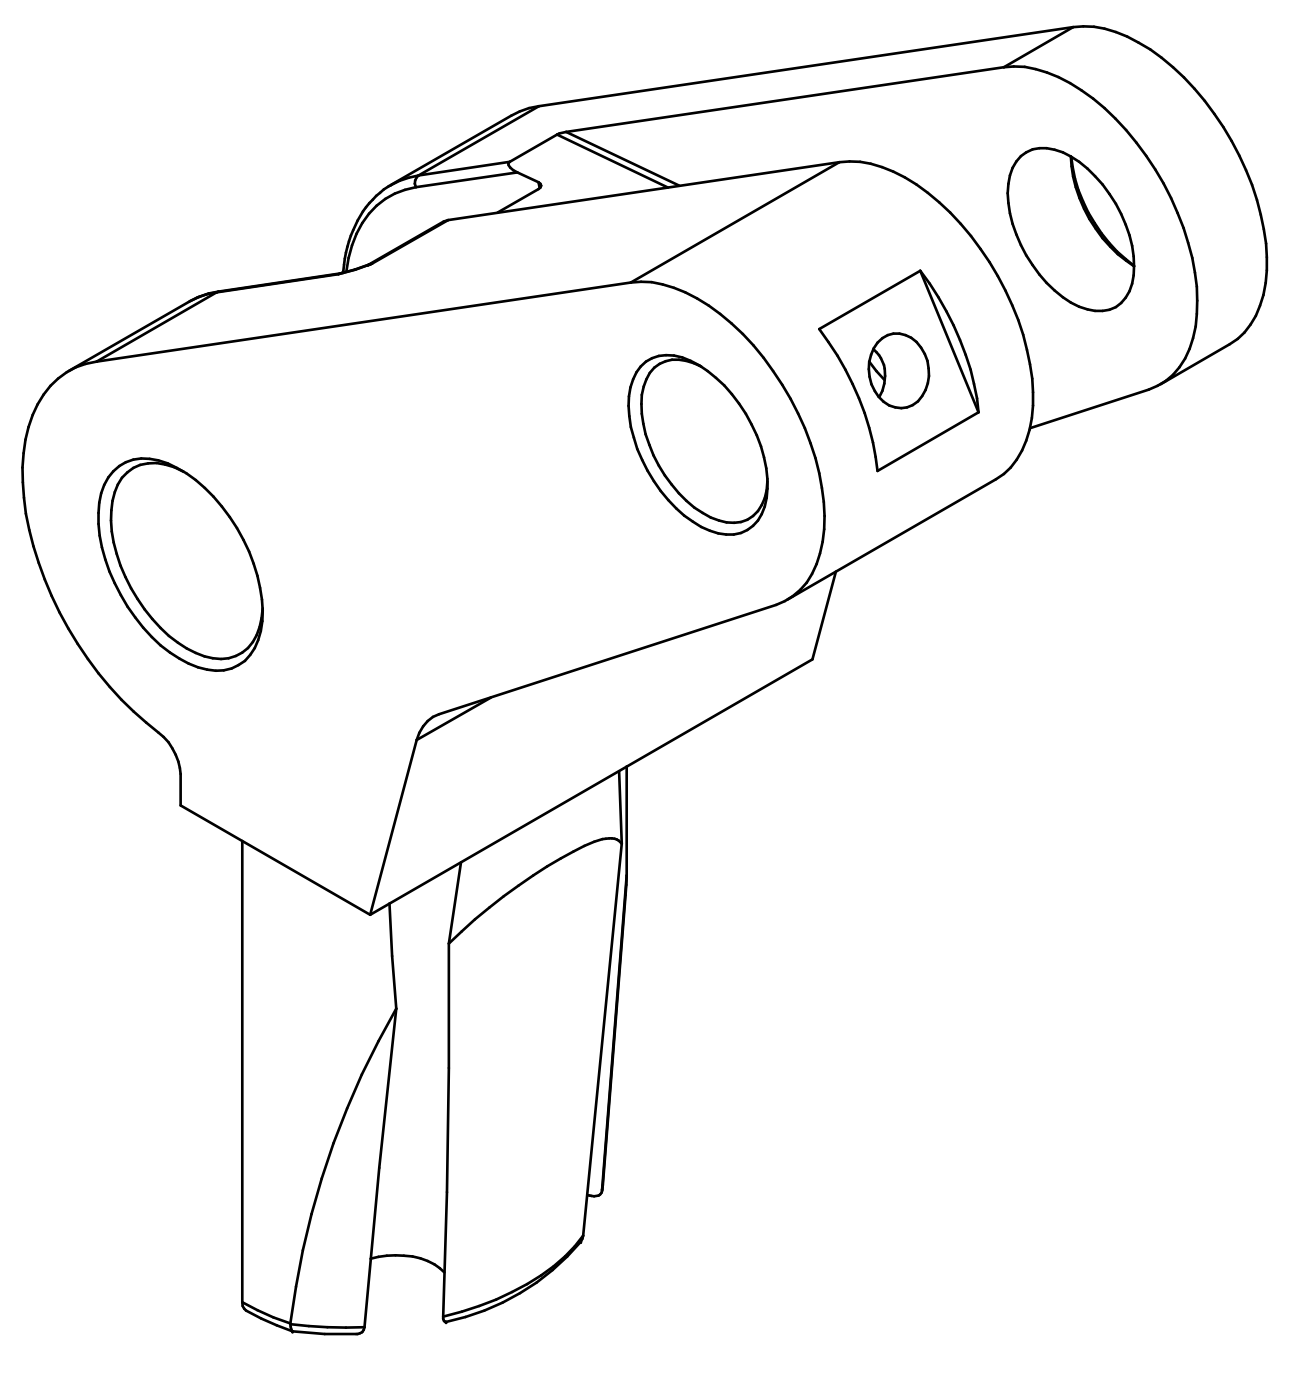

ISO VIEW
SCALE/ÉCHELLE 2:1

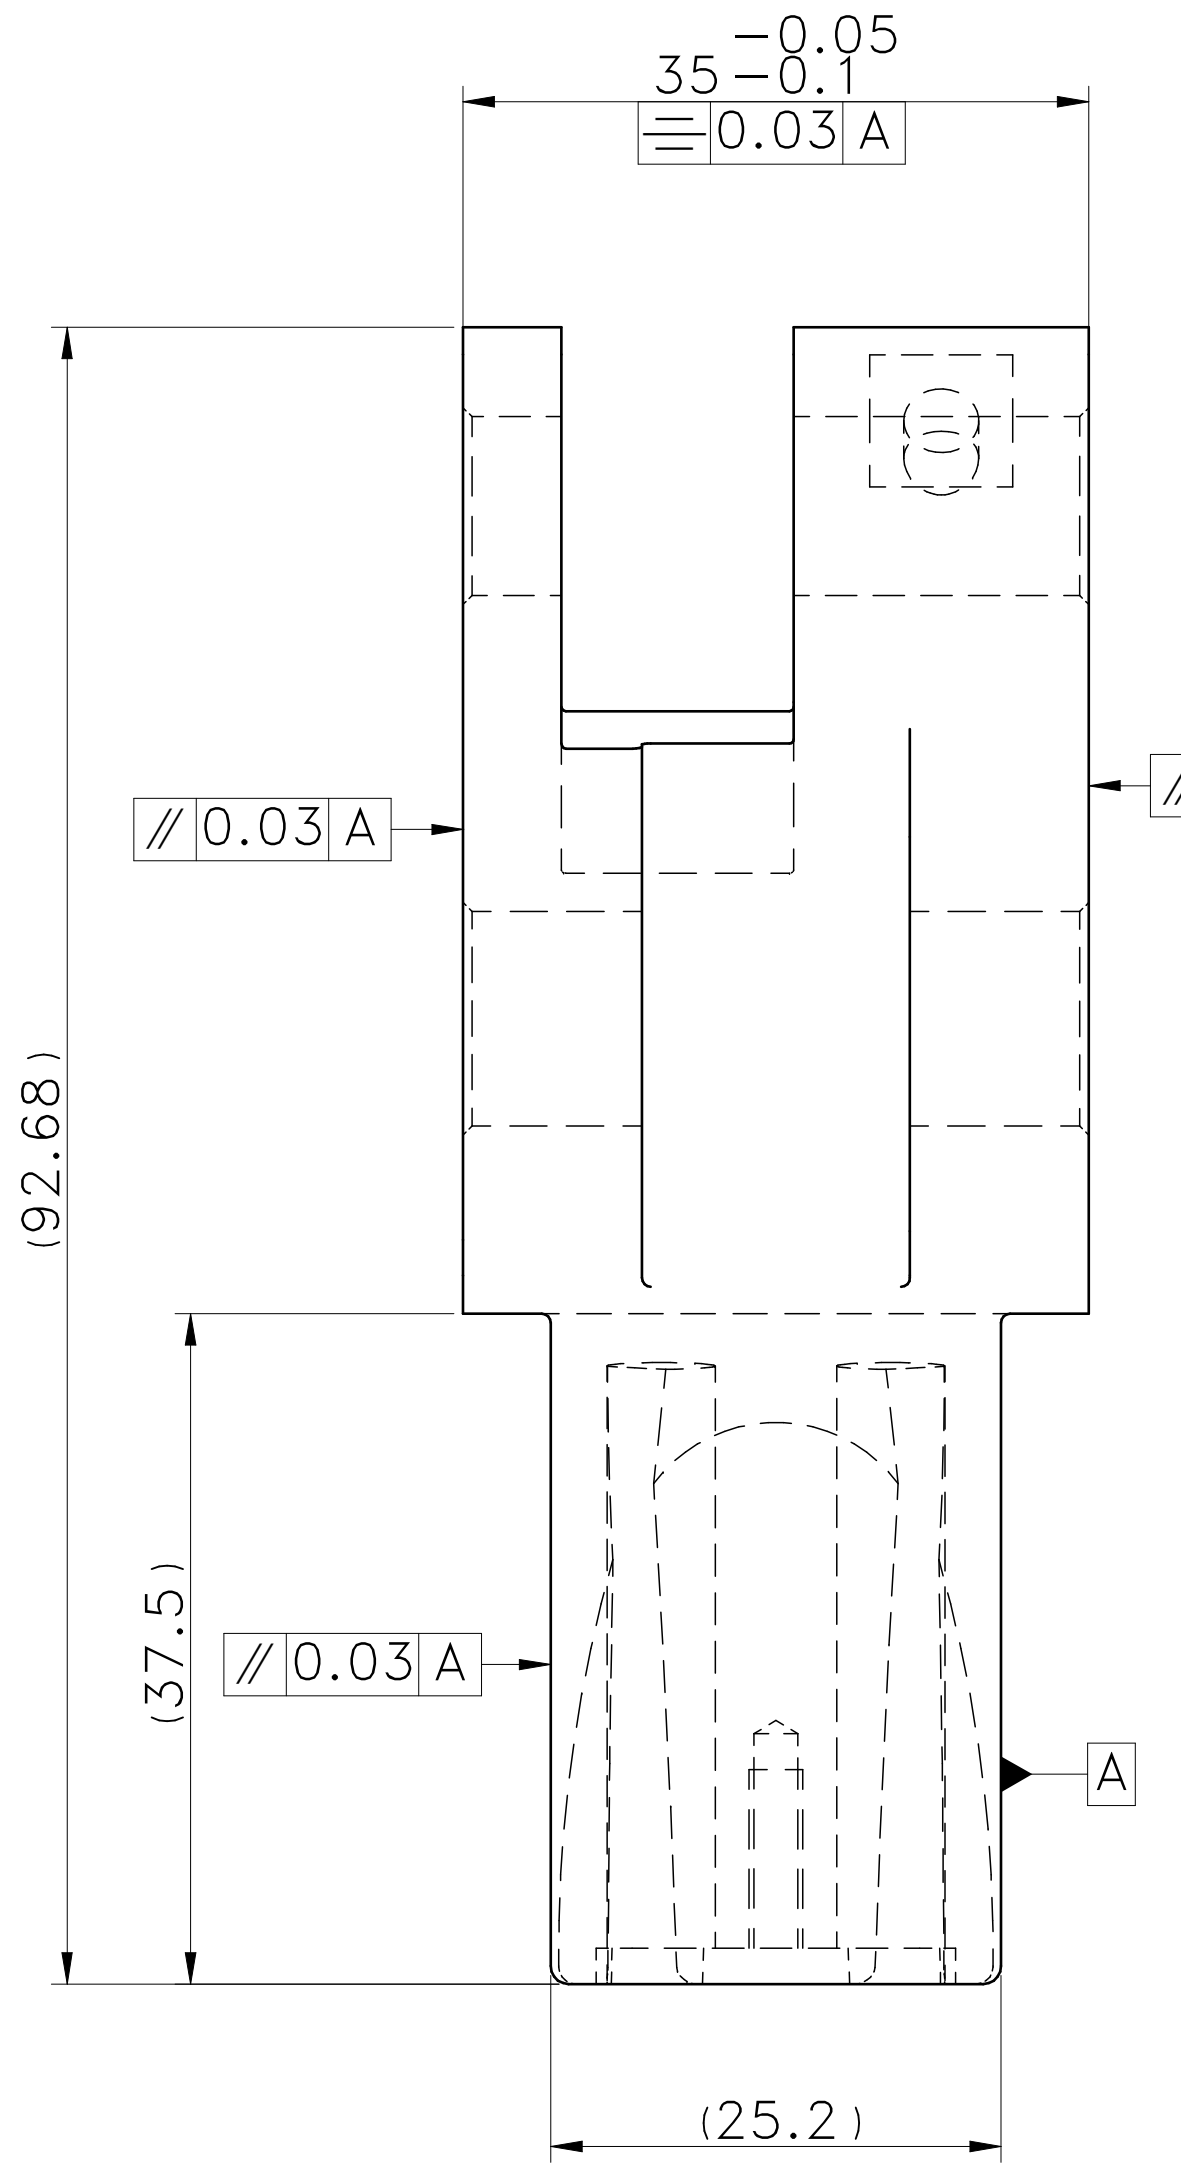
35 −0.05 / −0.1
⌯ 0.03 A
// 0.03 A
// 0.03 A
(92.68)
(37.5)
// 0.03 A
A
(25.2)

VIEW C
SCALE/ÉCHELLE 2:1

C

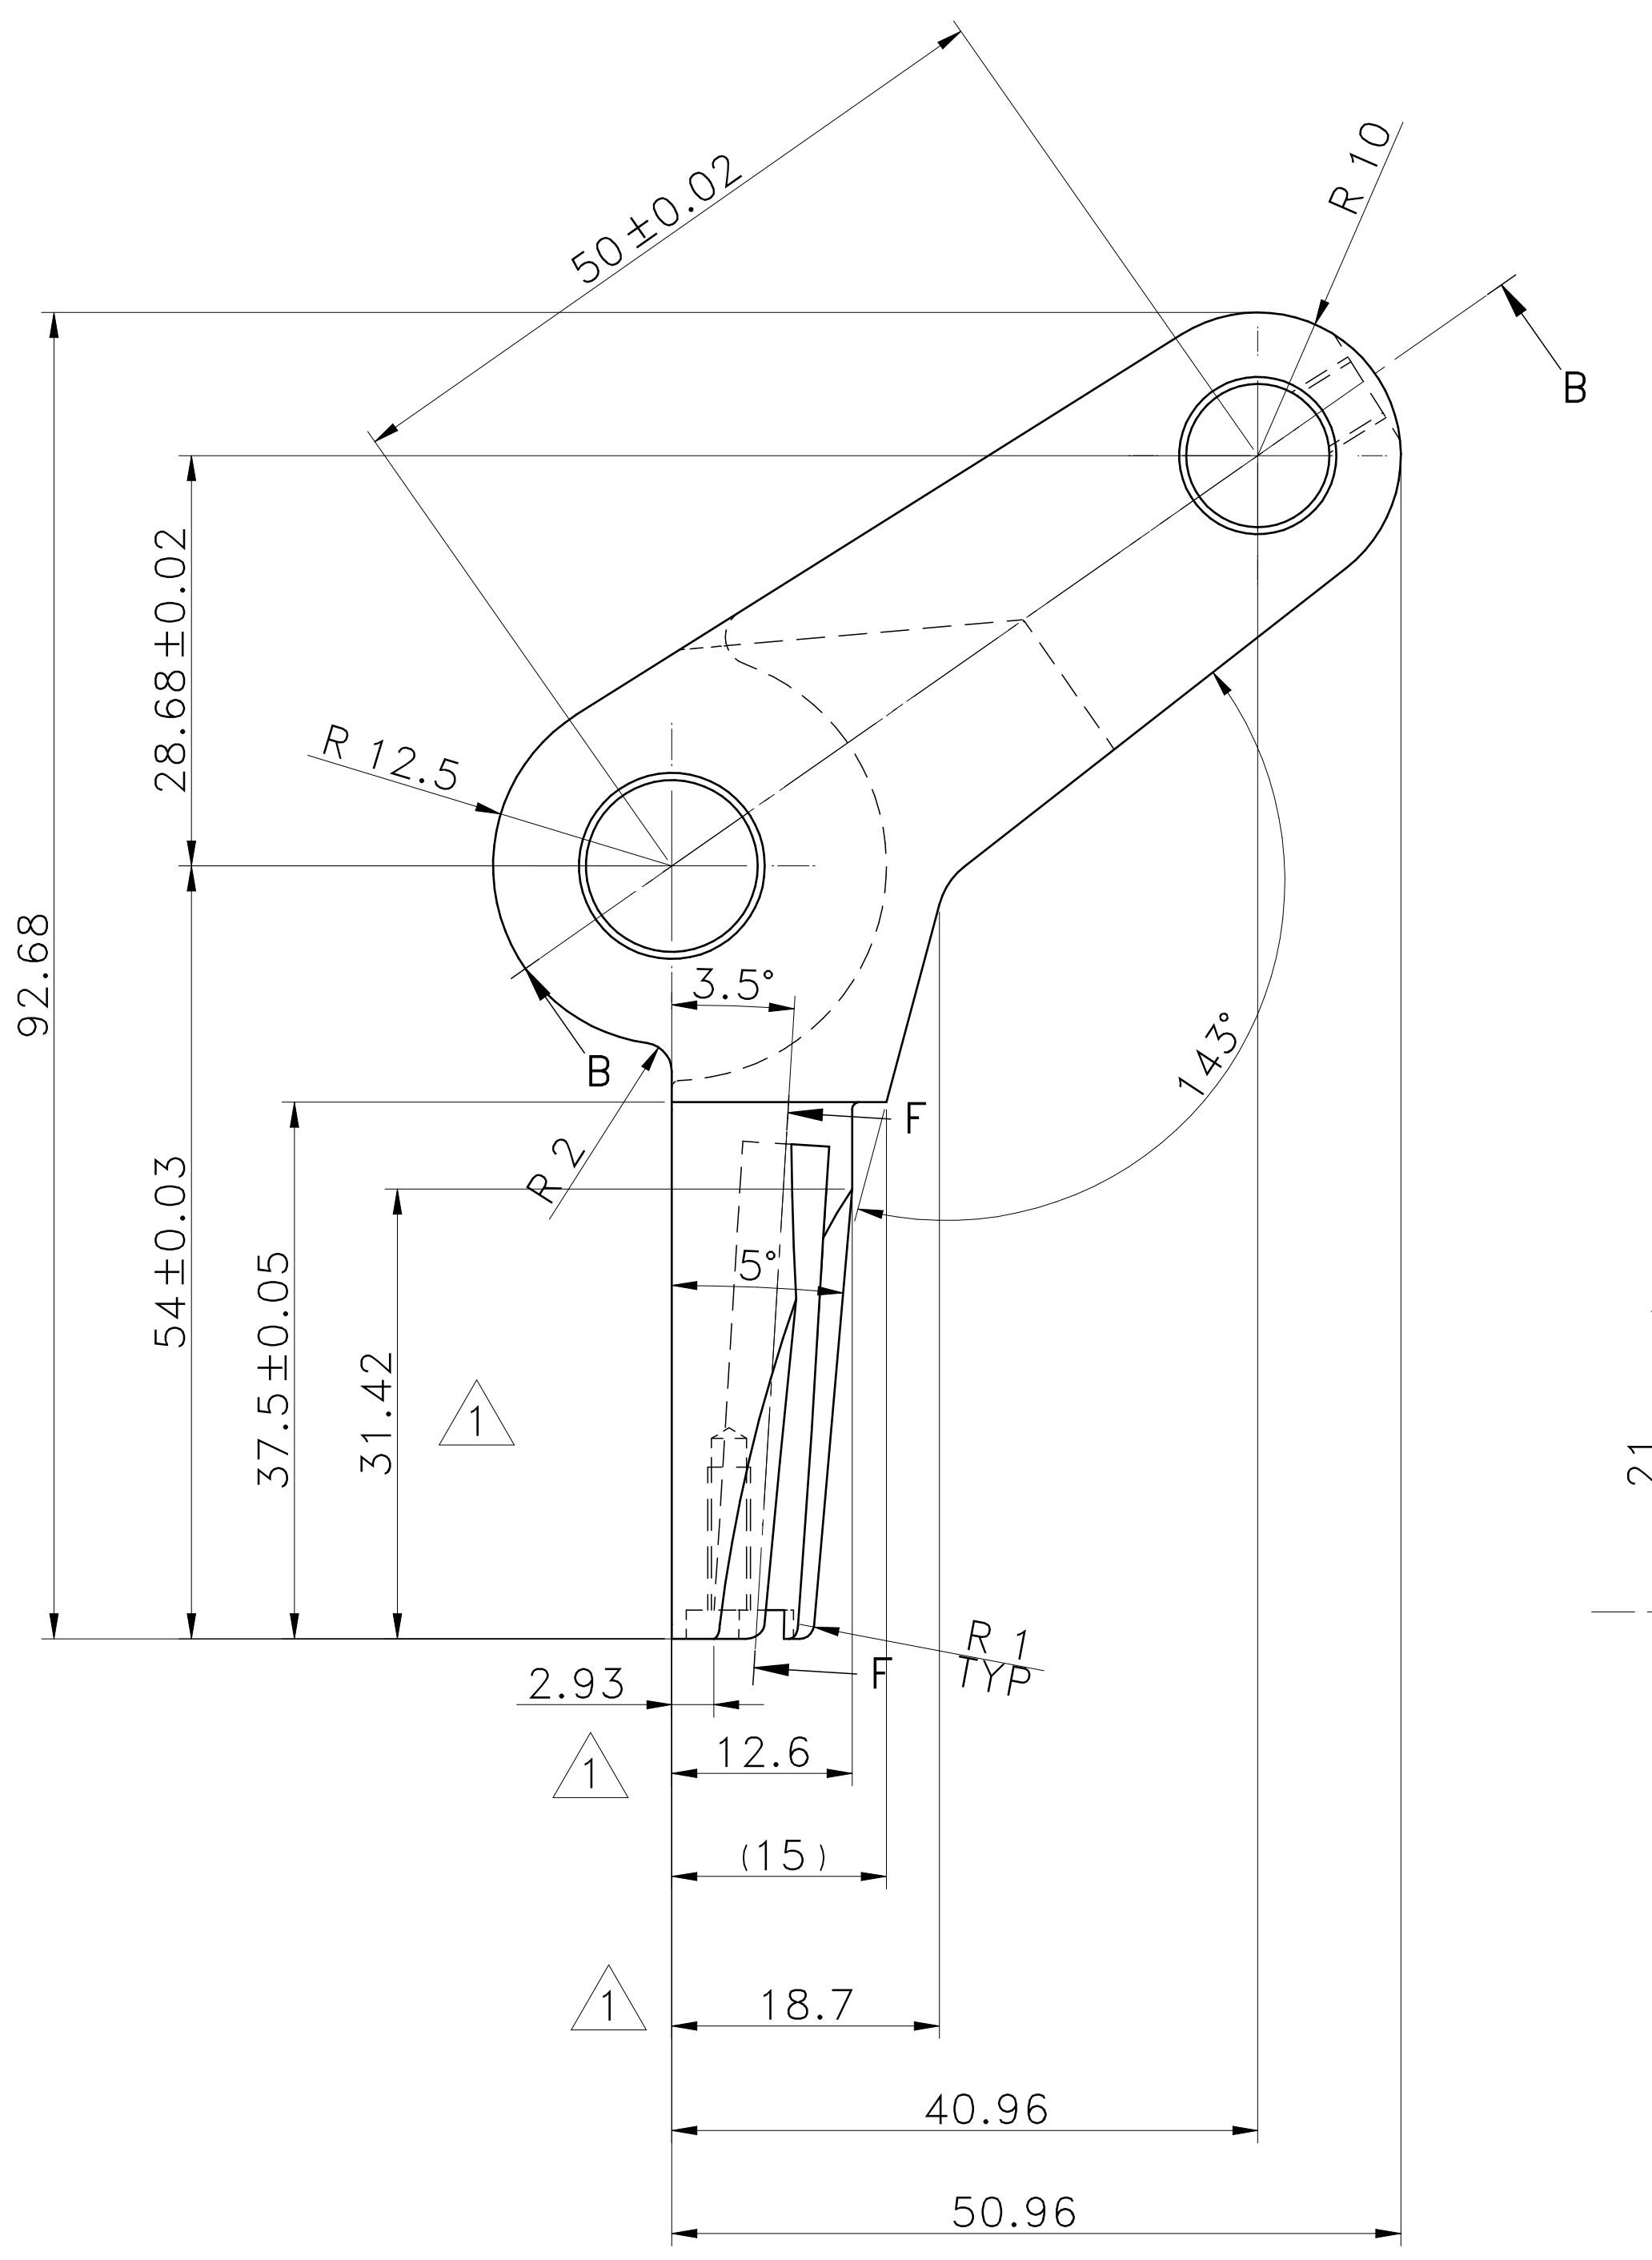
50±0.02
R 10
B
28.68±0.02
R 12.5
92.68
3.5°
B
R 2
F
143°
54±0.03
37.5±0.05
31.42
1
5°
R 1 TYP
F
2.93
1
12.6
(15)
1
18.7
40.96
50.96

FRONT VIEW
SCALE/ÉCHELLE 2:1

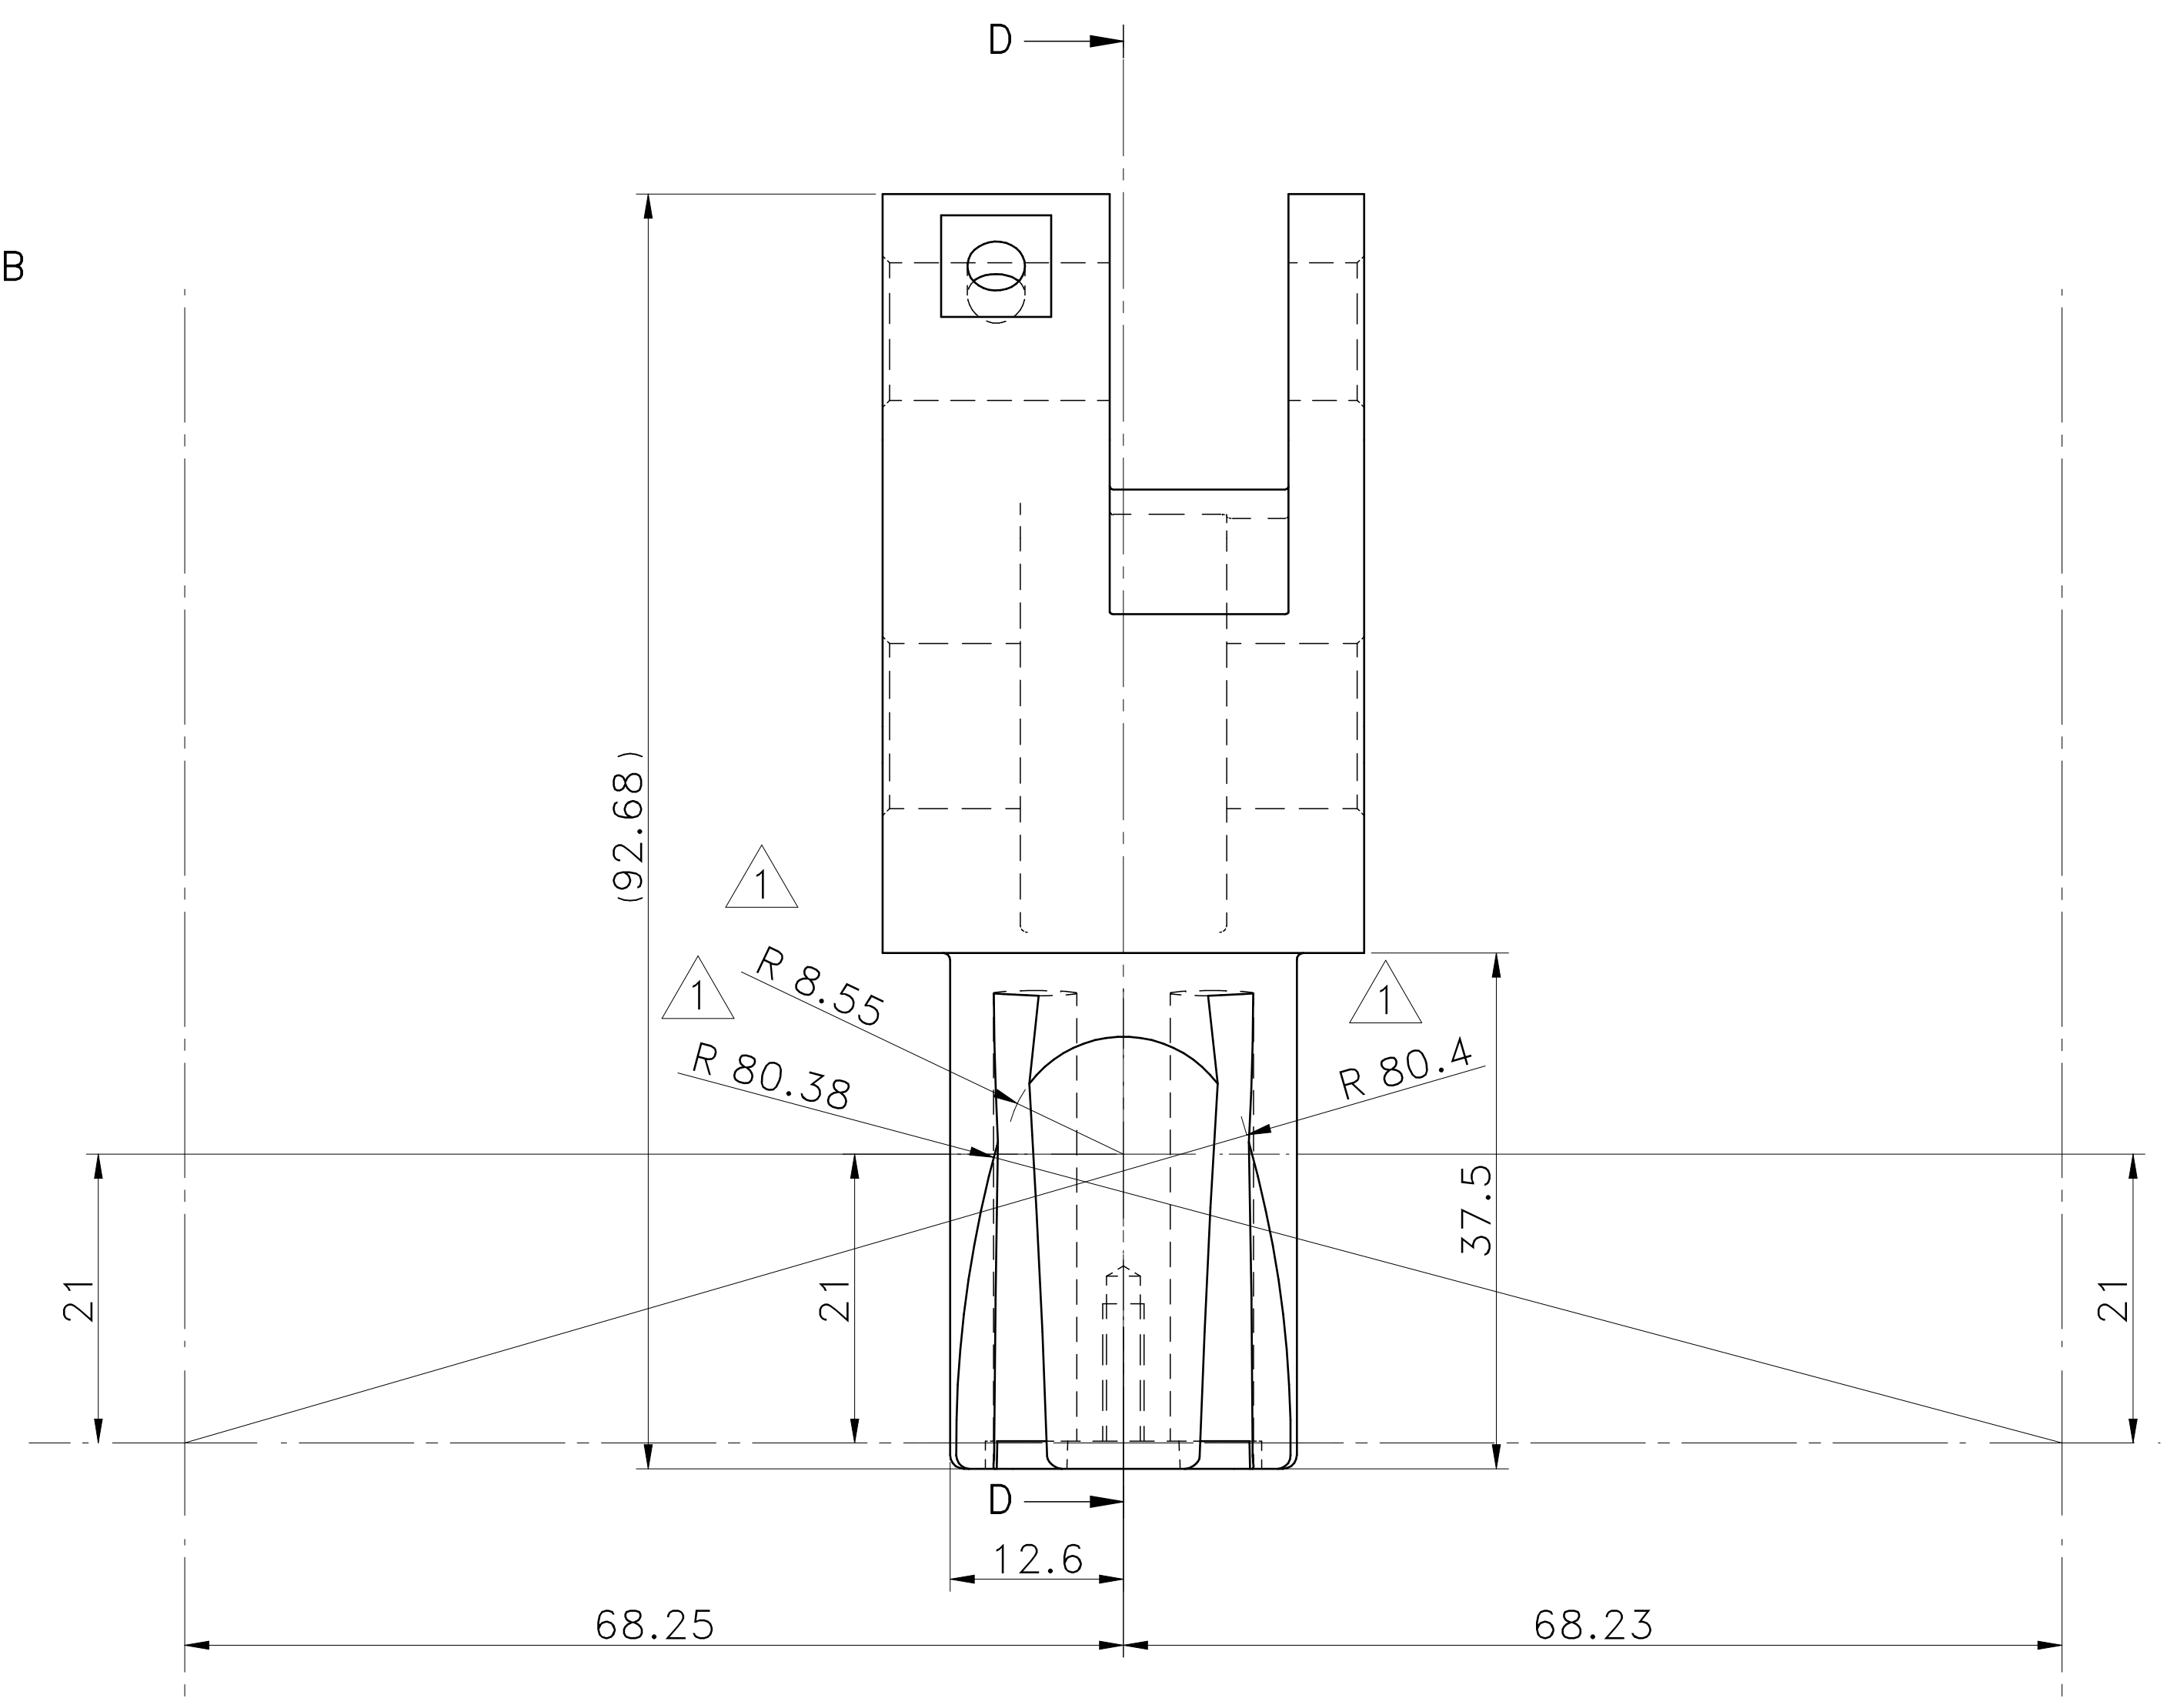
D
(92.68)
1
1
R 8.55
R 80.38
1
R 80.4
37.5
21
21
21
D
12.6
68.25
68.23

SIDE VIEW
SCALE/ÉCHELLE 2:1

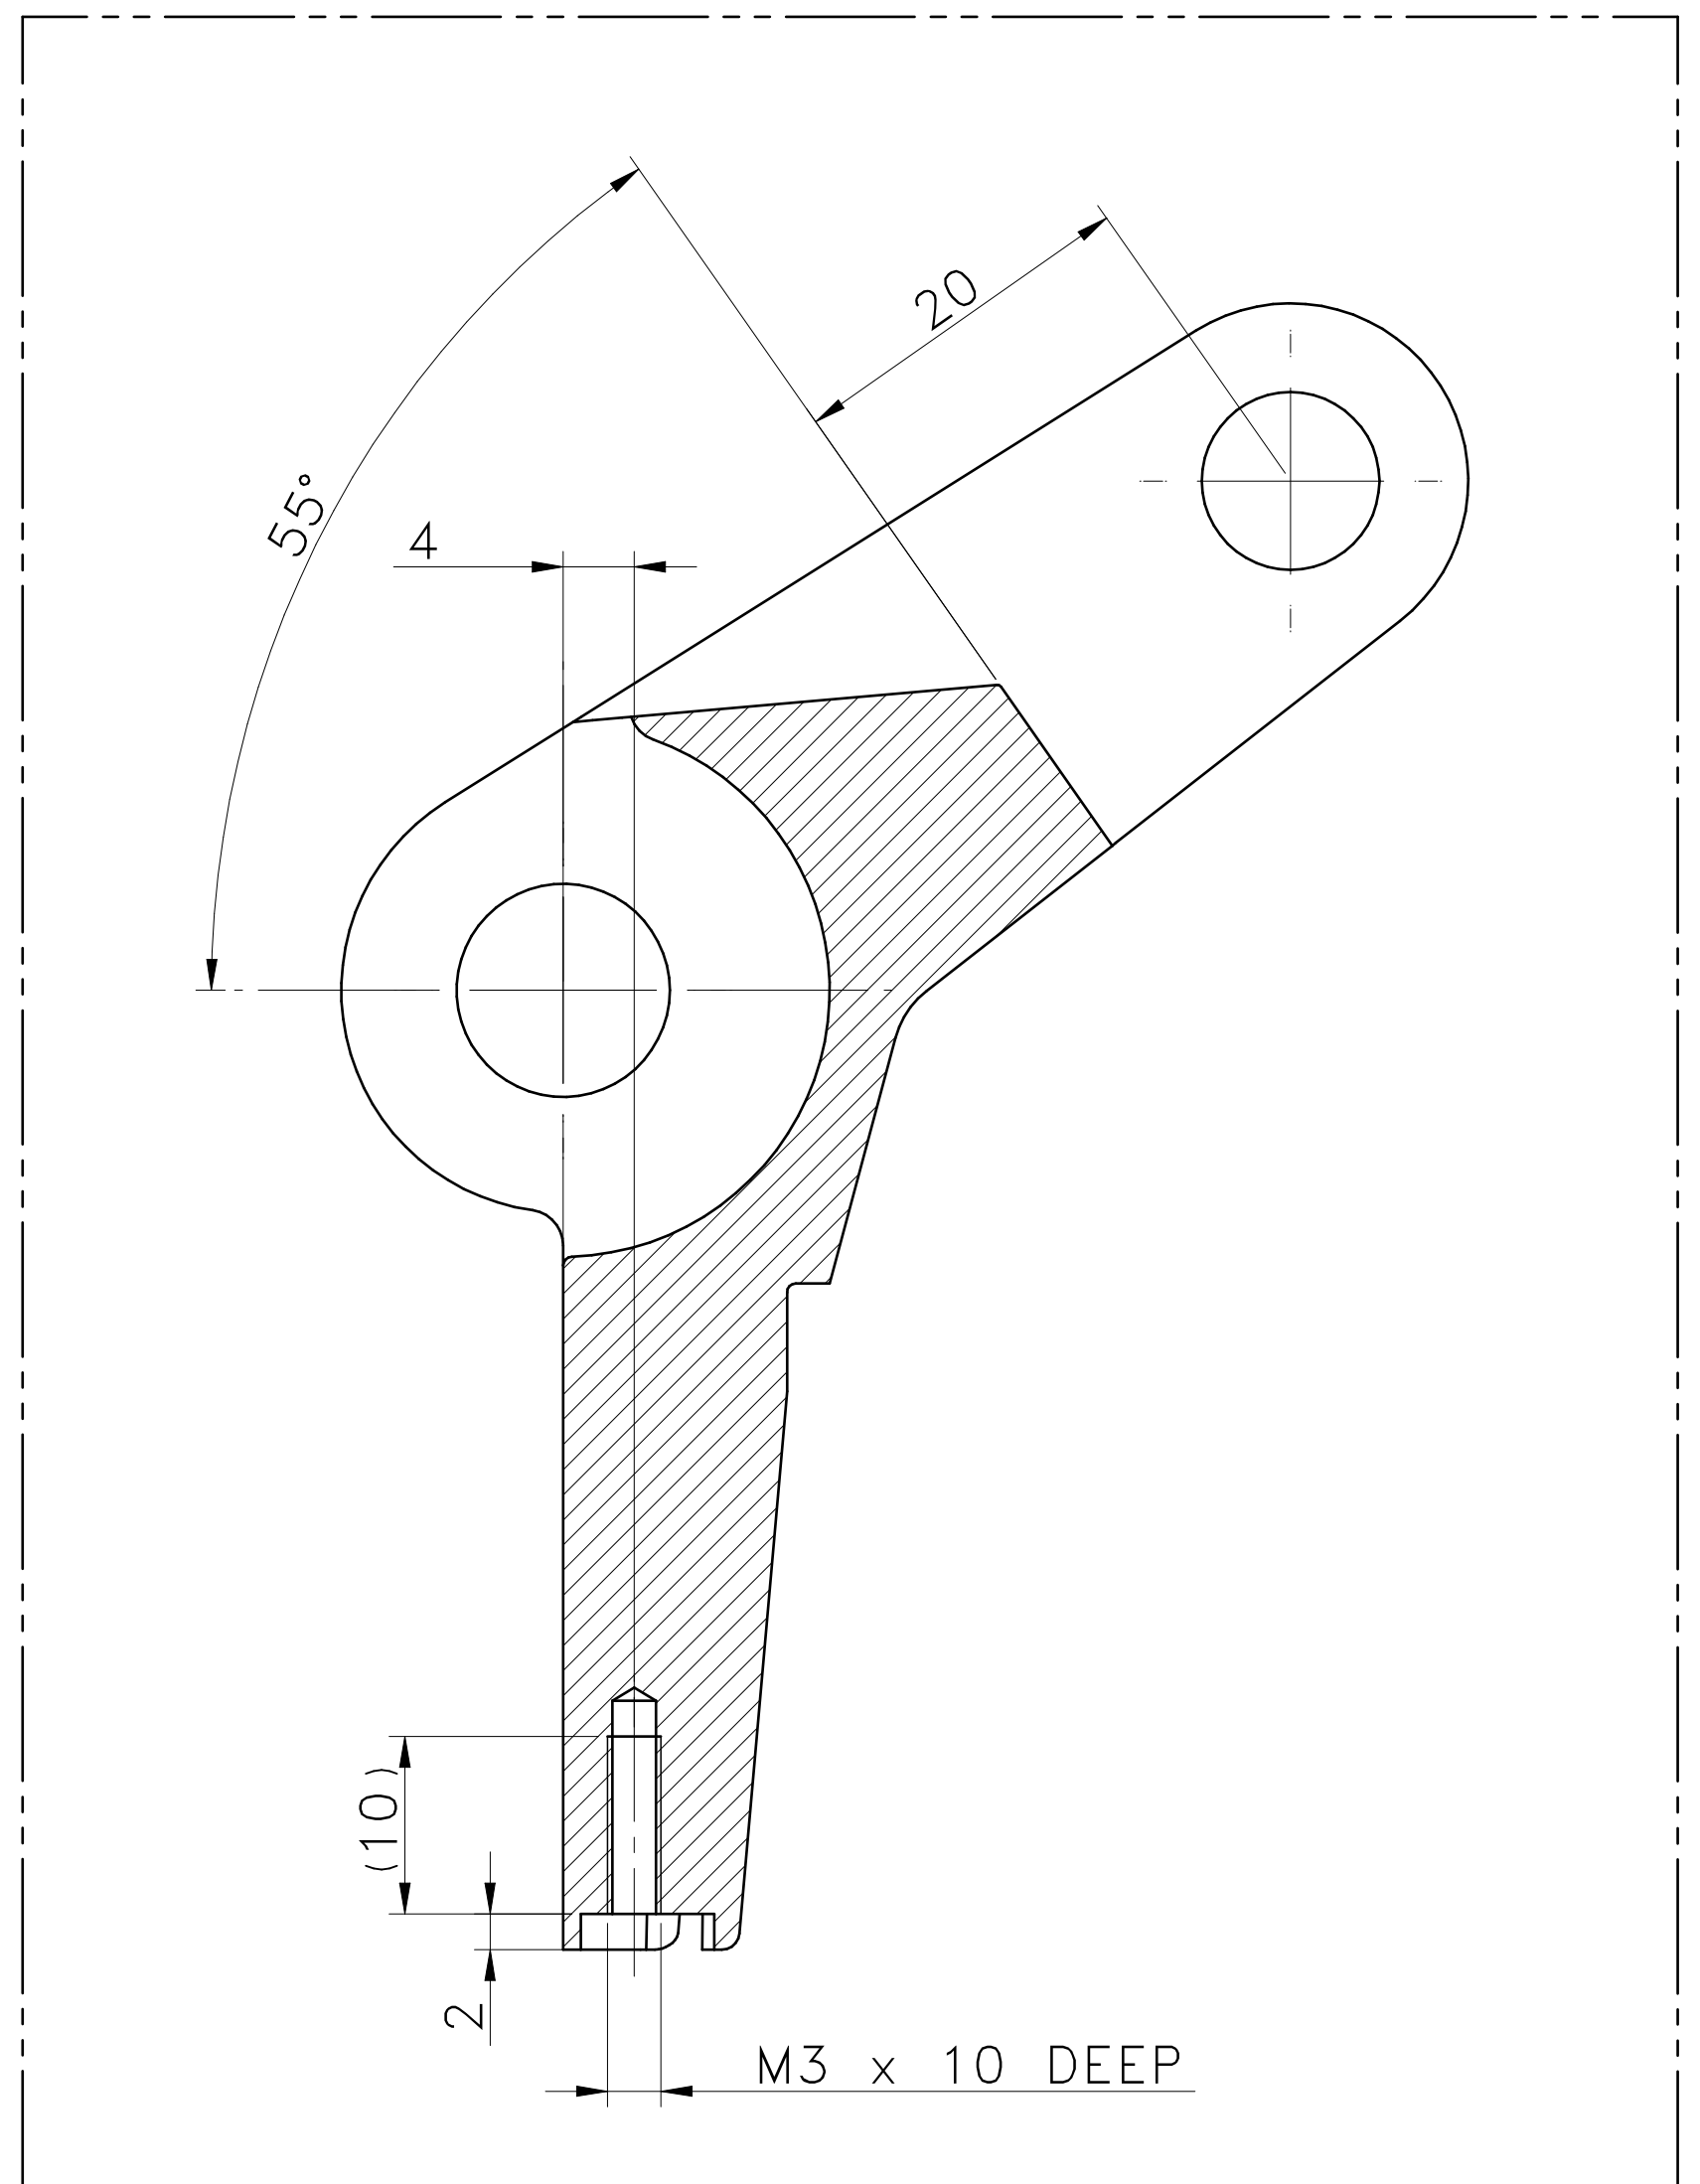
55°
4
20
(10)
2
M3 x 10 DEEP

SECTION D−D
SCALE/ÉCHELLE 2:1

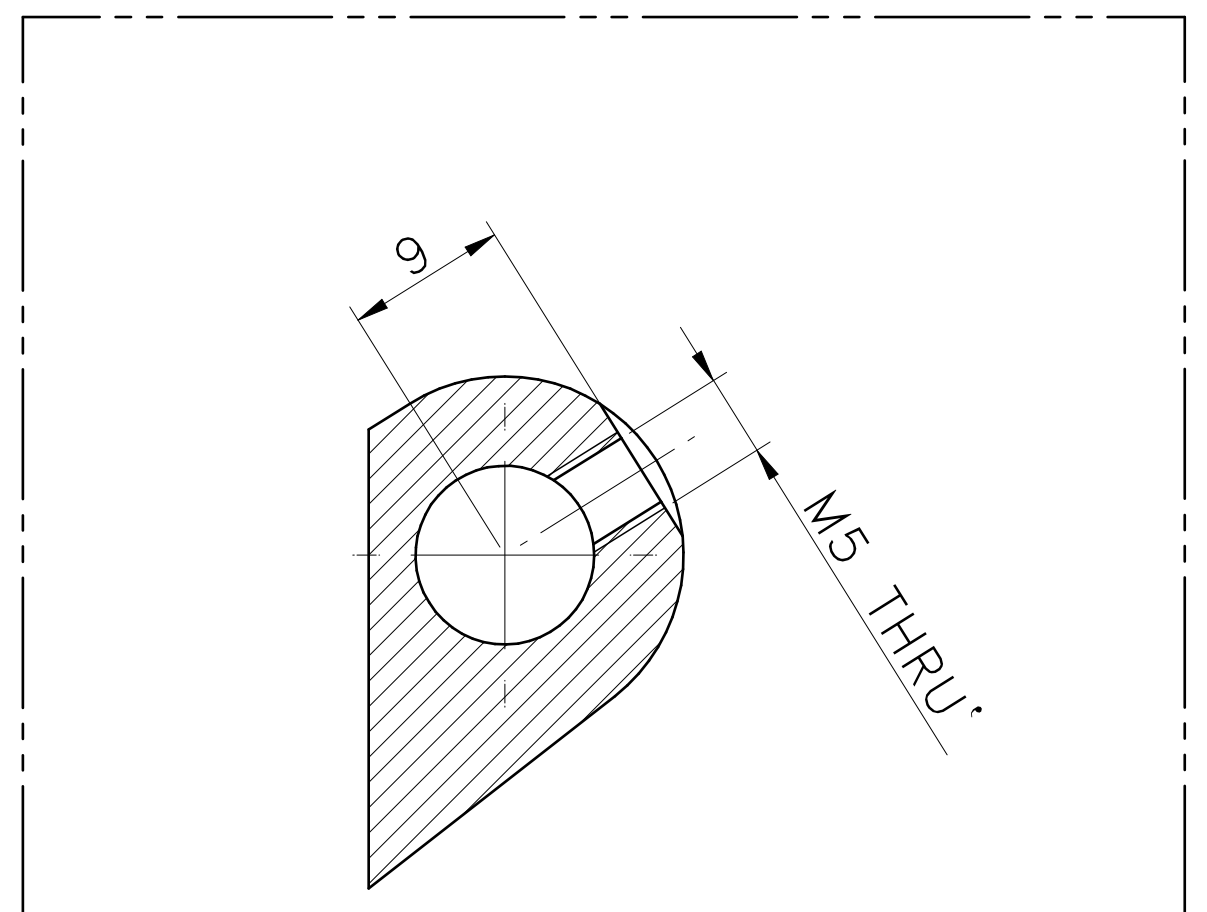

SECTION E−E
SCALE/ÉCHELLE 2:1

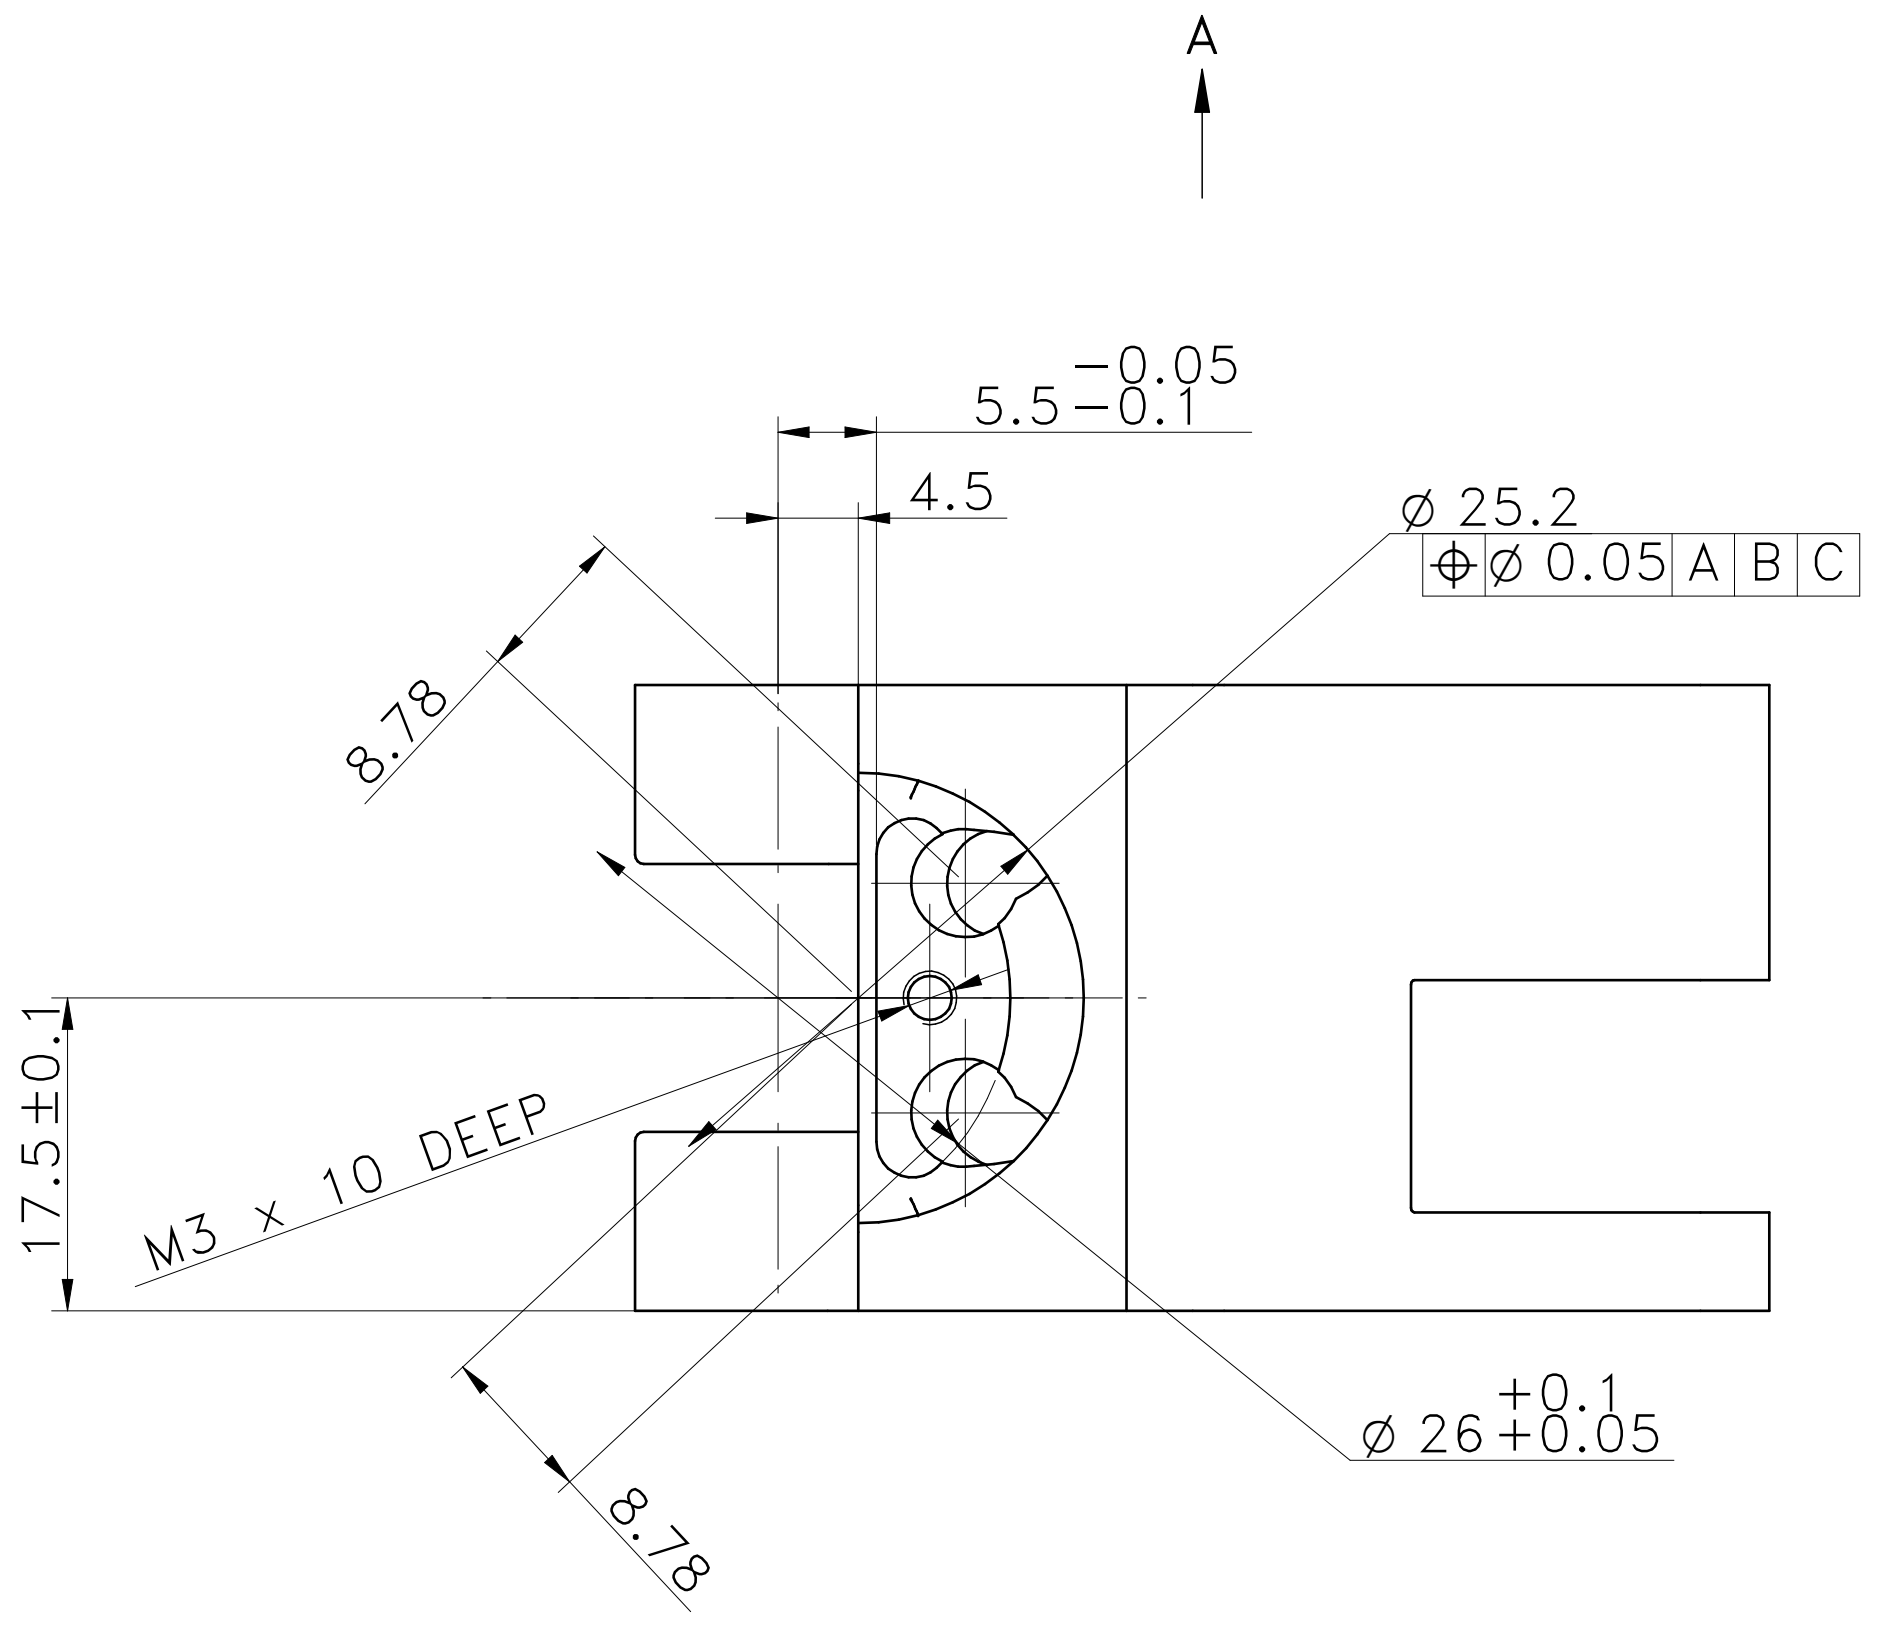
A
5.5 −0.05 / −0.1
4.5
Ø 25.2
⊕ Ø 0.05 A B C
8.78
17.5±0.1
M3 x 10 DEEP
Ø 26 +0.1 / +0.05
8.78

VIEW A / BOTTOM VIEW
SCALE/ÉCHELLE 2:1

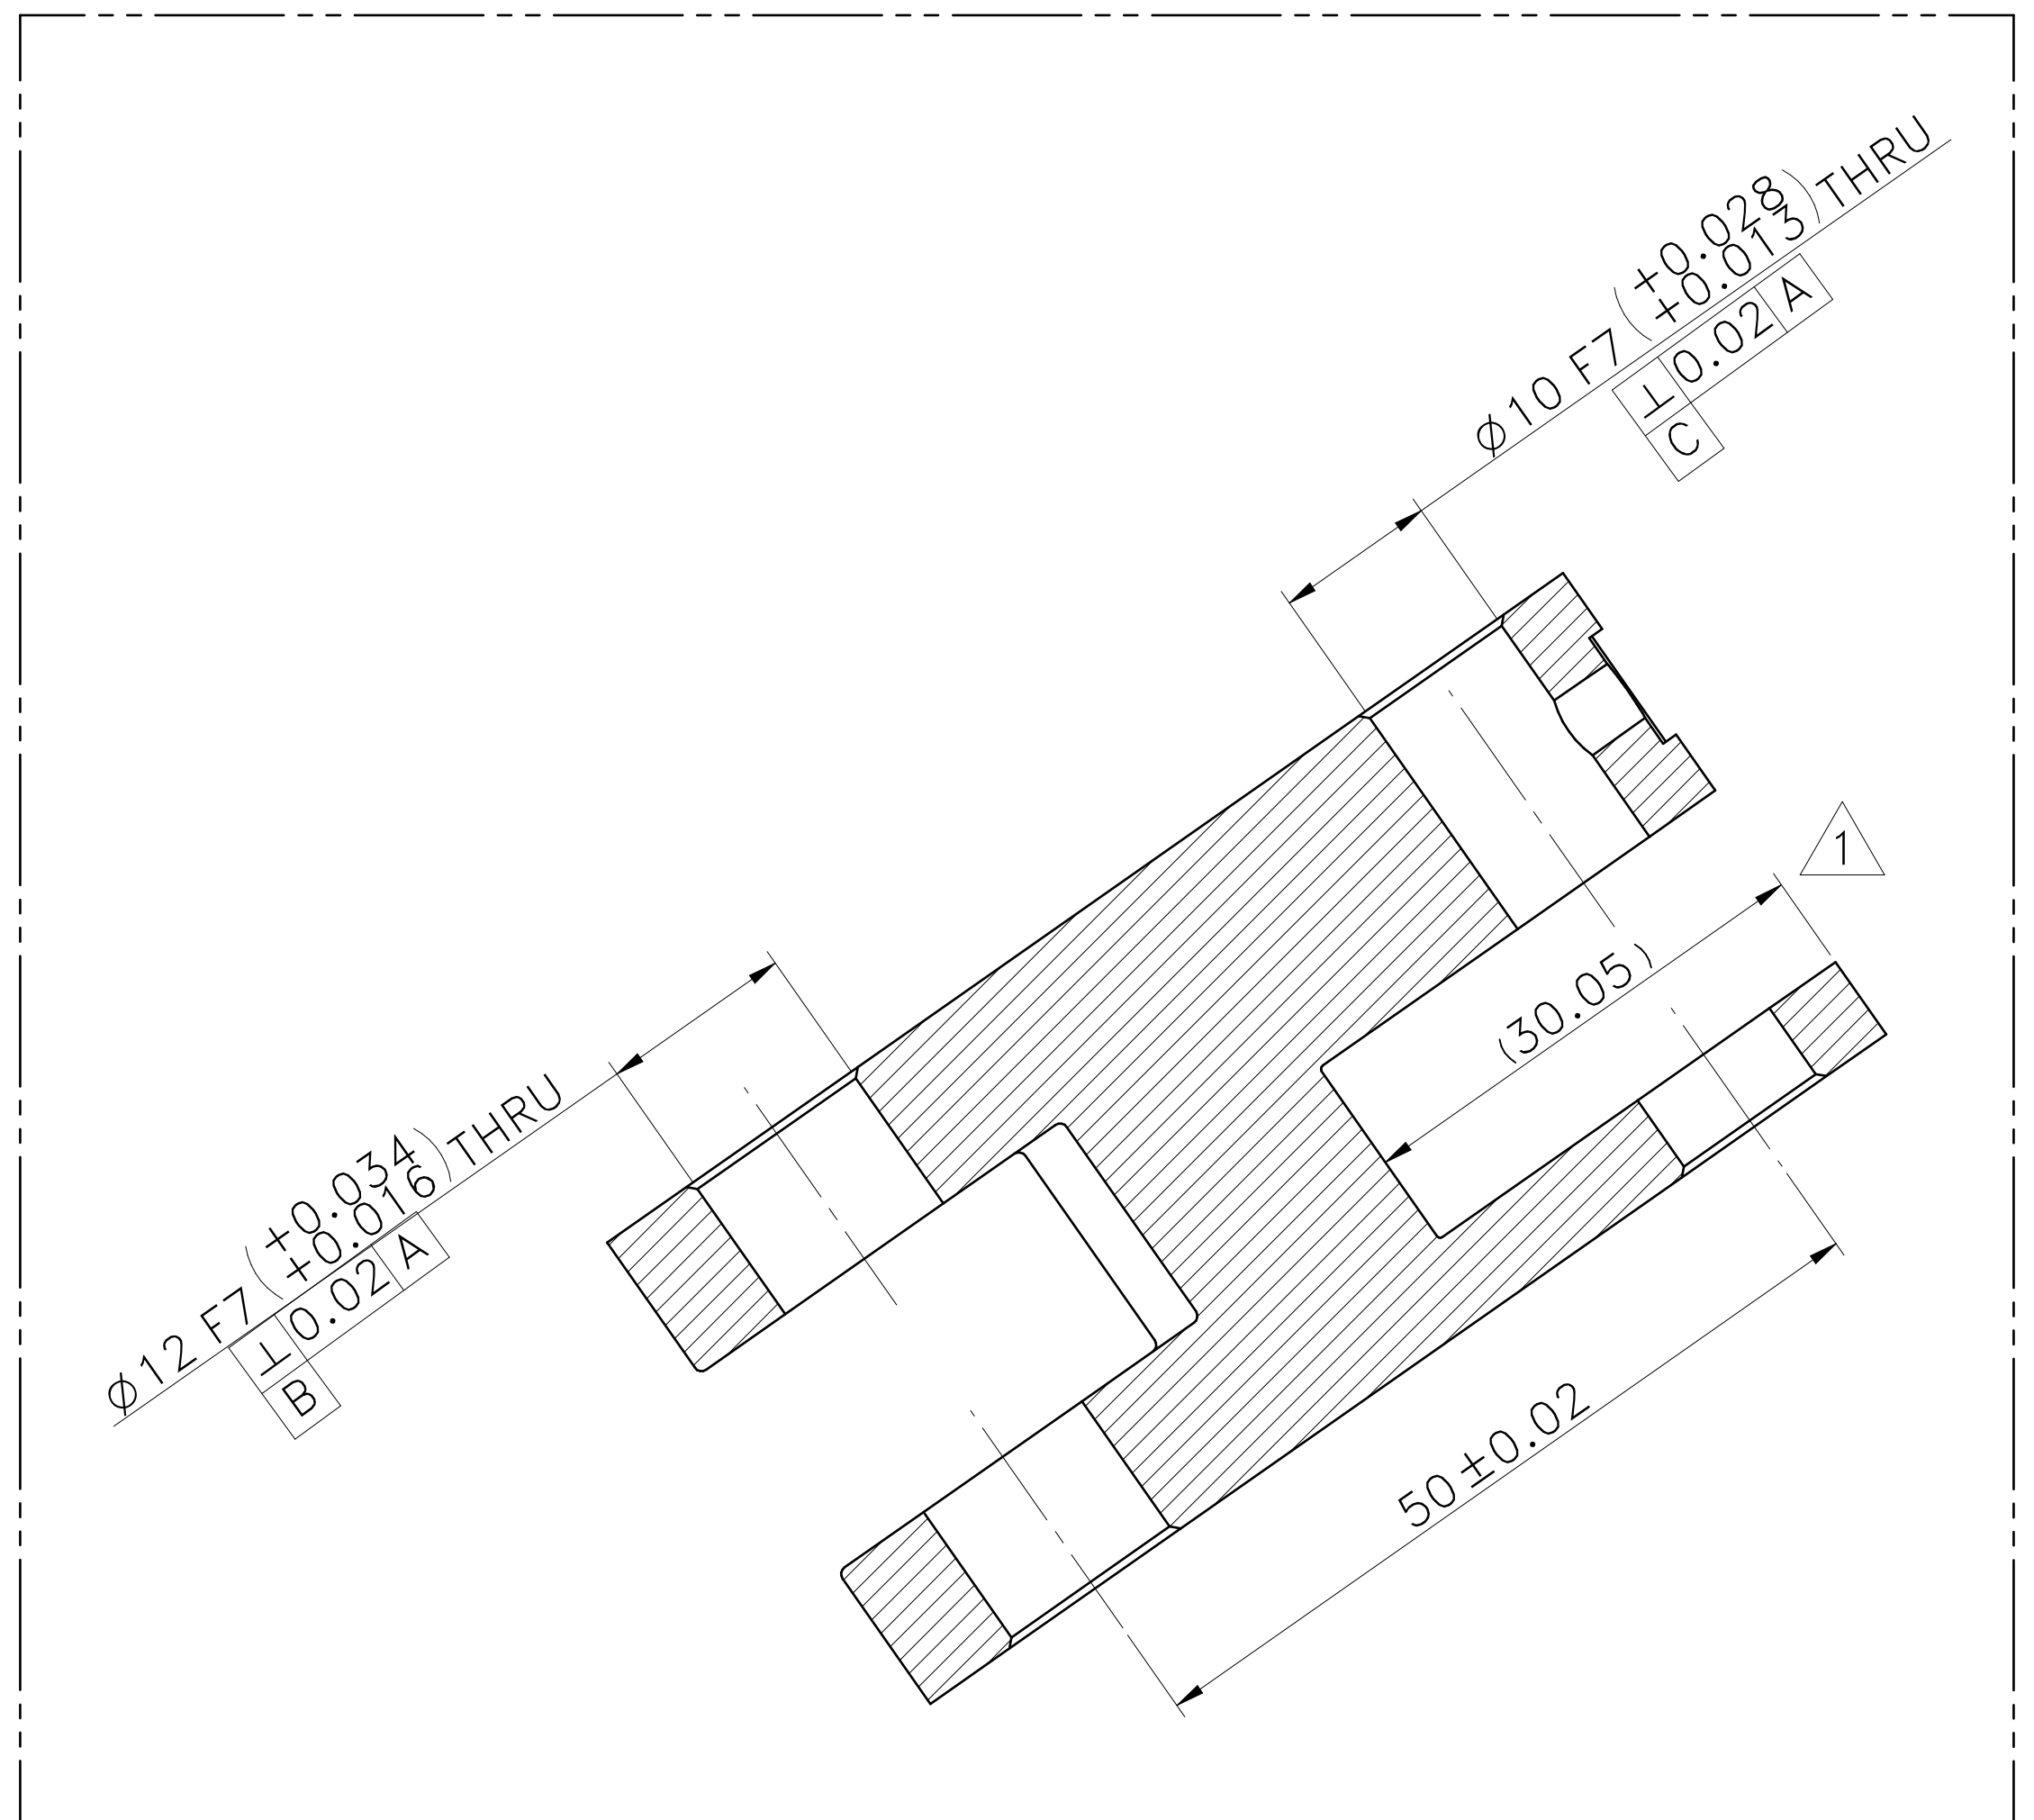
Ø10 F7 (+0.028 / +0.013) THRU
⊥ 0.02 A
C
1
(30.05)
Ø12 F7 (+0.034 / +0.016) THRU
⊥ 0.02 A
B
50±0.02

SECTION B−B
SCALE/ÉCHELLE 2:1

NOTE : (English) 1
# MATERIAL: EN−24 1
# FINISH: QPQ
# MACHINING: 3.2√(0.8√)
# WEIGHT(Kg): 0.33 kg

NOTE :−(French)
# MATÉRIEL : EN−24
# FINITION : QPQ
# MACHINES : 3.2√(0.8√)
# POIDS (Kg): 0.33 kg

NOTE :−(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :−(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

RESERVED SPACE FOR

CONTROLLED COPY

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : MW

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY
	.	.	.
1	MATL & FINISH CHANGED FROM 20MnCr5 & IZBP TO EN24 & QPQ, ALSO HEAT TRARTMENT NOTE CHANGED & MISSING DIMENSIONS ADDED	03/09/2024	03006598

WIPRO PARI GROUP

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

DESCRIPTION
GRIPPER FINGER 2

DRAWING TYPE
MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
23.81 in^2	#	#	WPP	0100	PL-02	A0

REFERENCE DWG P2207-0121-14-039_A
PART CLASS. T+S
HEAT TREATMENT REF NOTE

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006598	5489	03002882	#	**P23Y5B154537**	**01**	2 : 1
03/09/2024	03/09/2024	03/09/2024	NET WEIGHT-Kg 0.33 kg			SHEET 1 OF 1