NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

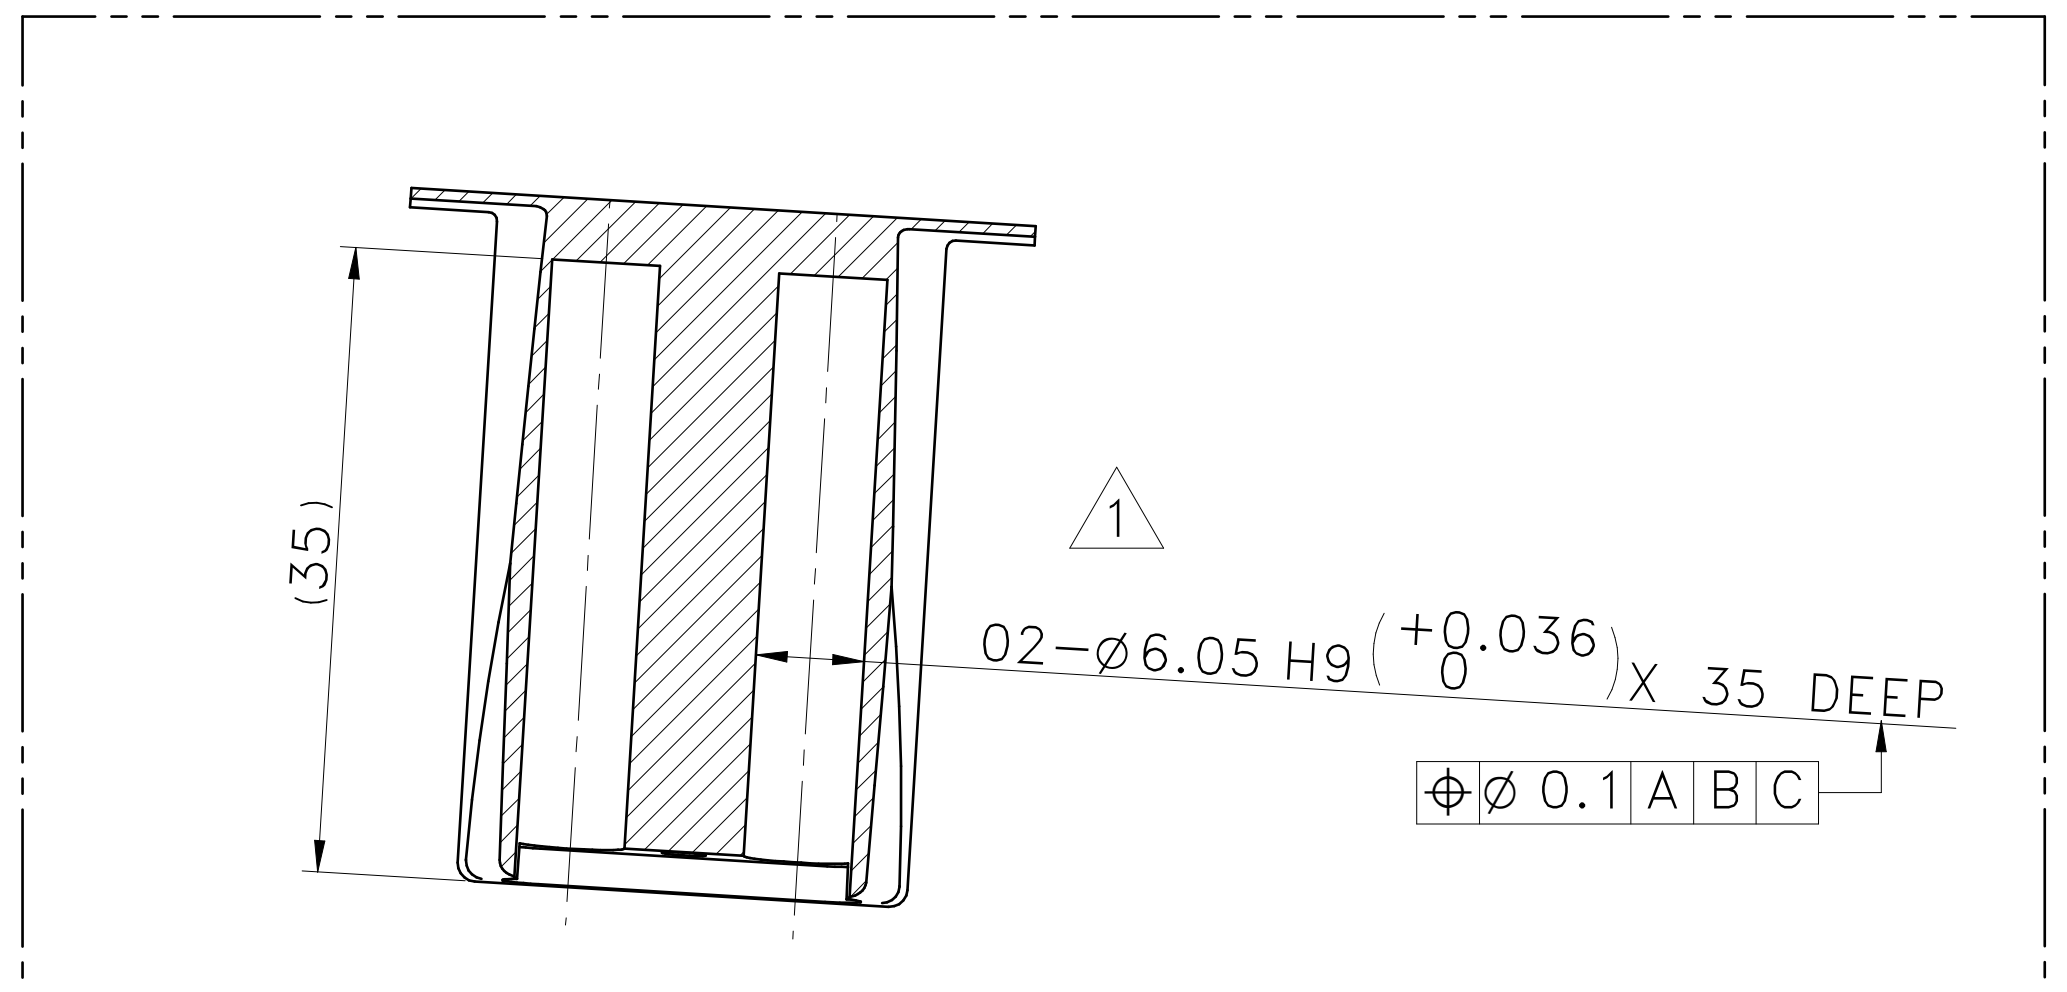

SECTION F-F
VIEW WITH ORIENTATION SHIFTED BY 3.5°
SCALE/ECHELLE 2:1

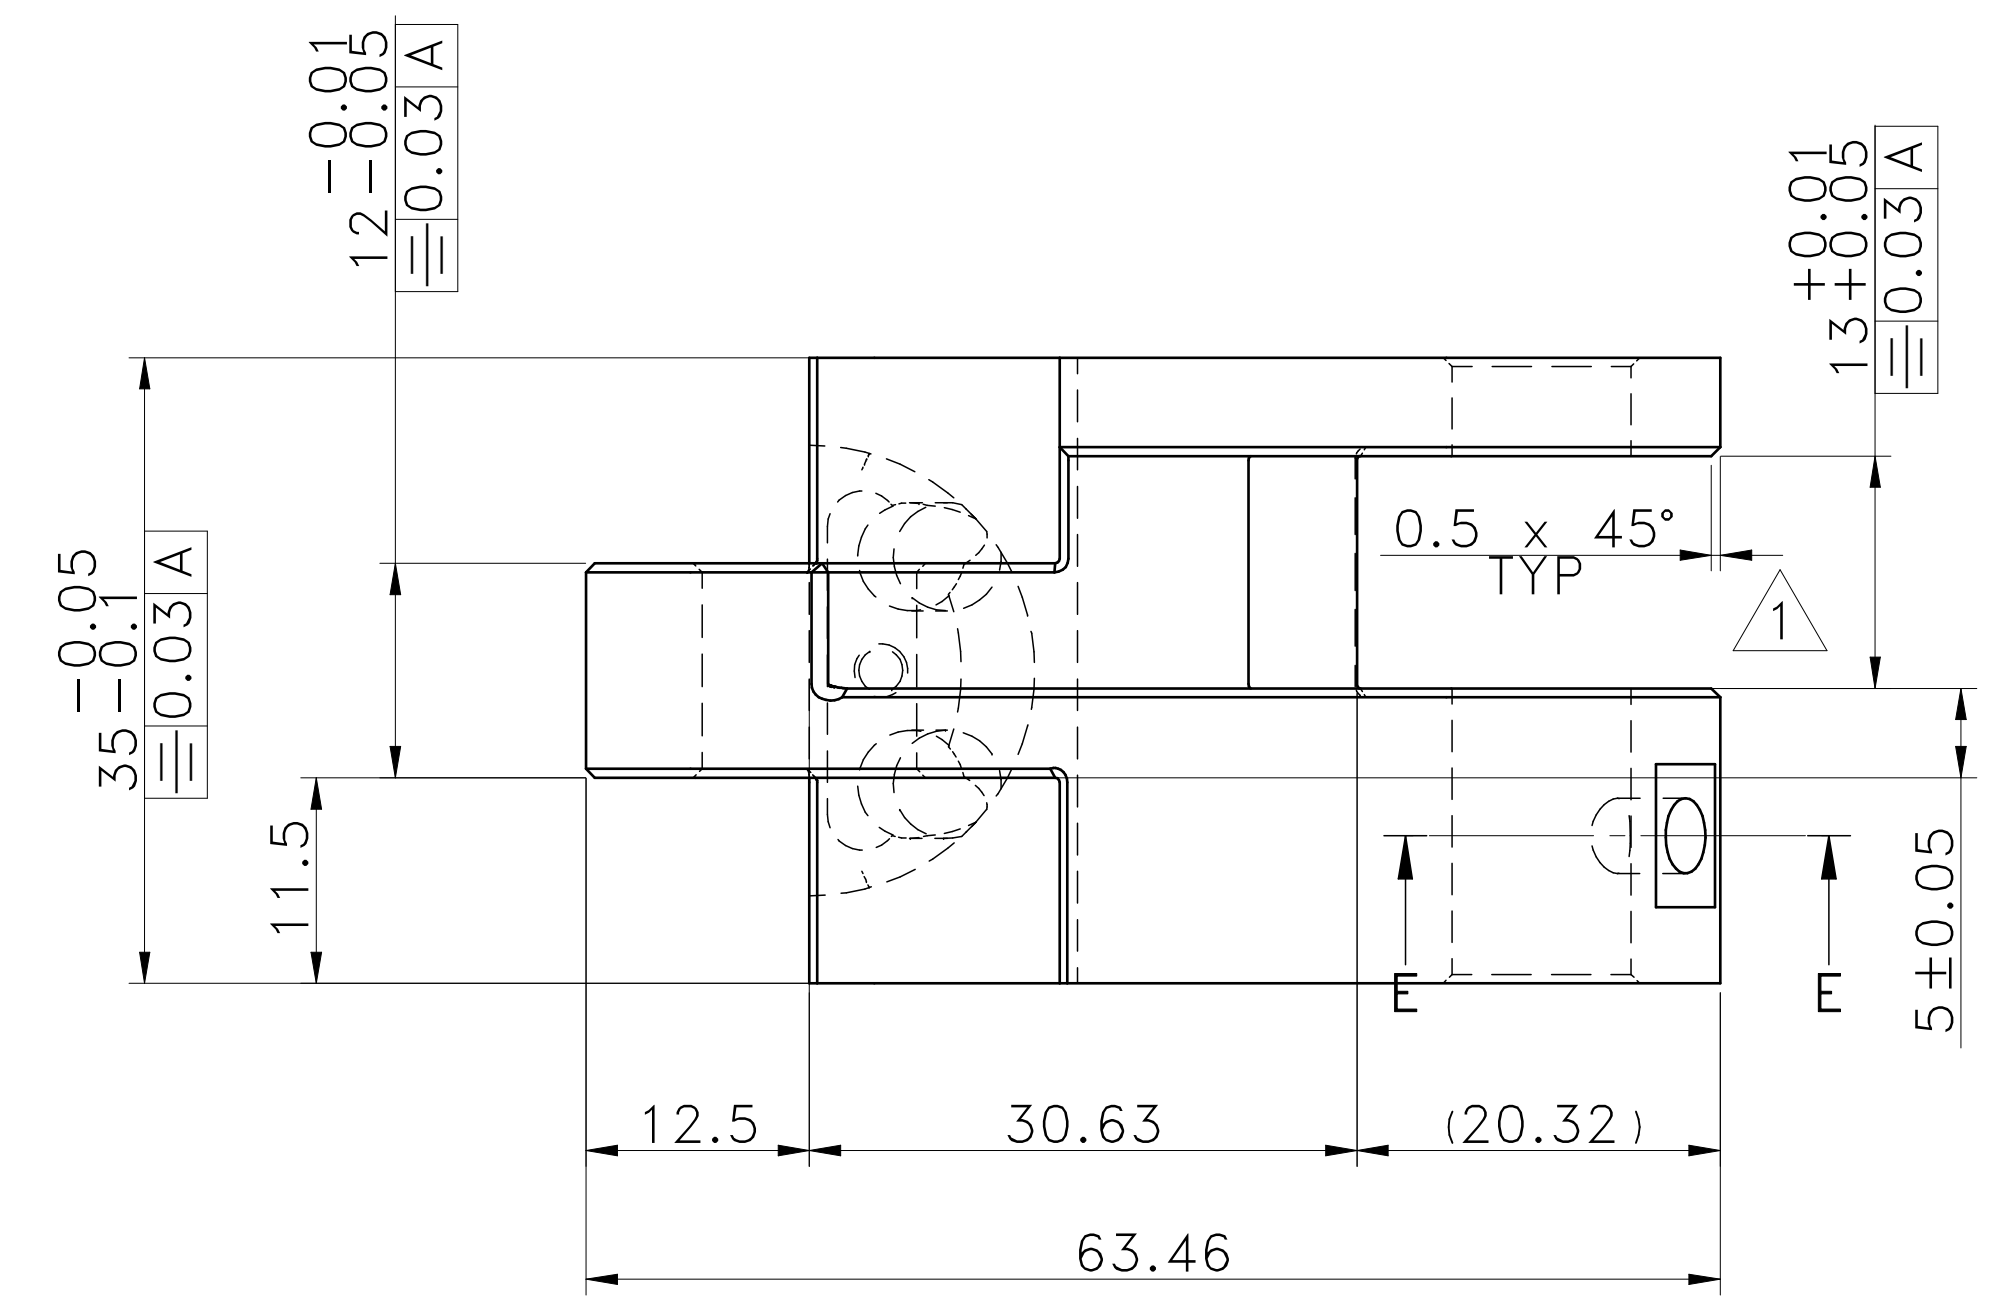

TOP VIEW
SCALE/ECHELLE 2:1

T + S NOTE :

H.T.PROCESS : REFER NOTE
HARDNESS & DEPTH : REFER NOTE
FINISH & DEPTH : REFER NOTE
TEST COUPON SIZE : Ø42 (20mmLENGTH − 01NOS)
WELD CLASS : B IF APPLICABLE

MTC REPORT REQURIED
NON DESTRUCTIVE TESTING (IF APPLICABLE)

RAW MATERIAL	HEAT TREATMENT	FINISH COMPOMENT
UT	DP+UT	MPI

HEAT TREATMENT :−
1. SURFACE HARDNESS UPTO 50~55 HRC. DEPTH 0.2~0.3MM
2. CORE HARDNESS UPTO 40 HRC.
3. RETAPPING TO BE DONE AFTER SURFACE TREATMENTAT SUPPLIER END.(IF APPLICABLE)

NOTE :−
TO BE CNC MACHINED AS PER 3D DATA.

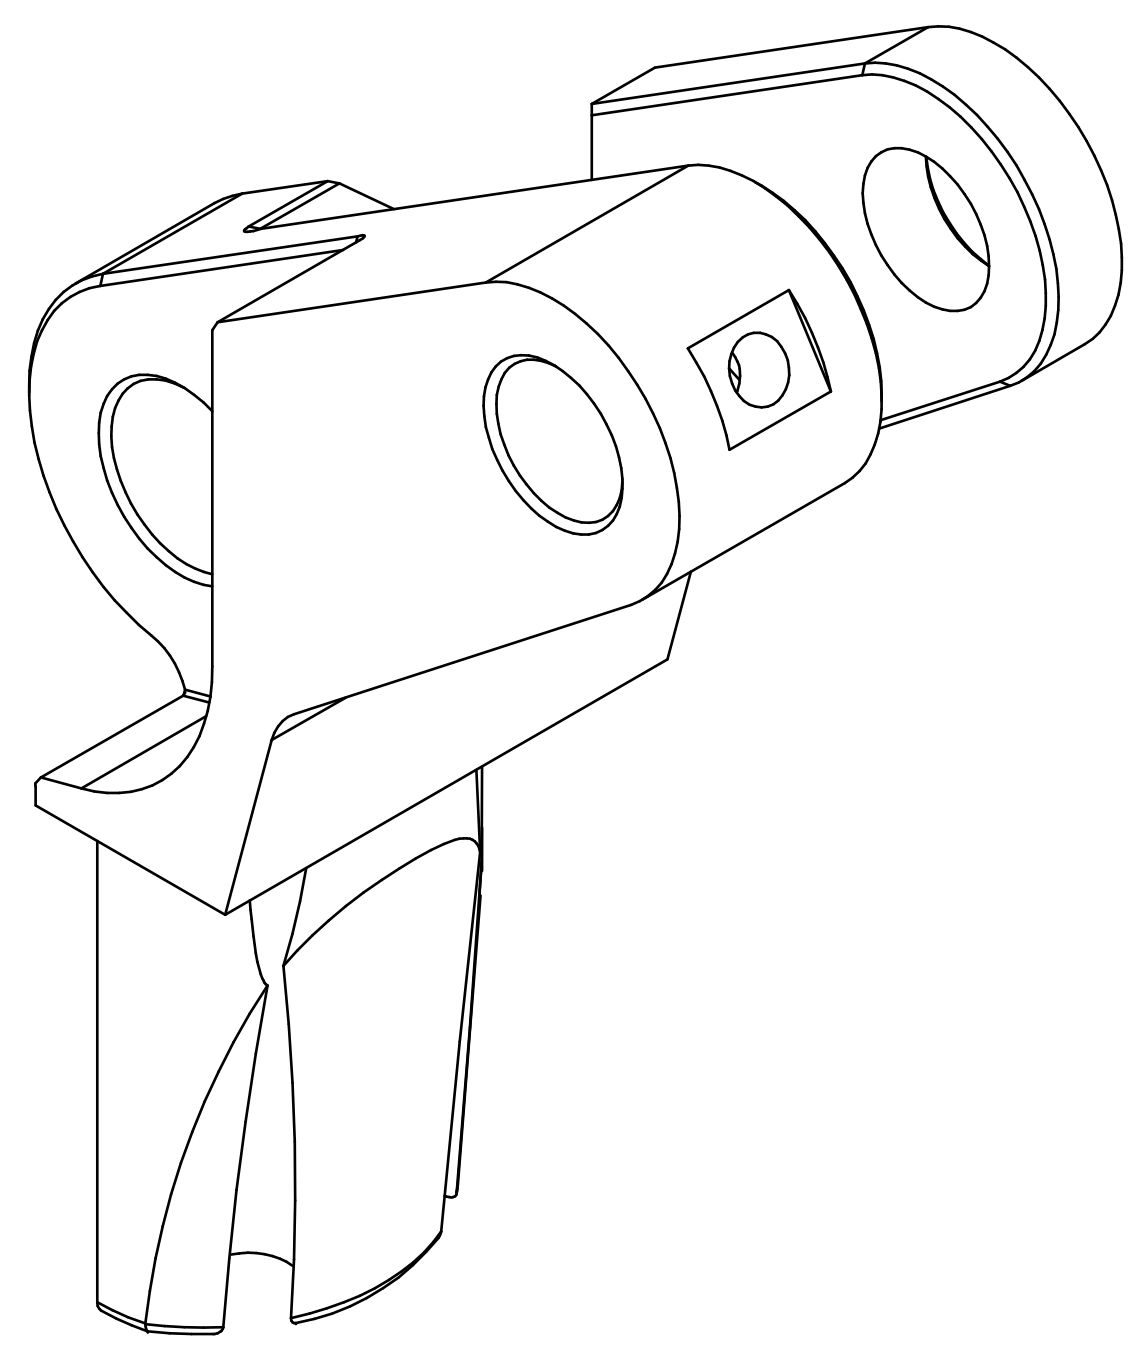

ISO VIEW
SCALE/ECHELLE 2:1

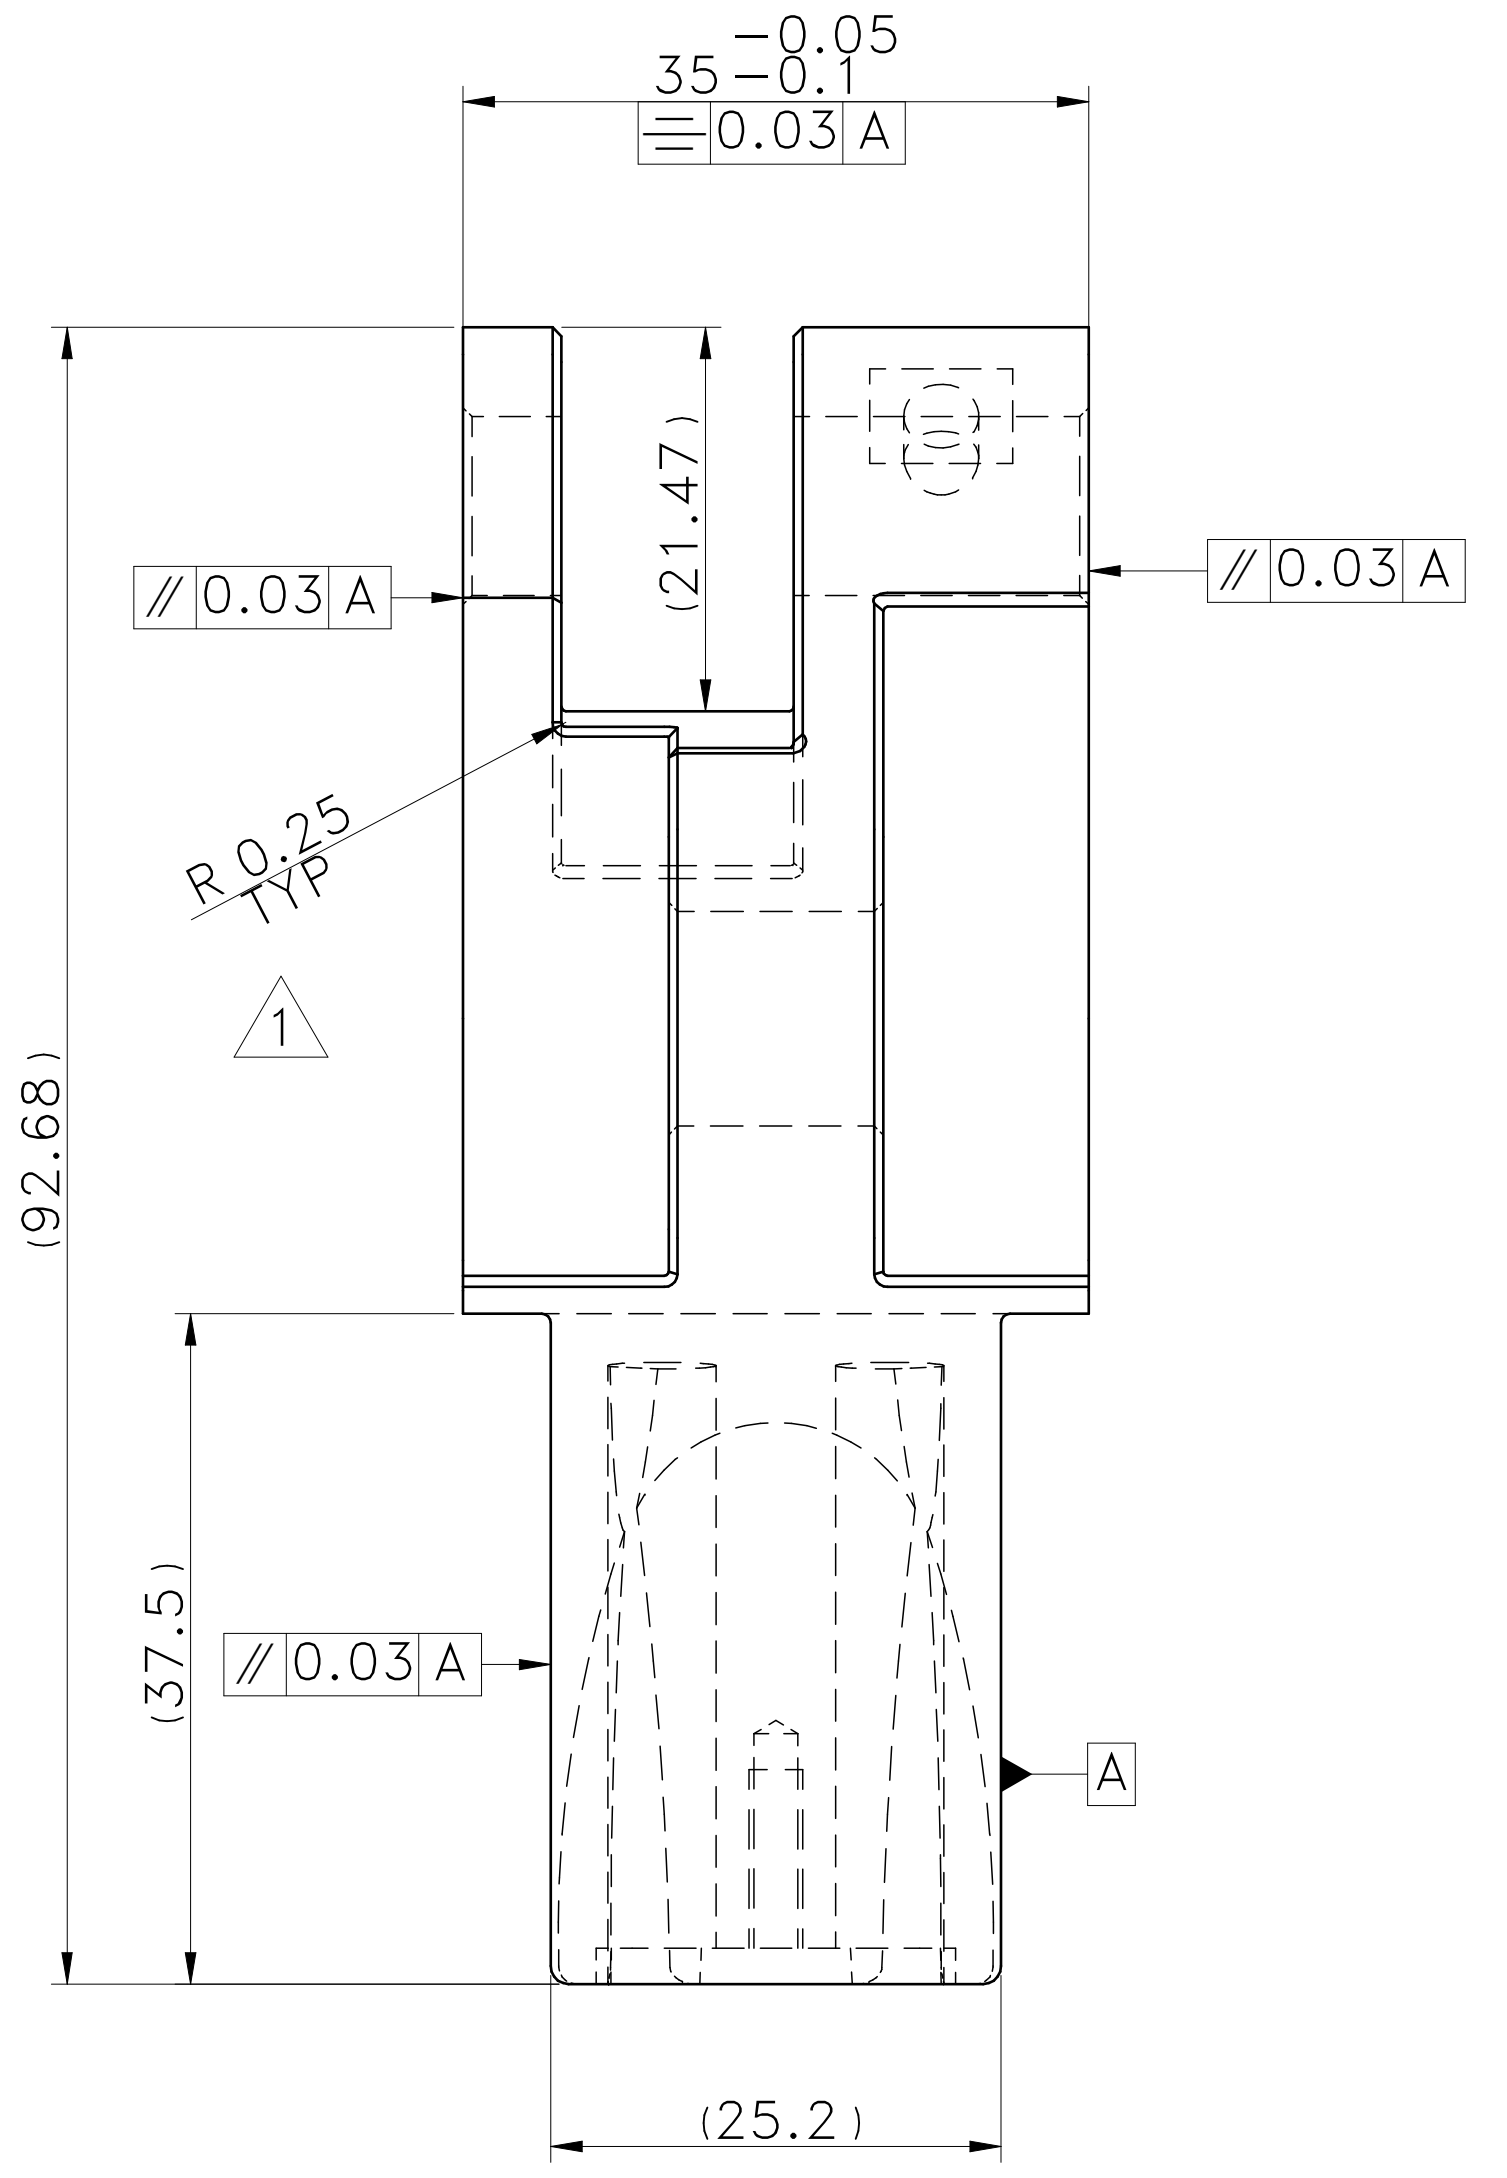

VIEW C
SCALE/ECHELLE 2:1

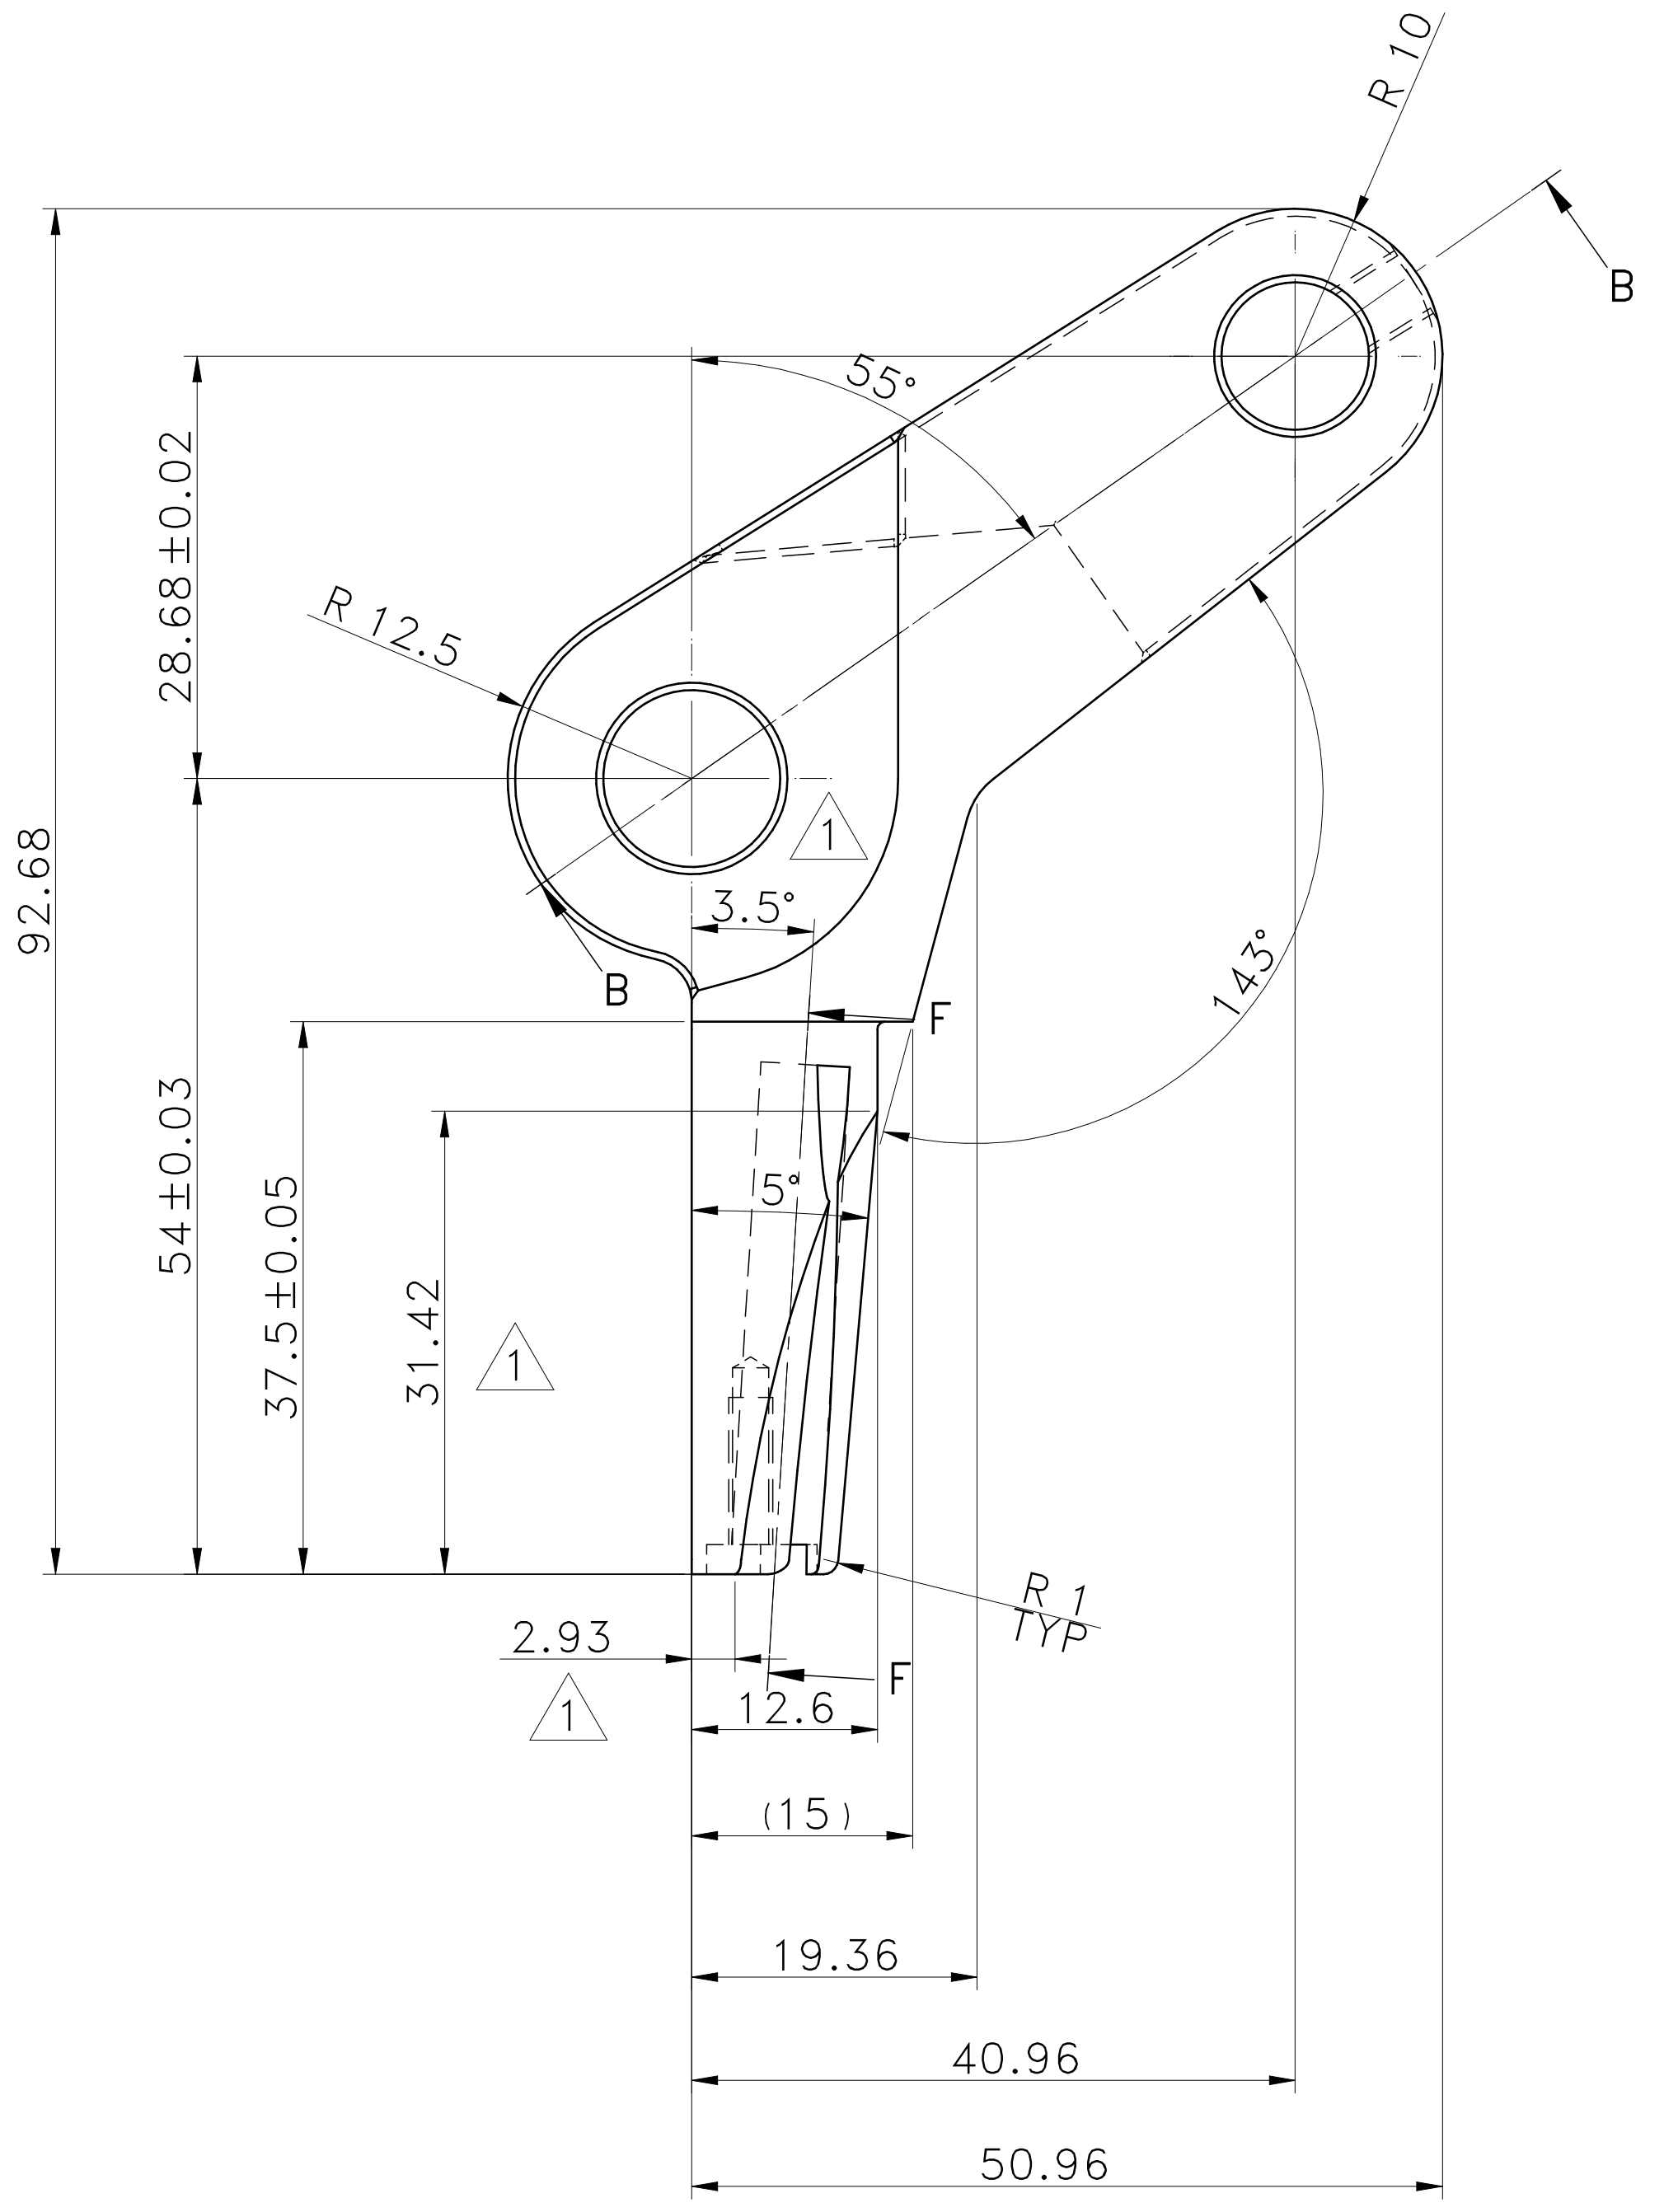

FRONT VIEW
SCALE/ECHELLE 2:1

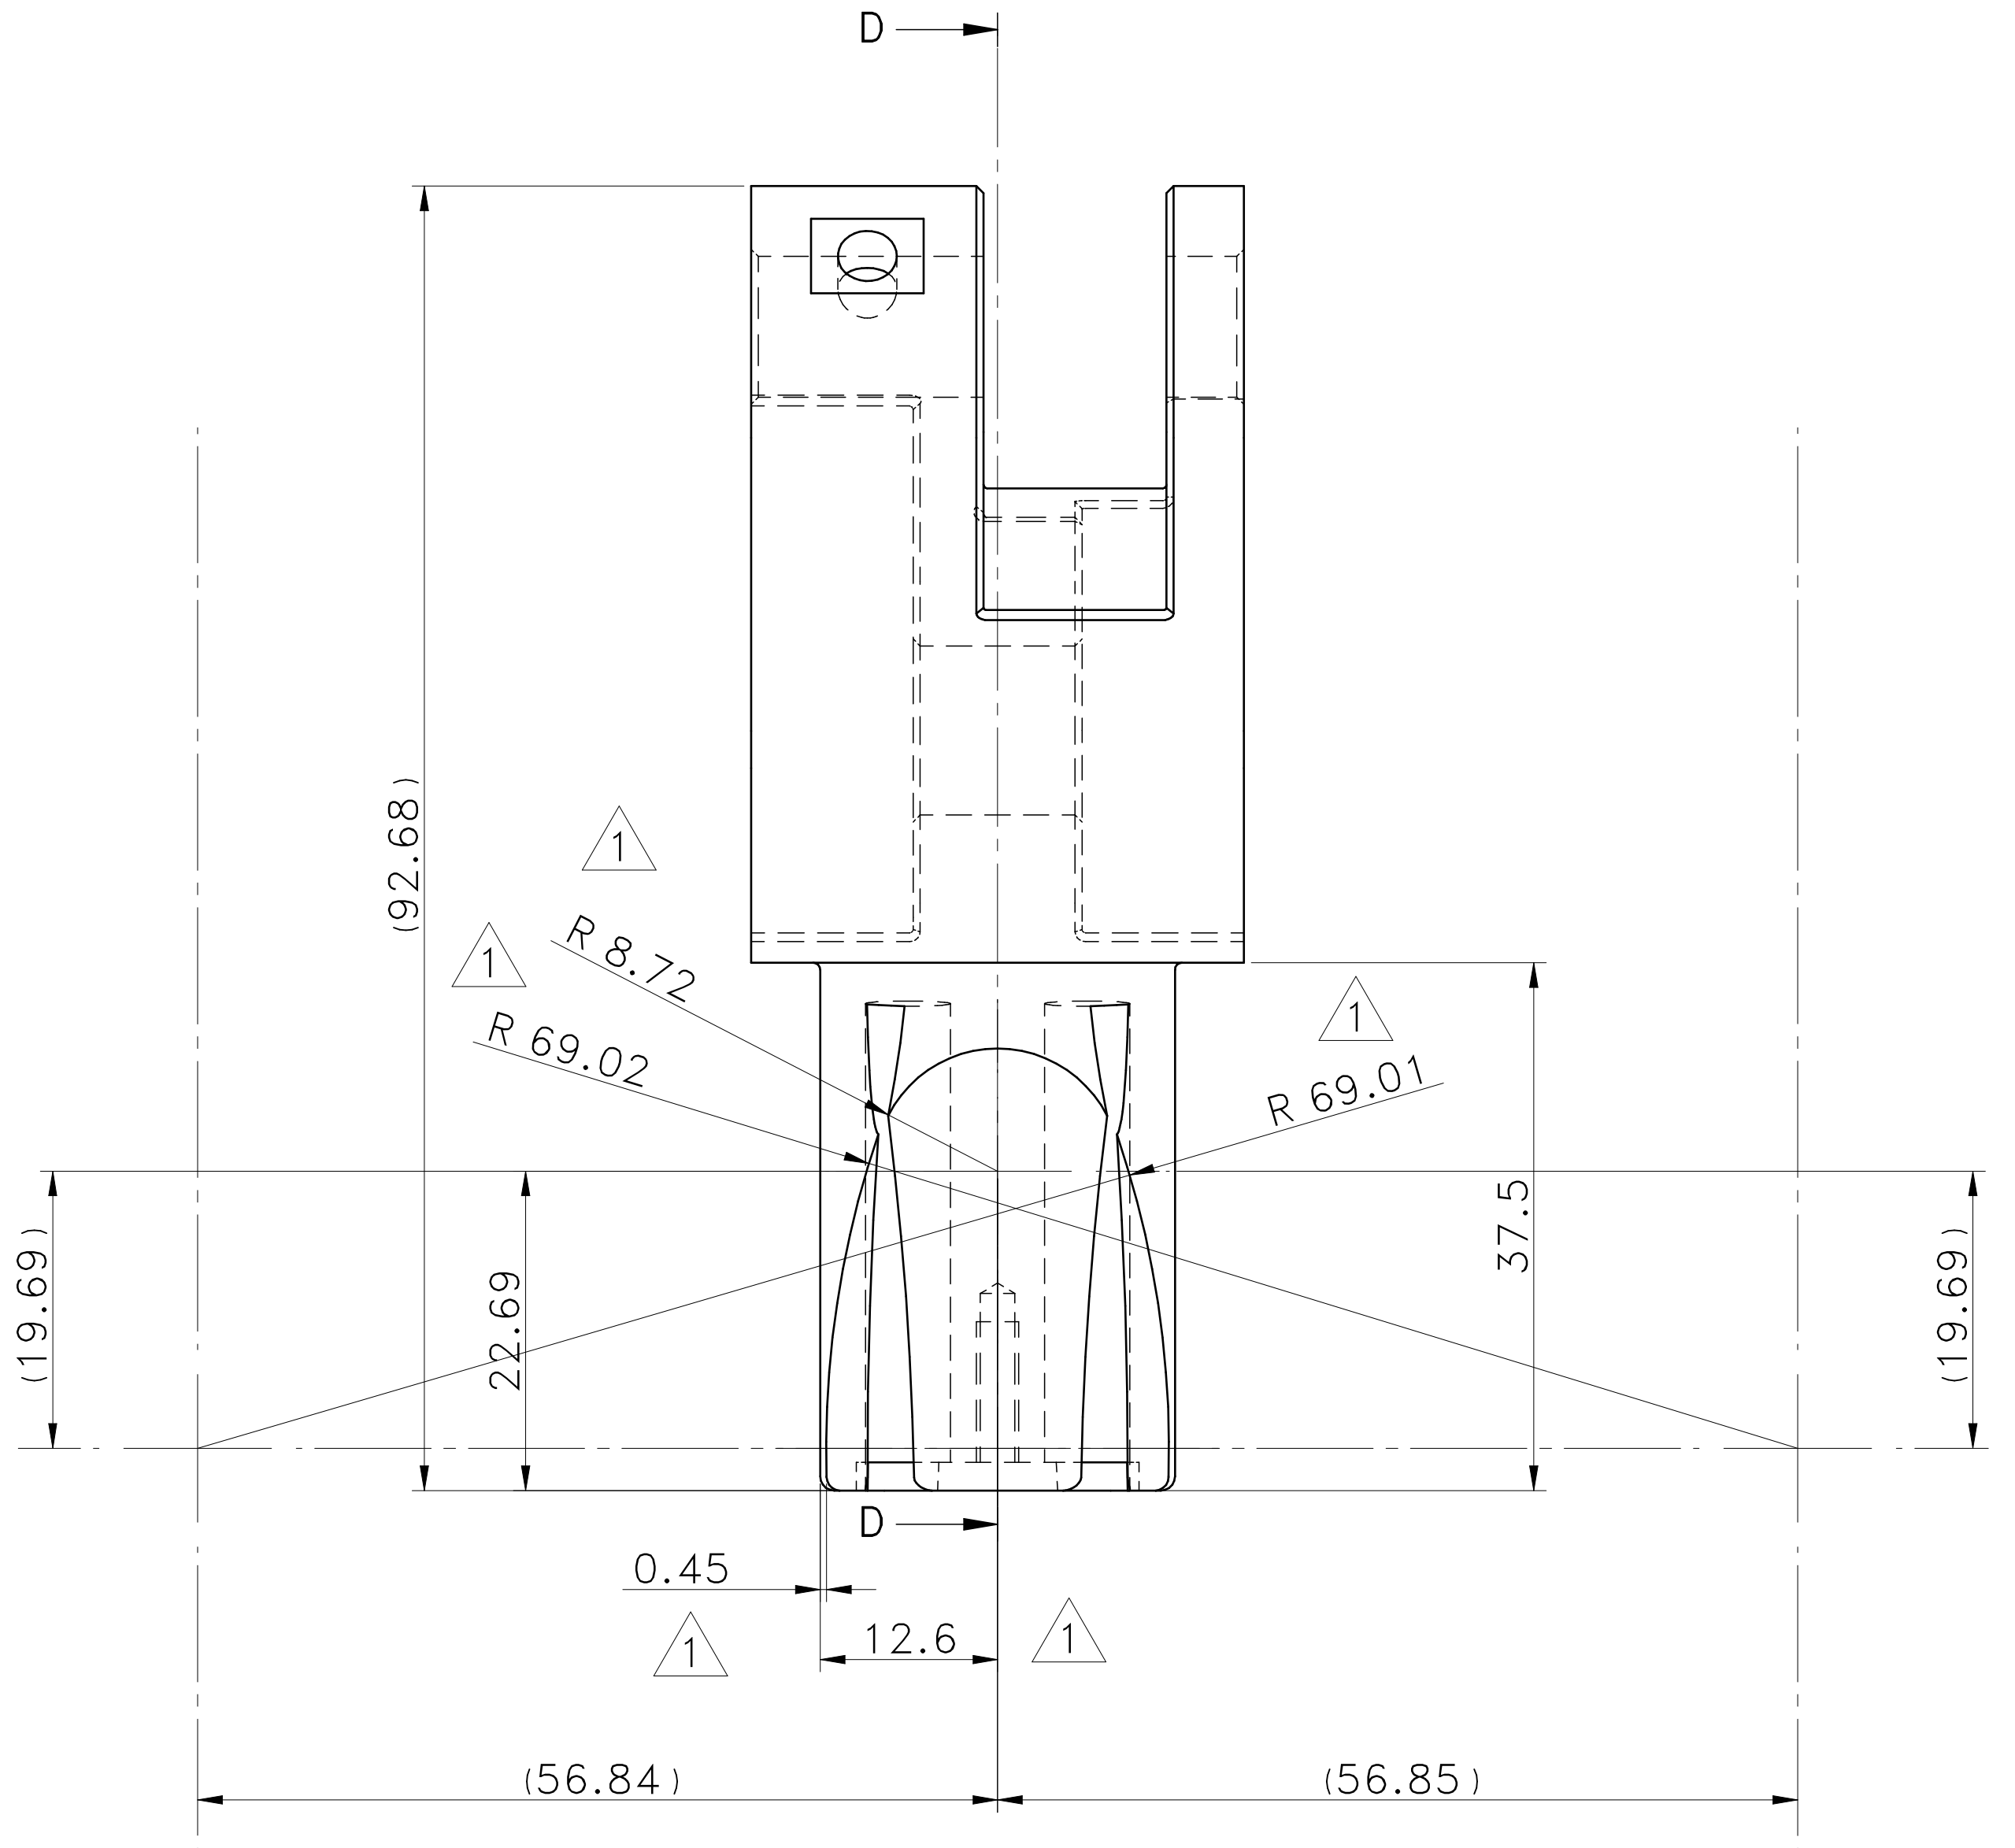

SIDE VIEW
SCALE/ECHELLE 2:1

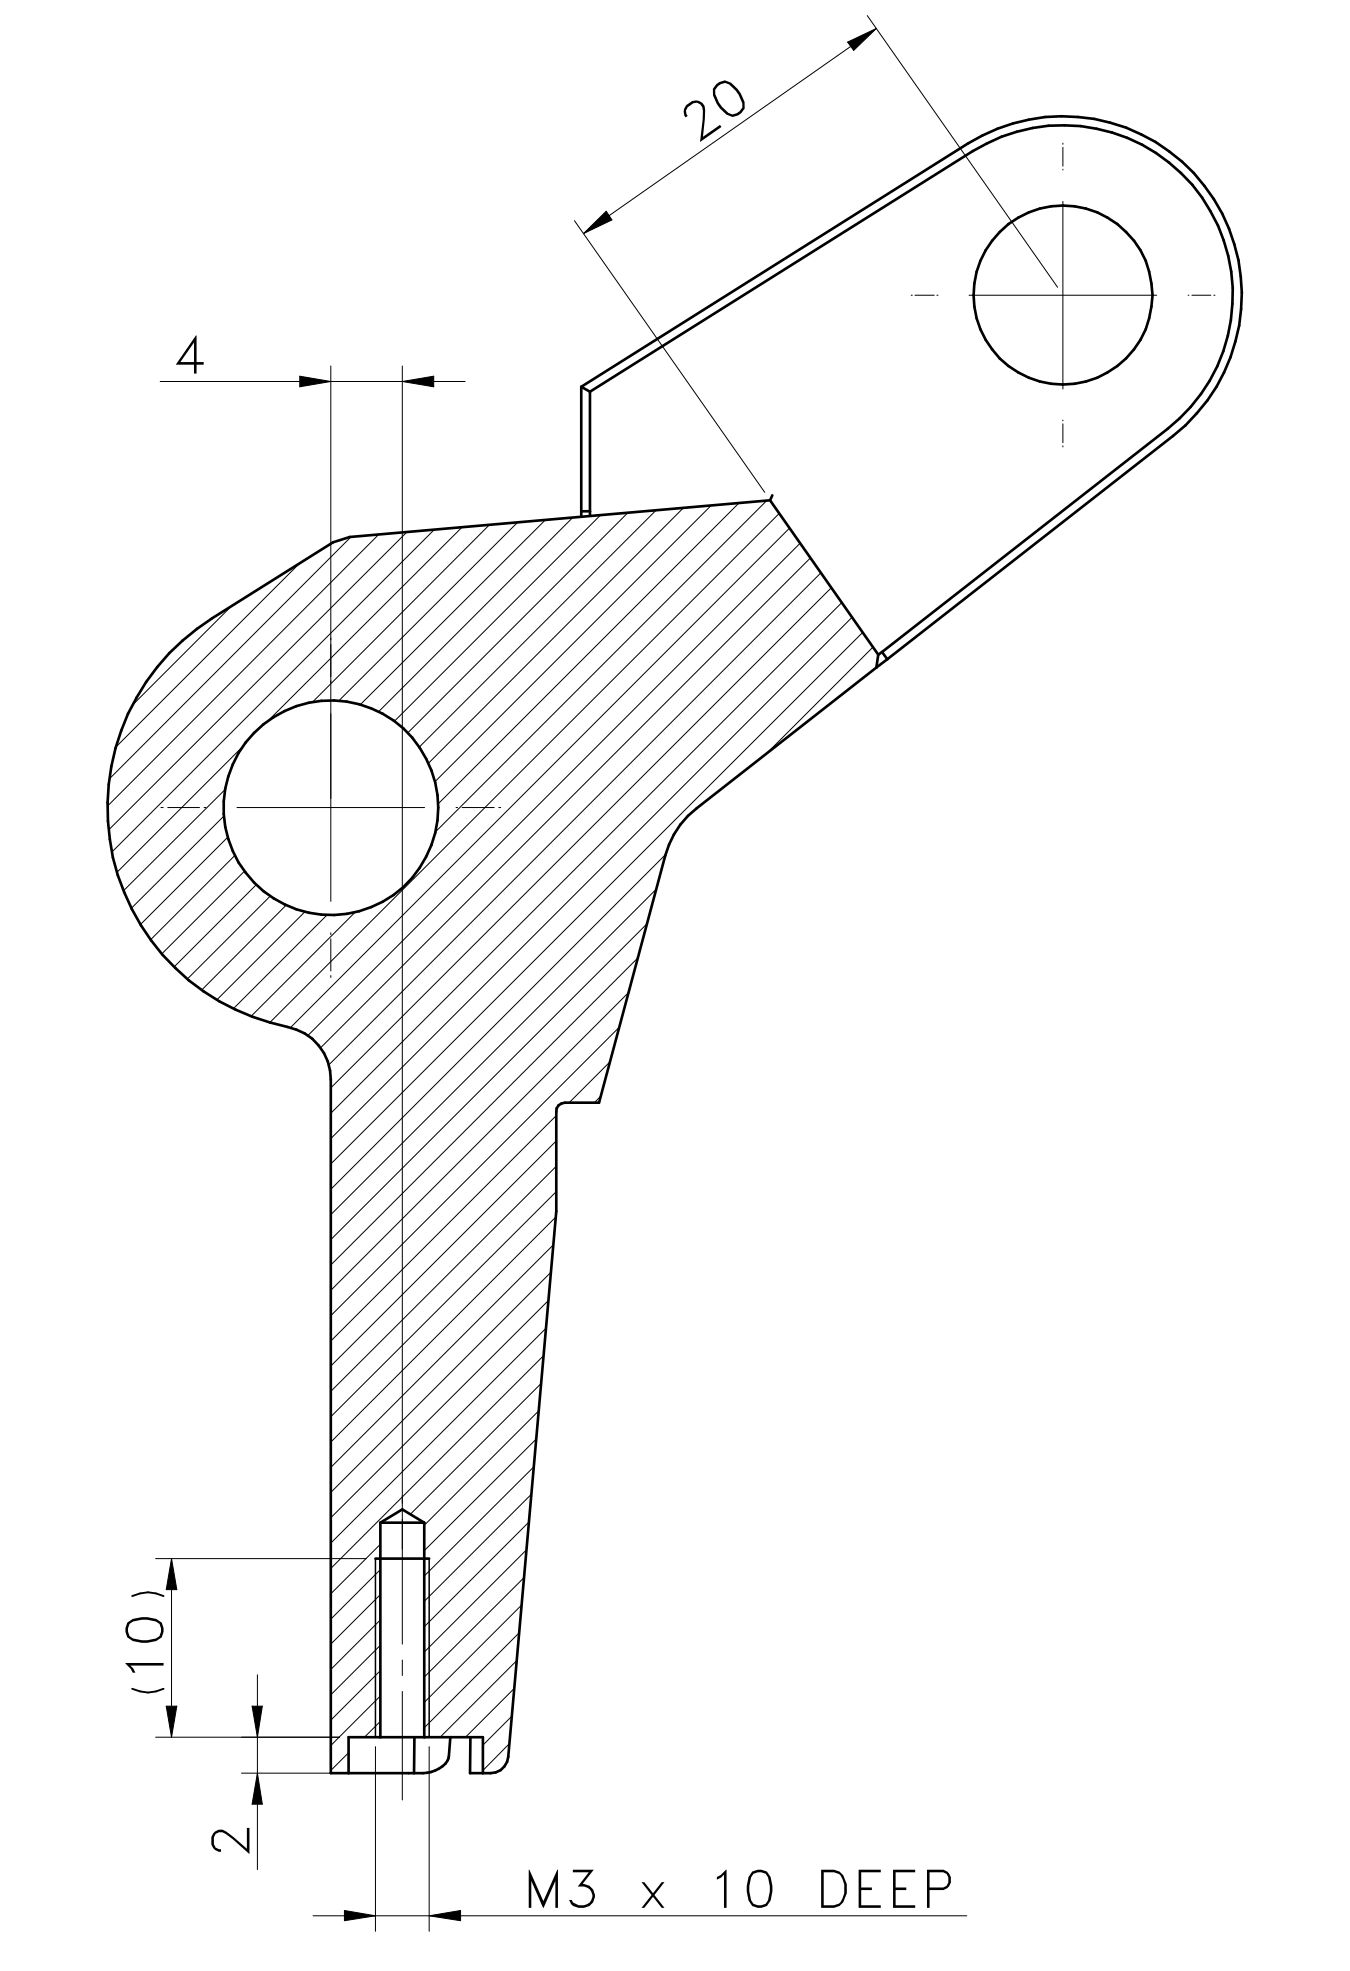

SECTION D−D
SCALE/ECHELLE 2:1

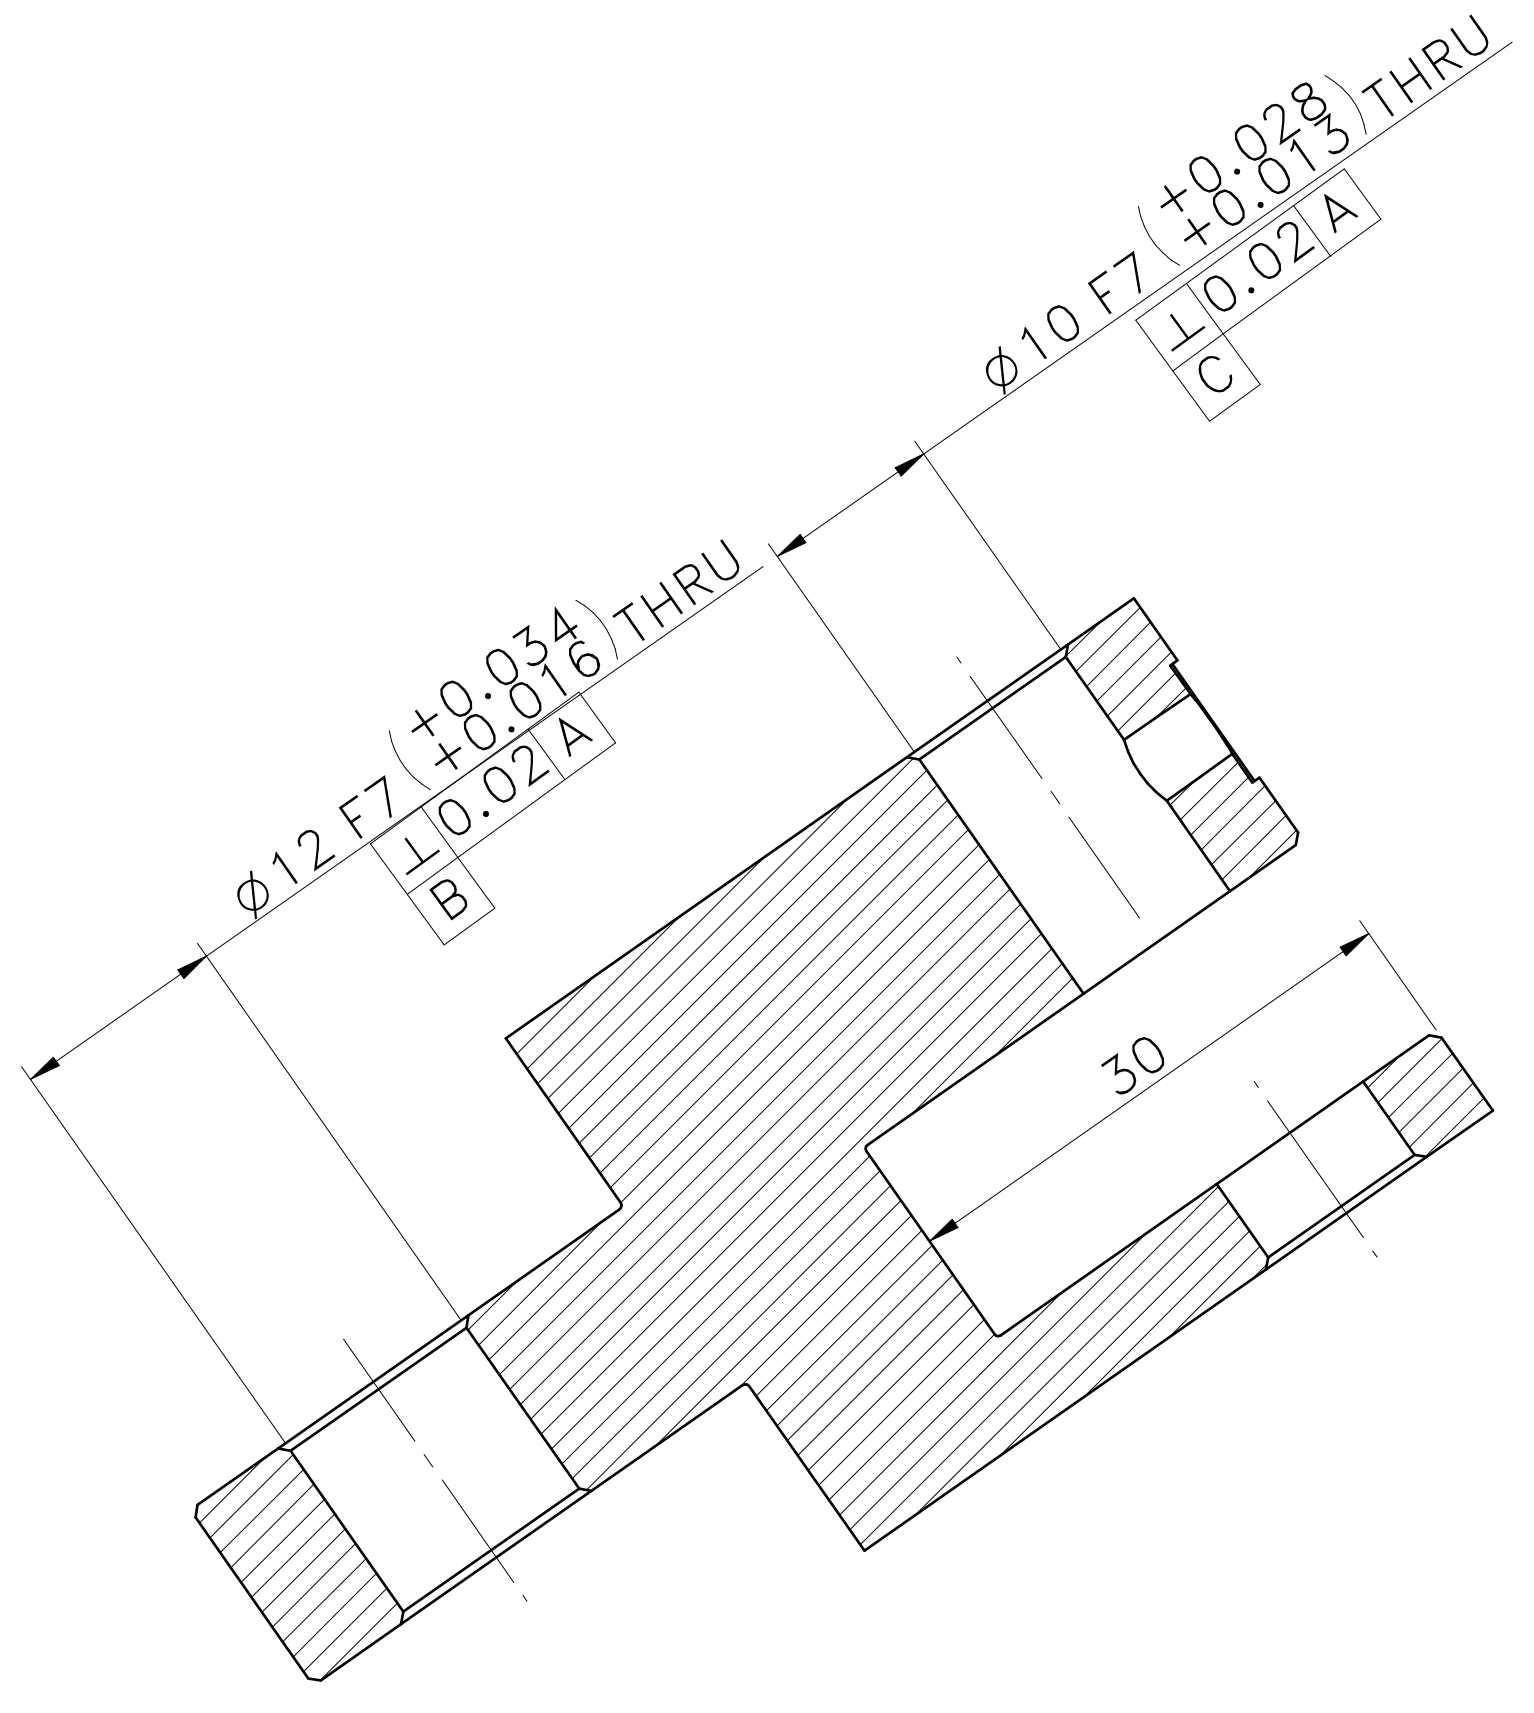

SECTION B−B
SCALE/ECHELLE 2:1

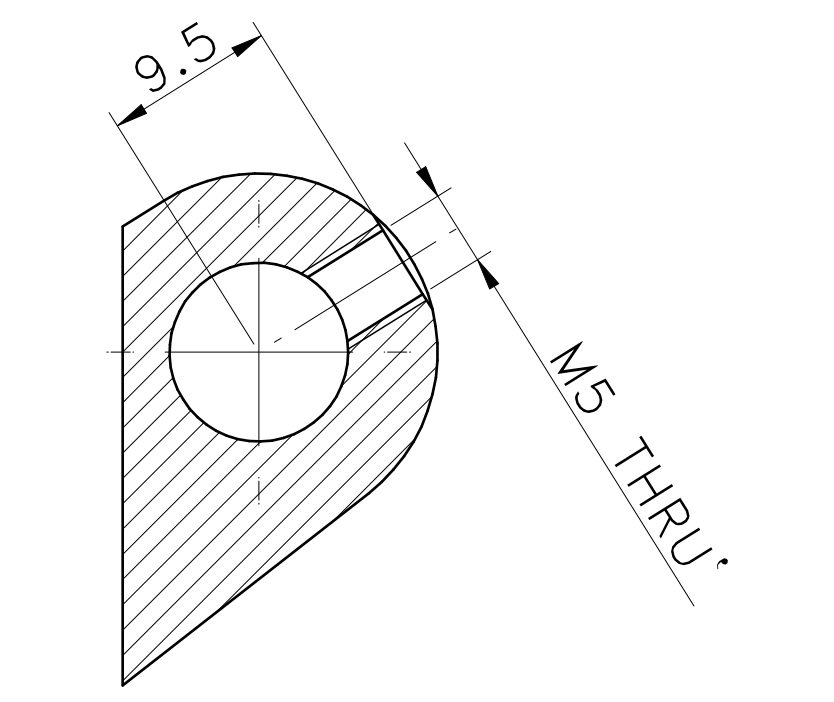

SECTION E−E
SCALE/ECHELLE 2:1

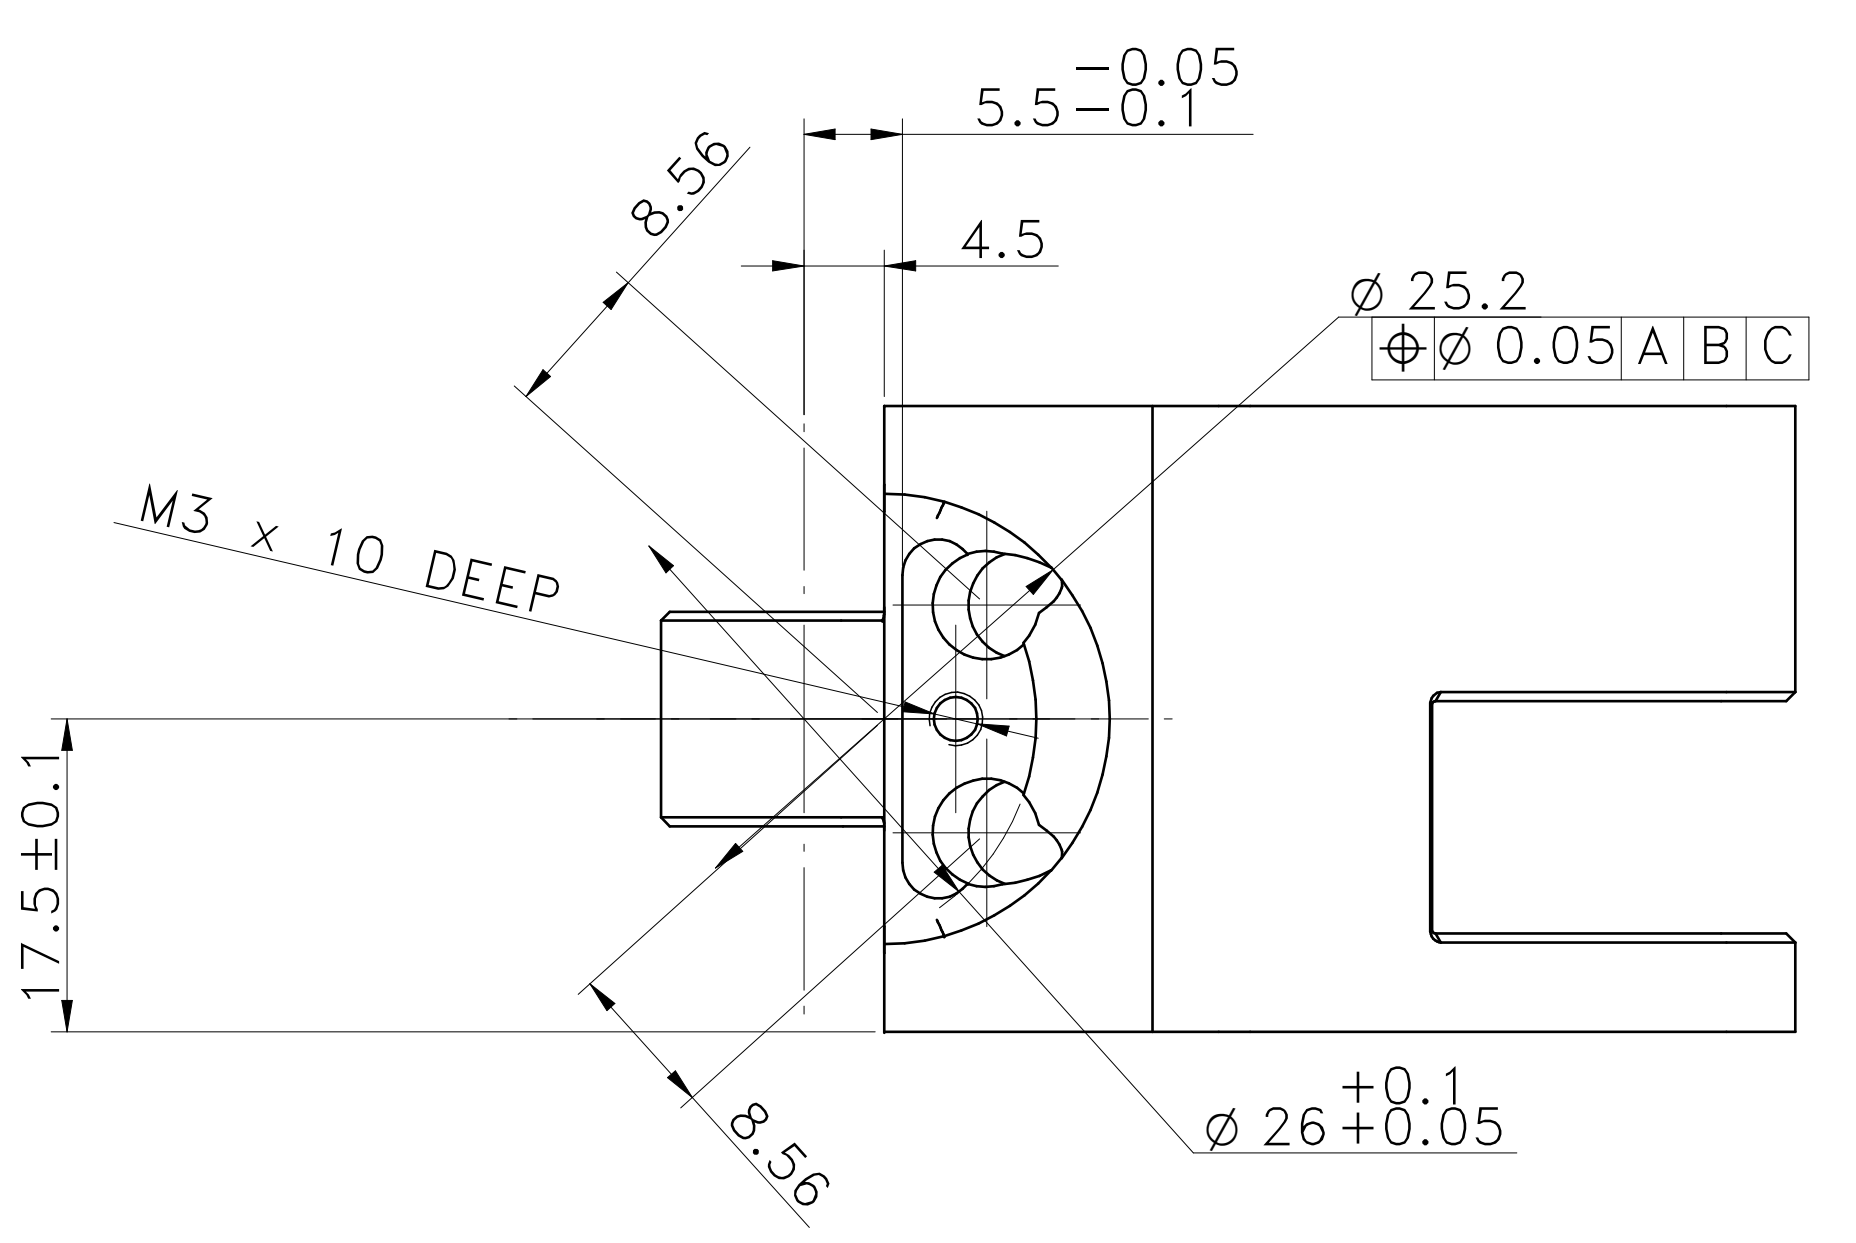

VIEW A / BOTTOM VIEW
SCALE/ECHELLE 2:1

NOTE : (English) 1 1
MATERIAL: EN−24
FINISH: QPQ
MACHINING: 3.2(0.8)
WEIGHT(Kg): 0.29 kg

NOTE :−(French)
MATÉRIEL : EN−24
FINITION : QPQ
MACHINES : 3.2(0.8)
POIDS (Kg): 0.29 kg

NOTE :−(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :−(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : MW

RESERVED SPACE
FOR

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY
	.	.	.
1	MATL & FINISH CHANGED FROM 20MnCr5 & IZBP TO EN24 & QPQ, ALSO HEAT TRARTMENT NOTE CHANGED. RADIUS (R.025), CHAMFER 0.5X45º & MISSING DIMENSIONS ADDED	02/09/2024	03006598

WIPRO PARI GROUP

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

LOCATION : PUNE

DESCRIPTION
GRIPPER FINGER 1

DRAWING TYPE
MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
21.35 in^2	#	#	WPP	0100	PL-02	A0

REFERENCE DWG P2207-0121-14-038_A
PART CLASS.T+S
HEAT TREATMENT ---

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006598	5489	03002882	#	P23Y5B154538	01	2 : 1
03/09/2024	03/09/2024	03/09/2024	NET WEIGHT-Kg 0.29 kg			SHEET 1 OF 1

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED