

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

HOLE TABLE					HOLE TABLE				
Hole	X	Y	Size	REMARK	Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 6.00 mm THRU'	H7	C.14	−840.00	327.00	M6 THRU'	
A.2	−15.00	−38.50	Ø 6.00 mm THRU'	H7	C.15	−710.00	327.00	M6 THRU'	
A.3	40.00	−38.50	Ø 6.00 mm THRU'	H7	C.16	−580.00	327.00	M6 THRU'	
A.4	−756.50	−26.50	Ø 6.00 mm THRU'	H7	C.17	−450.00	327.00	M6 THRU'	
A.5	−701.50	−26.50	Ø 6.00 mm THRU'	H7	C.18	−320.00	327.00	M6 THRU'	
A.6	−900.00	0.00	Ø 6.00 mm THRU'	H7	C.19	−190.00	327.00	M6 THRU'	
A.7	−680.00	149.50	Ø 6.00 mm THRU'	H7	C.20	−60.00	327.00	M6 THRU'	
A.8	−177.50	149.50	Ø 6.00 mm THRU'	H7	C.21	−583.00	401.50	M6 THRU'	
A.9	−900.00	327.00	Ø 6.00 mm THRU'	H7	C.22	−507.00	401.50	M6 THRU'	
A.10	0.00	327.00	Ø 6.00 mm THRU'	H7	C.23	−871.00	403.50	M6 THRU'	
B.1	−477.50	−108.50	M8 THRU'		C.24	−781.00	403.50	M6 THRU'	
B.2	−417.50	−108.50	M8 THRU'		C.25	−114.00	403.50	M6 THRU'	
B.3	−506.00	−104.50	M8 THRU'		C.26	−24.00	403.50	M6 THRU'	
B.4	−466.00	−104.50	M8 THRU'		C.27	−871.00	428.50	M6 THRU'	
B.5	−997.50	−93.50	M8 THRU'		C.28	−781.00	428.50	M6 THRU'	
B.6	102.50	−93.50	M8 THRU'		C.29	−114.00	428.50	M6 THRU'	
B.7	−756.50	−38.50	M8 THRU'		C.30	−24.00	428.50	M6 THRU'	
B.8	−701.50	−38.50	M8 THRU'		C.31	−583.00	431.50	M6 THRU'	
B.9	−15.00	−26.50	M8 THRU'		C.32	−517.00	431.50	M6 THRU'	
B.10	40.00	−26.50	M8 THRU'		D.1	−847.50	−36.50	Ø 13.00 mm THRU'	
B.11	−997.50	420.50	M8 THRU'		D.2	−447.50	−36.50	Ø 13.00 mm THRU'	
B.12	102.50	420.50	M8 THRU'		D.3	−47.50	−36.50	Ø 13.00 mm THRU'	
B.13	−506.00	431.50	M8 THRU'		D.4	−447.50	113.50	Ø 13.00 mm THRU'	
B.14	−466.00	431.50	M8 THRU'		D.5	−847.50	163.50	Ø 13.00 mm THRU'	
B.15	−477.50	435.50	M8 THRU'		D.6	−47.50	163.50	Ø 13.00 mm THRU'	
B.16	−417.50	435.50	M8 THRU'		D.7	−447.50	213.50	Ø 13.00 mm THRU'	
C.1	−583.00	−104.50	M6 THRU'		D.8	−847.50	363.50	Ø 13.00 mm THRU'	
C.2	−517.00	−104.50	M6 THRU'		D.9	−447.50	363.50	Ø 13.00 mm THRU'	
C.3	−583.00	−74.50	M6 THRU'		D.10	−47.50	363.50	Ø 13.00 mm THRU'	
C.4	−507.00	−74.50	M6 THRU'		E.1	−710.00	149.50	M5 THRU'	
C.5	−840.00	0.00	M6 THRU'		E.2	−597.50	149.50	M5 THRU'	
C.6	−710.00	0.00	M6 THRU'		E.3	−485.00	149.50	M5 THRU'	
C.7	−580.00	0.00	M6 THRU'		E.4	−372.50	149.50	M5 THRU'	
C.8	−450.00	0.00	M6 THRU'		E.5	−260.00	149.50	M5 THRU'	
C.9	−320.00	0.00	M6 THRU'		E.6	−147.50	149.50	M5 THRU'	
C.10	−190.00	0.00	M6 THRU'						
C.11	−60.00	0.00	M6 THRU'						
C.12	−992.50	138.50	M6 THRU'						
C.13	−992.50	168.50	M6 THRU'						

TOLERANCE NOTE :-
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN±0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN ±0.2.

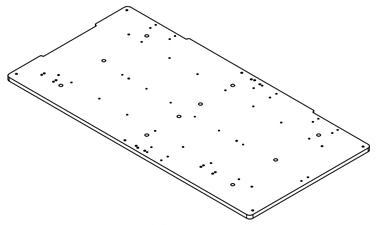

SCALE/ÉCHELLE 1:10

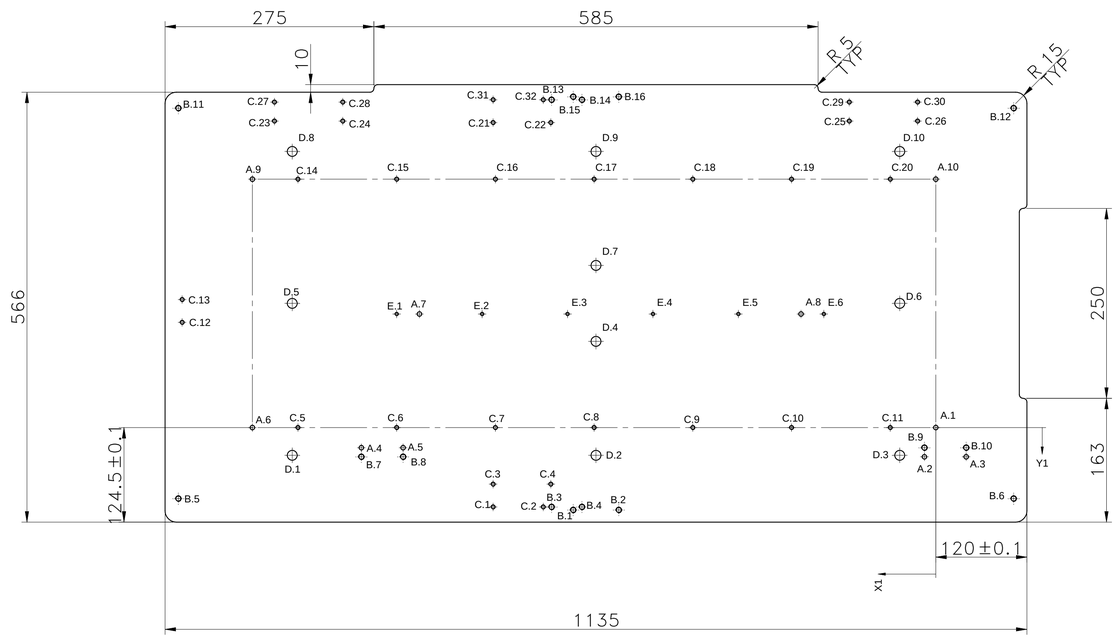

SCALE/ÉCHELLE 1:4



SCALE/ÉCHELLE 1:4

NOTE :-(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :-(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE : (English)
MATERIAL: M.S.
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2
WEIGHT(Kg): 75.20 kg

NOTE :-(French)
MATÉRIEL : M.S.
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2
POIDS (Kg): 75.20 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

RESERVED SPACE FOR CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP RADII	UNSP CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm	
UP TO 10	±1'
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY
.	.	.	.
.	.	.	.

WIPRO PARI GROUP

www.wipropari.com

DESCRIPTION: BASE PLATE

DRAWING TYPE: MACHINING

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
2106.39 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG.	----	PART CLASS. B	HEAT TREATMENT	---

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006751	03004785	03002882	#	P23Y5B156002	00	1 : 4
26/04/2024	26/04/2024	26/04/2024	NET WEIGHT-Kg 75.20 kg			SHEET 1 OF 1

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\sr-01043\E:\OM Uploading\2022--23\P23Y5\P23Y5B156002.dft