


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

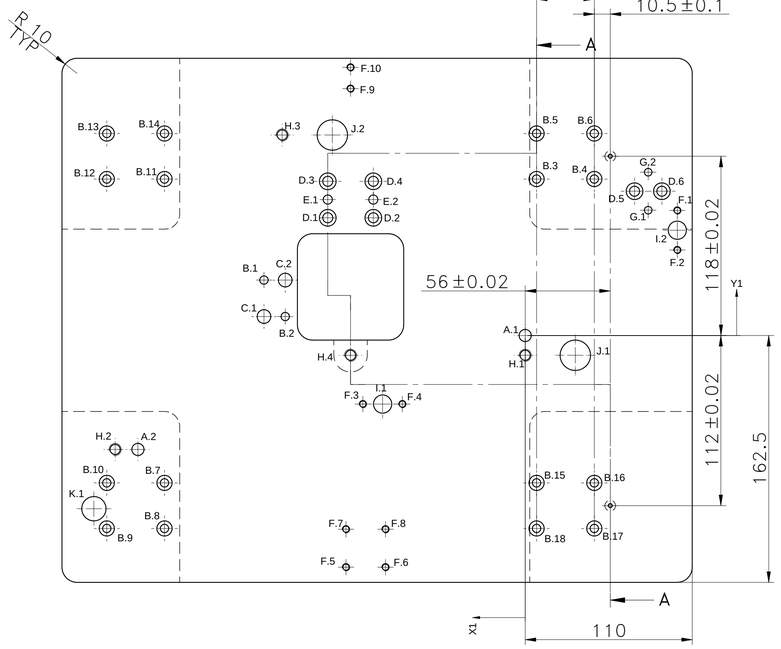


SCALE/ÉCHELLE 1:2



SCALE/ÉCHELLE 1:2

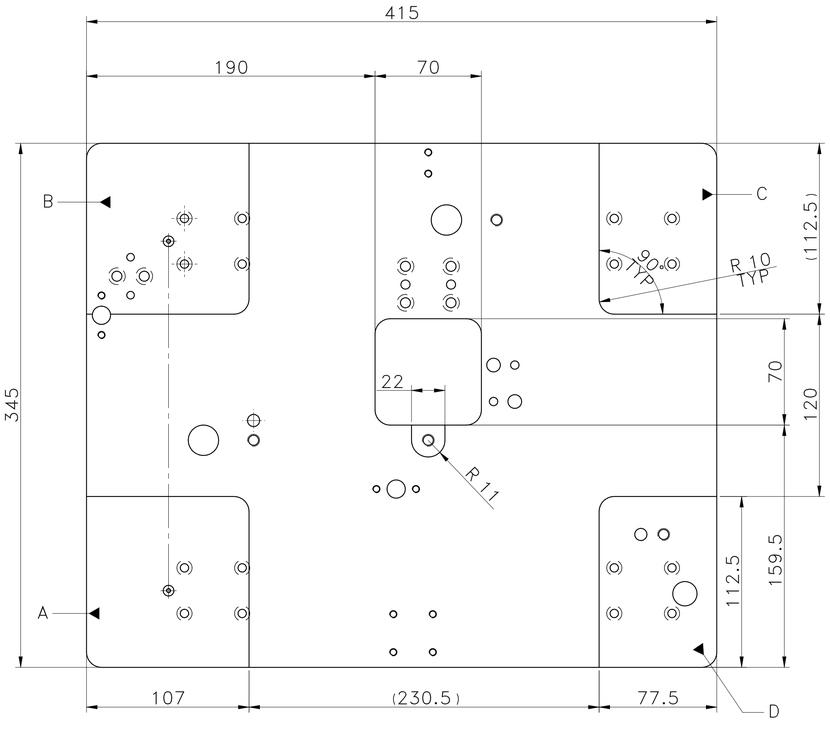

SCALE/ÉCHELLE 1:2

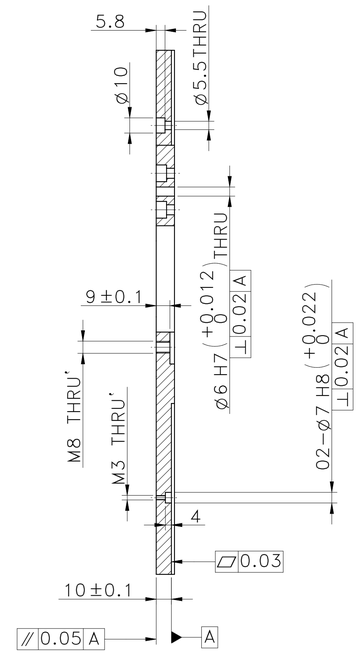

SECTION A–A
SCALE/ÉCHELLE 1:2

NOTE :–
CO PLANERITY OF SURFACE A ,B, C & D SHOULD BE WITHIN 0.05

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

NOTE : USE THREADED INSERTS FOR ALL TAPPING HOLE.

NOTE : (English)
MATERIAL: Aluminum, 7075–T6
FINISH: SELF–ANODIZING
MACHINING: 3.2
WEIGHT(Kg): 4.31 kg

NOTE :–(French)
MATÉRIEL : Aluminum, 7075–T6
FINITION : SELF–ANODIZING
MACHINES : 3.2
POIDS (Kg): 4.31 kg

RESERVED SPACE FOR COPY

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm	
UP TO 10	±1'
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

WIPRO PARI GROUP

DESCRIPTION: BASE PLATE
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
476.26 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG.	NA	PART CLASS. B	HEAT TREATMENT	NA

LOCATION : PUNE	DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
	9265	03004785	03002882	#	P23Y5B156030	00	1 : 2
	26/04/2024	26/04/2024	26/04/2024	NET WEIGHT-Kg 4.31 kg			SHEET 1 OF 2

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01043\Cv2\DM Uploading\2022-23\P2375\P23Y5B156030.dft

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

HOLE TABLE

Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 8.00 mm THRU'	H7
A.2	−255.00	−75.00	Ø 8.00 mm THRU'	H7
B.1	−172.00	36.50	Ø 5.50 mm THRU'	REF.SEC A−A
B.2	−158.00	12.50	Ø 5.50 mm THRU'	REF.SEC A−A
B.3	7.50	103.00	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm − 5.80 mm DEEP	REF.SEC A−A
B.4	45.50	103.00	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm − 5.80 mm DEEP	REF.SEC A−A
B.5	7.50	133.00	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm − 5.80 mm DEEP	REF.SEC A−A
B.6	45.50	133.00	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm − 5.80 mm DEEP	REF.SEC A−A
B.7	−237.50	−97.00	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm − 5.80 mm DEEP	REF.SEC A−A
B.8	−237.50	−127.00	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm − 5.80 mm DEEP	REF.SEC A−A
B.9	−275.50	−127.00	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm − 5.80 mm DEEP	REF.SEC A−A
B.10	−275.50	−97.00	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm − 5.80 mm DEEP	REF.SEC A−A
B.11	−237.50	103.00	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm − 5.80 mm DEEP	REF.SEC A−A
B.12	−275.50	103.00	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm − 5.80 mm DEEP	REF.SEC A−A
B.13	−275.50	133.00	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm − 5.80 mm DEEP	REF.SEC A−A
B.14	−237.50	133.00	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm − 5.80 mm DEEP	REF.SEC A−A
B.15	7.50	−97.00	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm − 5.80 mm DEEP	REF.SEC A−A
B.16	45.50	−97.00	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm − 5.80 mm DEEP	REF.SEC A−A
B.17	45.50	−127.00	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm − 5.80 mm DEEP	REF.SEC A−A
B.18	7.50	−127.00	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm − 5.80 mm DEEP	REF.SEC A−A
C.1	−172.00	12.50	Ø 9.00 mm THRU'	
C.2	−158.00	36.50	Ø 9.00 mm THRU'	
D.1	−130.00	77.50	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm − 6.80 mm DEEP	
D.2	−100.00	77.50	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm − 6.80 mm DEEP	

HOLE TABLE

Hole	X	Y	Size	REMARK
D.3	−130.00	101.50	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm − 6.80 mm DEEP	
D.4	−100.00	101.50	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm − 6.80 mm DEEP	
D.5	72.00	95.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm − 6.80 mm DEEP	
D.6	90.00	95.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm − 6.80 mm DEEP	
E.1	−130.00	89.50	Ø 6.00 mm THRU'	H7 REF.SEC A−A
E.2	−100.00	89.50	Ø 6.00 mm THRU'	H7 REF.SEC A−A
F.1	100.16	82.30	M5 THRU'	
F.2	100.16	56.30	M5 THRU'	
F.3	−106.88	−45.13	M5 THRU'	
F.4	−80.88	−45.13	M5 THRU'	
F.5	−118.00	−152.50	M5 THRU'	
F.6	−92.00	−152.50	M5 THRU'	
F.7	−118.00	−127.50	M5 THRU'	
F.8	−92.00	−127.50	M5 THRU'	
F.9	−115.00	162.50	M5 THRU'	
F.10	−115.00	176.50	M5 THRU'	
G.1	81.00	82.50	Ø 5.00 mm THRU'	H7
G.2	81.00	107.50	Ø 5.00 mm THRU'	H7
H.1	0.00	−13.00	M8 THRU'	
H.2	−270.00	−75.00	M8 THRU'	
H.3	−160.00	132.00	M8 THRU'	
H.4	−115.00	−13.00	M8 THRU'	
I.1	−93.88	−45.13	Ø 12.00 mm THRU'	H7
I.2	100.16	69.30	Ø 12.00 mm THRU'	H7
J.1	33.00	−13.00	Ø 20.00 mm THRU'	
J.2	−127.00	132.00	Ø 20.00 mm THRU'	
K.1	−284.00	−114.00	Ø 16.00 mm THRU'	

TOLERANCE NOTE :-
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN±0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN ±0.2.

NOTE : (English)
MATERIAL: Aluminum, 7075−T6
FINISH: SELF−ANODIZING
MACHINING: 3.2
WEIGHT(Kg): 4.31 kg

NOTE :−(French)
MATERIEL : Aluminum, 7075−T6
FINITION : SELF−ANODIZING
MACHINES : 3.2
POIDS (Kg): 4.31 kg

RESERVED SPACE FOR CONTROLLED COPY

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(IFAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(IFAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY

WIPRO PARI GROUP
www.wiropari.com

DESCRIPTION: BASE PLATE
DRAWING TYPE: MACHINING

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
476.26 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. NA | PART CLASS. B | HEAT TREATMENT NA

LOCATION : PUNE

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
9265	03004785	03002882	#	P23Y5B156030	00	1 : 2
26/04/2024	26/04/2024	26/04/2024	NET WEIGHT-Kg 4.31 kg			SHEET 2 OF 2

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01043\Ec-DM Uploading\2022-23\P23Y5\P23Y5B156030.dft