


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00/FR-DES-006-00

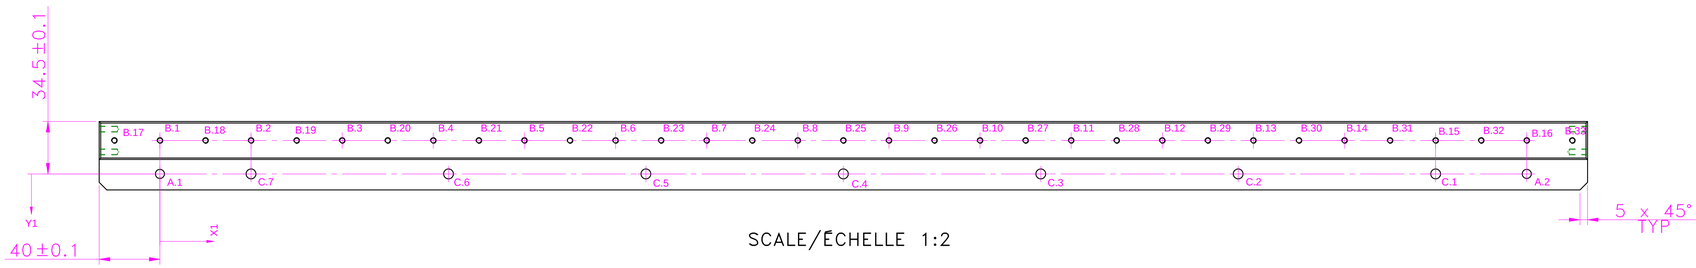


SCALE/ÉCHELLE 1:2

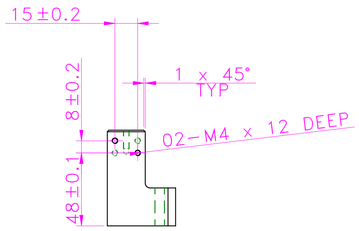

SCALE/ÉCHELLE 1:2

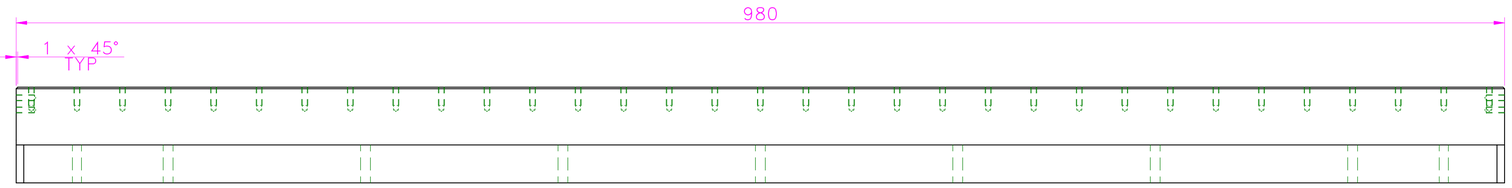

SCALE/ÉCHELLE 1:2

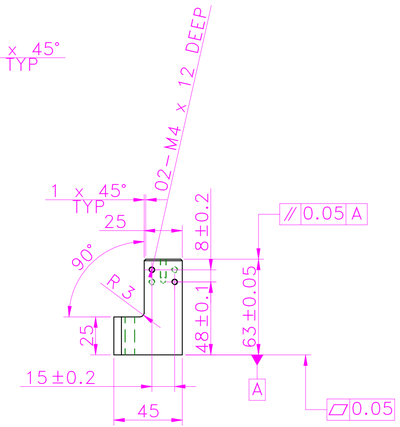


SCALE/ÉCHELLE 1:2

TOLERANCE NOTE :-
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN±0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D, SHOULD BE CONTROLLED WITHIN ±0.2.

NOTE :-(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :-(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

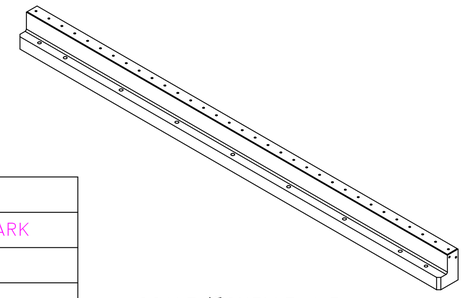

SCALE/ÉCHELLE 1:5

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 6.00 mm THRU'	H7 ⊥ 0.02 A
A.2	900.00	0.00	Ø 6.00 mm THRU'	H7 ⊥ 0.02 A
B.1	0.00	22.00	M4 x 12.00 mm DEEP	
B.2	60.00	22.00	M4 x 12.00 mm DEEP	
B.3	120.00	22.00	M4 x 12.00 mm DEEP	
B.4	180.00	22.00	M4 x 12.00 mm DEEP	
B.5	240.00	22.00	M4 x 12.00 mm DEEP	
B.6	300.00	22.00	M4 x 12.00 mm DEEP	
B.7	360.00	22.00	M4 x 12.00 mm DEEP	
B.8	420.00	22.00	M4 x 12.00 mm DEEP	
B.9	480.00	22.00	M4 x 12.00 mm DEEP	
B.10	540.00	22.00	M4 x 12.00 mm DEEP	
B.11	600.00	22.00	M4 x 12.00 mm DEEP	
B.12	660.00	22.00	M4 x 12.00 mm DEEP	
B.13	720.00	22.00	M4 x 12.00 mm DEEP	
B.14	780.00	22.00	M4 x 12.00 mm DEEP	
B.15	840.00	22.00	M4 x 12.00 mm DEEP	
B.16	900.00	22.00	M4 x 12.00 mm DEEP	
B.17	−30.00	22.00	M4 x 12.00 mm DEEP	1

HOLE TABLE				
Hole	X	Y	Size	REMARK
B.18	30.00	22.00	M4 x 12.00 mm DEEP	1
B.19	90.00	22.00	M4 x 12.00 mm DEEP	1
B.20	150.00	22.00	M4 x 12.00 mm DEEP	1
B.21	210.00	22.00	M4 x 12.00 mm DEEP	1
B.22	270.00	22.00	M4 x 12.00 mm DEEP	1
B.23	330.00	22.00	M4 x 12.00 mm DEEP	1
B.24	390.00	22.00	M4 x 12.00 mm DEEP	1
B.25	450.00	22.00	M4 x 12.00 mm DEEP	1
B.26	510.00	22.00	M4 x 12.00 mm DEEP	1
B.27	570.00	22.00	M4 x 12.00 mm DEEP	1
B.28	630.00	22.00	M4 x 12.00 mm DEEP	1
B.29	690.00	22.00	M4 x 12.00 mm DEEP	1
B.30	750.00	22.00	M4 x 12.00 mm DEEP	1
B.31	810.00	22.00	M4 x 12.00 mm DEEP	1
B.32	870.00	22.00	M4 x 12.00 mm DEEP	1
B.33	930.00	22.00	M4 x 12.00 mm DEEP	1
C.1	840.00	0.00	Ø 6.50 mm THRU'	
C.2	710.00	0.00	Ø 6.50 mm THRU'	
C.3	580.00	0.00	Ø 6.50 mm THRU'	

HOLE TABLE				
Hole	X	Y	Size	REMARK
C.4	450.00	0.00	Ø 6.50 mm THRU'	
C.5	320.00	0.00	Ø 6.50 mm THRU'	
C.6	190.00	0.00	Ø 6.50 mm THRU'	
C.7	60.00	0.00	Ø 6.50 mm THRU'	

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

NOTE : (English)
MATERIAL: M.S.
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2
WEIGHT(Kg): 15.77 kg

NOTE :-(French)
MATÉRIEL : M.S.
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2
POIDS (Kg): 15.77 kg

RESERVED SPACE FOR COMMENTS

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED.

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.

UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.

0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(MC) FOR ANGULAR IN mm.

UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.

0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY
1	M4 TAPPING HOLES ADDED REFER HOLE TABLE	07.08.2024	7272

www.wipropari.com

WIPRO PARI GROUP

DESCRIPTION: RAIL SPACER

DRAWING TYPE: MACHINING

1.ALL DIMENSIONS ARE IN mm.
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO	SHEET SIZE
345.21 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. NA | PART CLASS. B | HEAT TREATMENT NA

LOCATION : PUNE

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
9265	03004785	03002882	#	P23Y5B156053	01	1 : 2
07/08/2024	07/08/2024	07/08/2024	NET WEIGHT-Kg 15.77 kg			SHEET 1 OF 1

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01043\E:\dw Uploading\2022-23\P23Y5\P23Y5B156053.dft