



NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

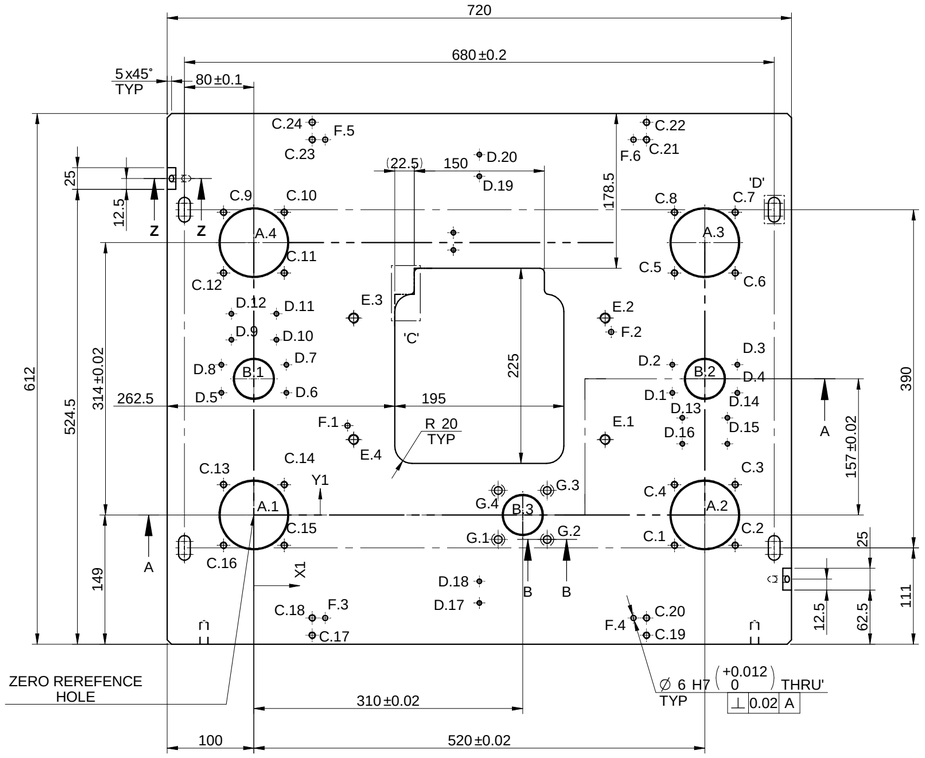




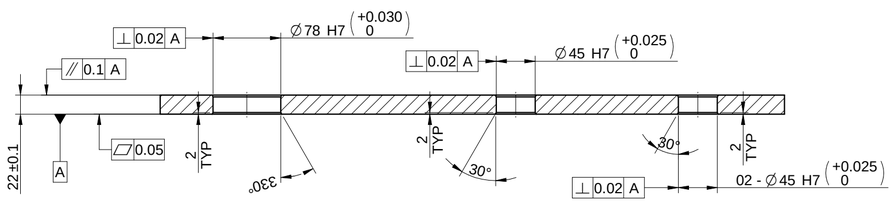


SECTION A-A
SCALE 1:5



SECTION B-B
SCALE 1:2




DETAIL 'D'
SCALE 1:2



SECTION Z-Z
SCALE 1:2


02 PLACES



DETAIL 'C'
SCALE 1:2

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 78.00 mm THRU'	REF SEC A-A
A.2	520.00	0.00	Ø 78.00 mm THRU'	REF SEC A-A
A.3	520.00	314.00	Ø 78.00 mm THRU'	REF SEC A-A
A.4	0.00	314.00	Ø 78.00 mm THRU'	REF SEC A-A
B.1	0.00	157.00	Ø 45.00 mm THRU'	REF SEC A-A
B.2	520.00	157.00	Ø 45.00 mm THRU'	REF SEC A-A
B.3	310.00	0.00	Ø 45.00 mm THRU'	REF SEC A-A
C.1	485.00	-35.00	M8 THRU'	
C.2	555.00	-35.00	M8 THRU'	
C.3	555.00	35.00	M8 THRU'	
C.4	485.00	35.00	M8 THRU'	
C.5	485.00	279.00	M8 THRU'	
C.6	555.00	279.00	M8 THRU'	
C.7	555.00	349.00	M8 THRU'	
C.8	485.00	349.00	M8 THRU'	
C.9	-35.00	349.00	M8 THRU'	
C.10	35.00	349.00	M8 THRU'	
C.11	35.00	279.00	M8 THRU'	
C.12	-35.00	279.00	M8 THRU'	
C.13	-35.00	35.00	M8 THRU'	
C.14	35.00	35.00	M8 THRU'	
C.15	35.00	-35.00	M8 THRU'	
C.16	-35.00	-35.00	M8 THRU'	
C.17	67.25	-138.75	M8 THRU'	
C.18	67.25	-118.75	M8 THRU'	
C.19	452.75	-138.75	M8 THRU'	
C.20	452.75	-118.75	M8 THRU'	
C.21	452.75	432.75	M8 THRU'	
C.22	452.75	452.75	M8 THRU'	
C.23	67.25	432.75	M8 THRU'	
C.24	67.25	452.75	M8 THRU'	
D.1	482.50	140.75	M6 THRU'	
D.2	482.50	173.25	M6 THRU'	
D.3	557.50	173.25	M6 THRU'	

HOLE TABLE				
Hole	X	Y	Size	REMARK
D.4	557.50	140.75	M6 THRU'	
D.5	-37.50	140.88	M6 THRU'	
D.6	37.50	140.88	M6 THRU'	
D.7	37.50	173.13	M6 THRU'	
D.8	-37.50	173.13	M6 THRU'	
D.9	-25.98	202.00	M6 THRU'	
D.10	25.98	202.00	M6 THRU'	
D.11	25.98	232.00	M6 THRU'	
D.12	-25.98	232.00	M6 THRU'	
D.13	494.02	112.00	M6 THRU'	
D.14	545.98	112.00	M6 THRU'	
D.15	545.98	82.00	M6 THRU'	
D.16	494.02	82.00	M6 THRU'	
D.17	260.00	-101.50	M6 THRU'	
D.18	260.00	-76.50	M6 THRU'	
D.19	260.00	390.50	M6 THRU'	
D.20	260.00	415.50	M6 THRU'	
E.1	405.00	87.00	M12 THRU'	
E.2	405.00	227.00	M12 THRU'	
E.3	115.00	227.00	M12 THRU'	
E.4	115.00	87.00	M12 THRU'	
F.1	108.00	103.00	Ø 6.00 mm THRU'	H7
F.2	412.00	211.00	Ø 6.00 mm THRU'	H7
F.3	82.25	-118.75	Ø 6.00 mm THRU'	H7
F.4	437.75	-118.75	Ø 6.00 mm THRU'	H7
F.5	82.25	432.75	Ø 6.00 mm THRU'	H7
F.6	437.75	432.75	Ø 6.00 mm THRU'	H7
G.1	281.75	-28.25	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm - 8.80 mm DEEP	REF SEC B-B
G.2	338.25	-28.25	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm - 8.80 mm DEEP	REF SEC B-B
G.3	338.25	28.25	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm - 8.80 mm DEEP	REF SEC B-B
G.4	281.75	28.25	Ø 9.00 mm THRU' C'BORE Ø 15.00 mm - 8.80 mm DEEP	REF SEC B-B

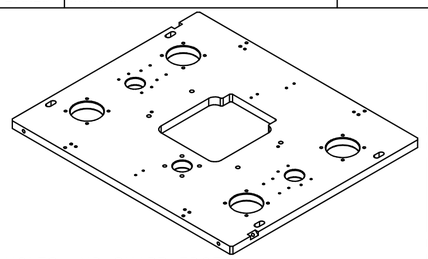

TOLERANCE NOTE :-
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN±0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D, SHOULD BE CONTROLLED WITHIN ±0.2.

NOTE :-(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :-(French)
EBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE : (English)
MATERIAL: M.S
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING:
WEIGHT(Kg): 63.82 kg

NOTE :-(French)
MATÉRIEL : M.S
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES :
POIDS (Kg): 63.82 kg

RESERVED SPACE FOR
CONTROLLED COPY

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A

Ø7.5 FINISH TO Ø8H7 ON ASSY.

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY
.	.	.	.
.	.	.	.

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: **BASE PLATE**

DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
1367.46 in^2	#	#	WPES	0300	PL-02	A2

REFERENCE DWG.	PRV73D123001	PART CLASS.	B	HEAT TREATMENT	N.A.

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006581	03004785	03002882	#	P23Y5C043001	00	1 : 5
09/05/2024	09/05/2024	09/05/2024	NET WEIGHT-Kg 63.82 kg			SHEET 1 OF 1

\\srv01043\ExDM Uploading\2022-23\P23Y5\P23Y5C043001.dft