NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

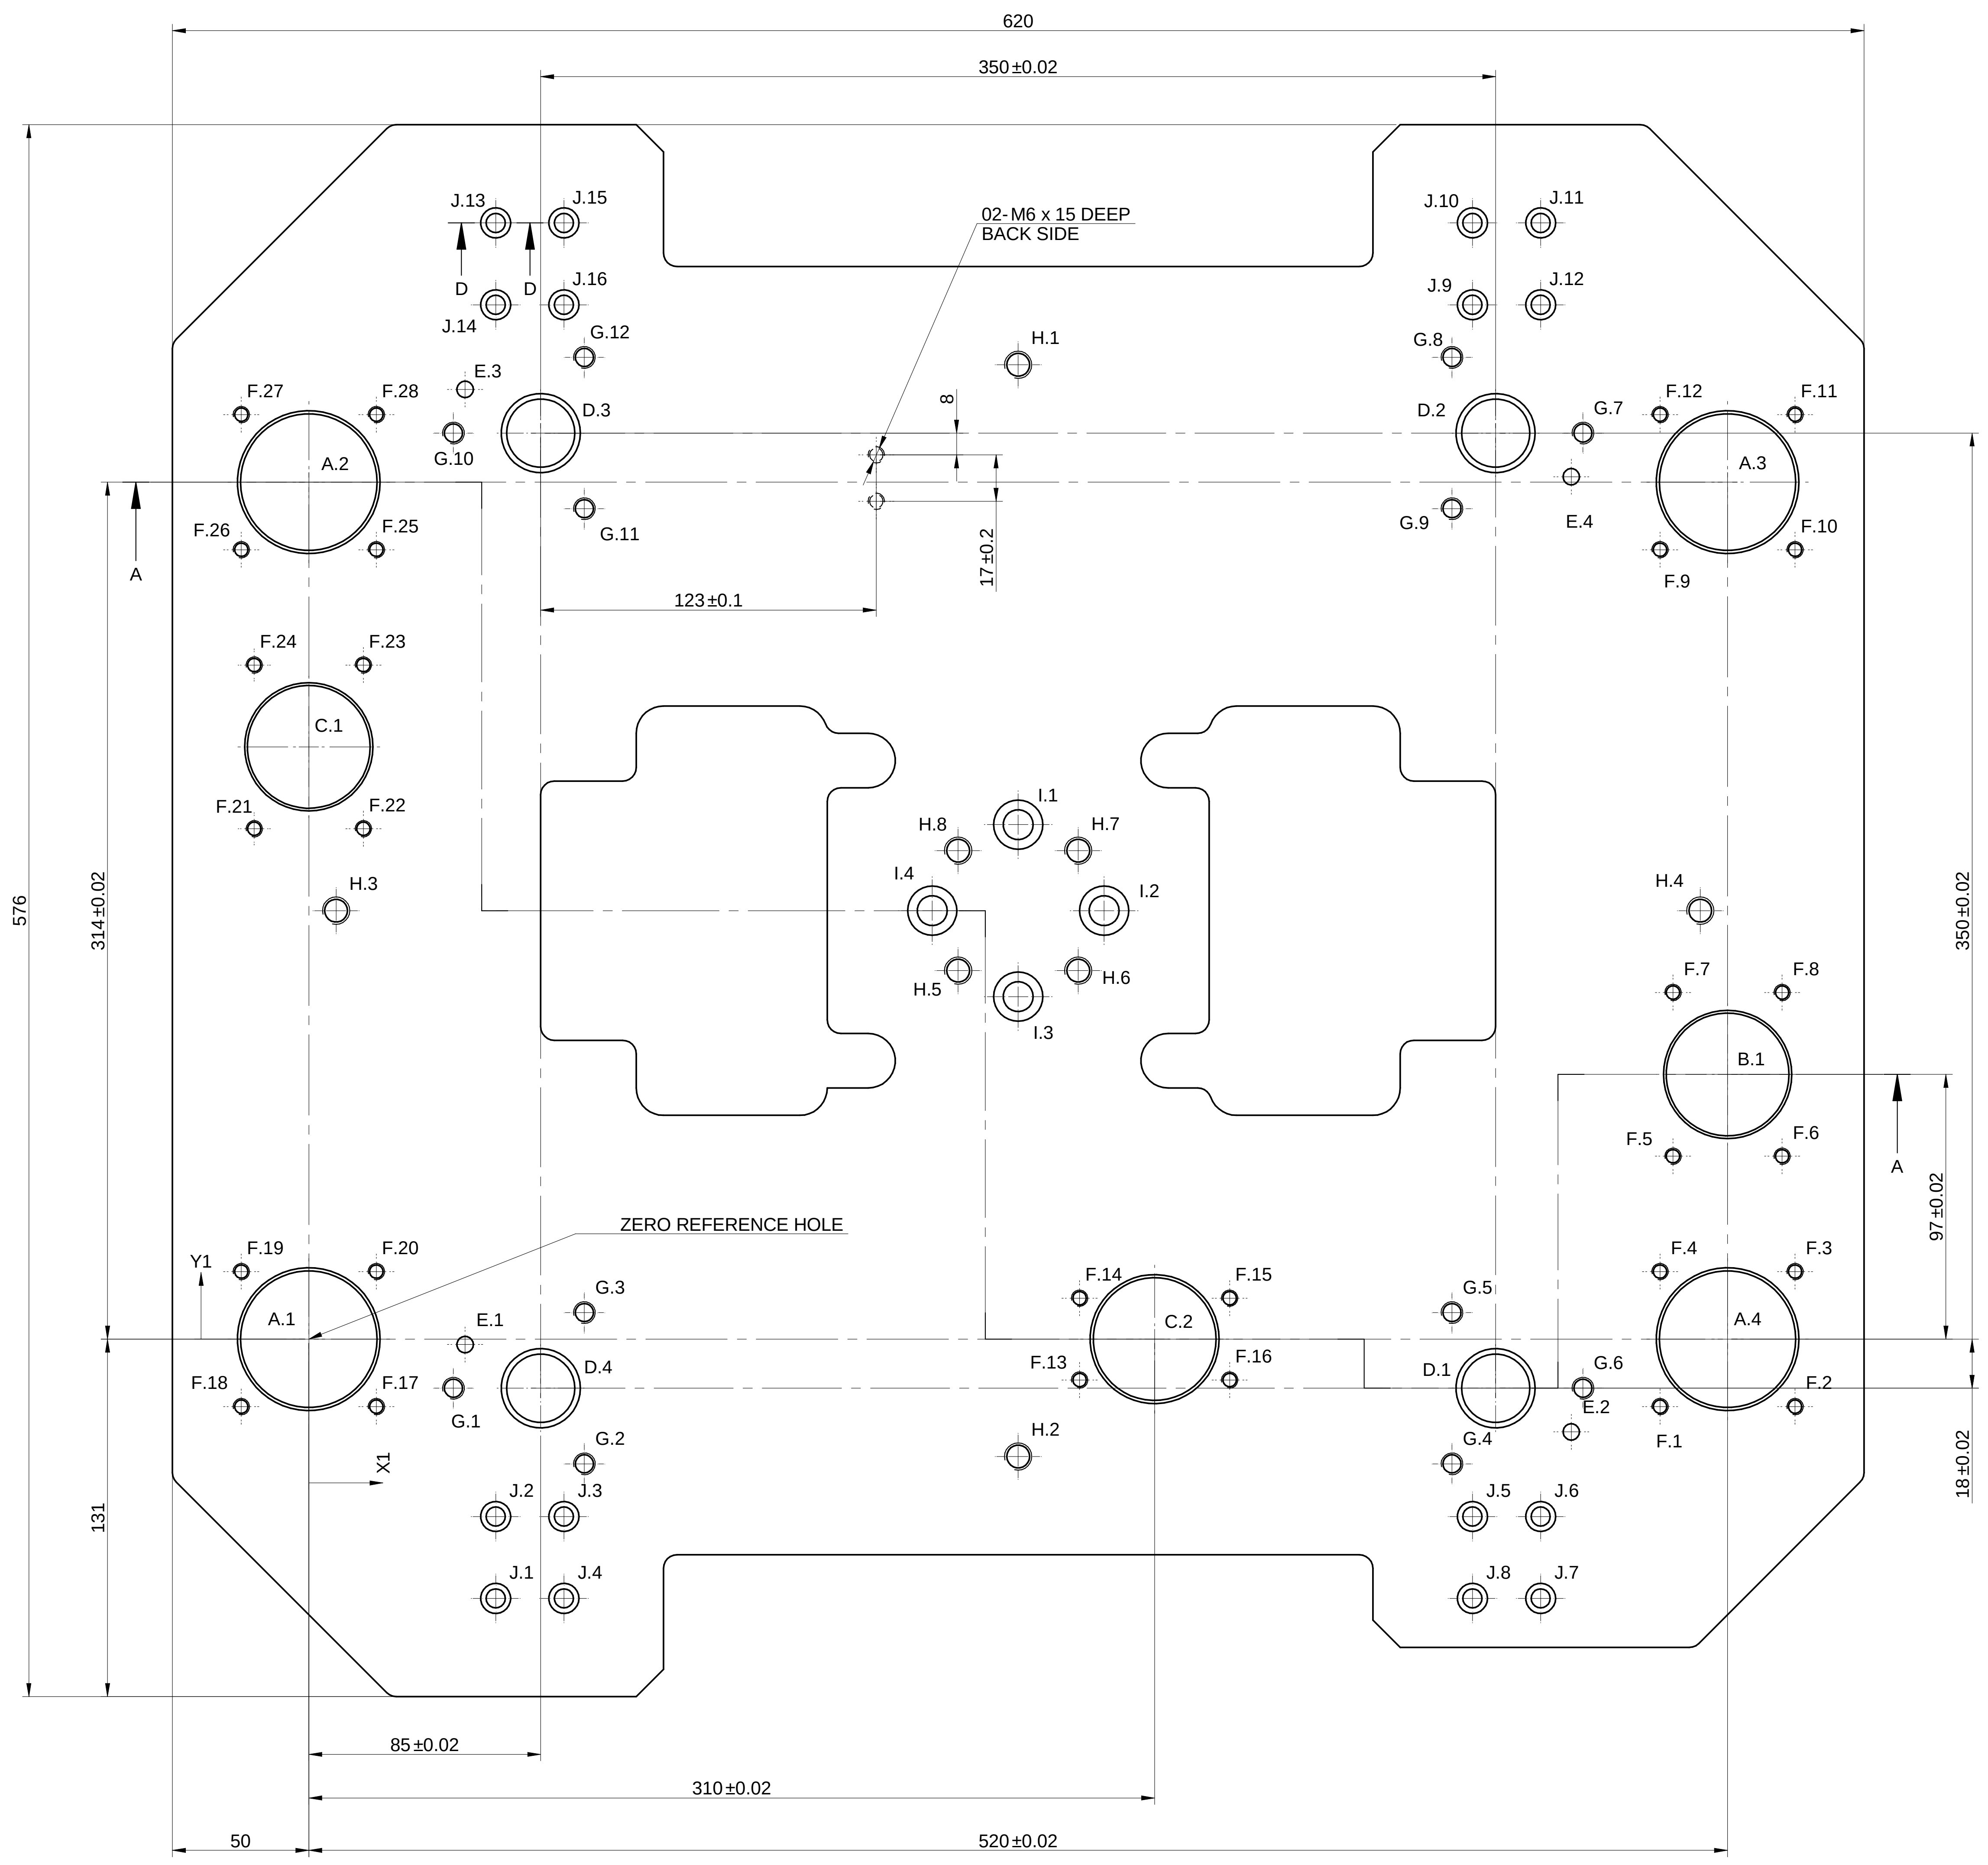

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 50.00 mm THRU'	H7 REF SEC A-A
A.2	0.00	314.00	Ø 50.00 mm THRU'	H7 REF SEC A-A
A.3	520.00	314.00	Ø 50.00 mm THRU'	H7 REF SEC A-A
A.4	520.00	0.00	Ø 50.00 mm THRU'	H7 REF SEC A-A
B.1	520.00	97.00		H7 REF SEC A-A
C.1	0.00	217.00	Ø 45.00 mm THRU'	H7 REF SEC A-A
C.2	310.00	0.00	Ø 45.00 mm THRU'	H7 REF SEC A-A
D.1	435.00	-18.00	Ø 25.00 mm THRU'	H7 REF SEC A-A
D.2	435.00	332.00	Ø 25.00 mm THRU'	H7 REF SEC A-A
D.3	85.00	332.00	Ø 25.00 mm THRU'	H7 REF SEC A-A
D.4	85.00	-18.00	Ø 25.00 mm THRU'	H7 REF SEC A-A
E.1	57.29	-2.00	Ø 6.00 mm x 15.00 mm DEEP	H7
E.2	462.71	-34.00	Ø 6.00 mm x 15.00 mm DEEP	H7
E.3	57.29	348.00	Ø 6.00 mm x 15.00 mm DEEP	H7
E.4	462.71	316.00	Ø 6.00 mm x 15.00 mm DEEP	H7
F.1	495.25	-24.75	M6 THRU'	
F.2	544.75	-24.75	M6 THRU'	
F.3	544.75	24.75	M6 THRU'	
F.4	495.25	24.75	M6 THRU'	
F.5	500.00	67.00	M6 THRU'	
F.6	540.00	67.00	M6 THRU'	
F.7	500.00	127.00	M6 THRU'	
F.8	540.00	127.00	M6 THRU'	
F.9	495.25	289.25	M6 THRU'	
F.10	544.75	289.25	M6 THRU'	
F.11	544.75	338.75	M6 THRU'	
F.12	495.25	338.75	M6 THRU'	
F.13	282.50	-15.00	M6 THRU'	
F.14	282.50	15.00	M6 THRU'	
F.15	337.50	15.00	M6 THRU'	
F.16	337.50	-15.00	M6 THRU'	
F.17	24.75	-24.75	M6 THRU'	
F.18	-24.75	-24.75	M6 THRU'	
F.19	-24.75	24.75	M6 THRU'	
F.20	24.75	24.75	M6 THRU'	
F.21	-20.00	187.00	M6 THRU'	

HOLE TABLE				
Hole	X	Y	Size	REMARK
F.22	20.00	187.00	M6 THRU'	
F.23	20.00	247.00	M6 THRU'	
F.24	-20.00	247.00	M6 THRU'	
F.25	24.75	289.25	M6 THRU'	
F.26	-24.75	289.25	M6 THRU'	
F.27	-24.75	338.75	M6 THRU'	
F.28	24.75	338.75	M6 THRU'	
G.1	53.00	-18.00	M8 THRU'	
G.2	101.00	-45.71	M8 THRU'	
G.3	101.00	9.71	M8 THRU'	
G.4	419.00	-45.71	M8 THRU'	
G.5	419.00	9.71	M8 THRU'	
G.6	467.00	-18.00	M8 THRU'	
G.7	467.00	332.00	M8 THRU'	
G.8	419.00	359.71	M8 THRU'	
G.9	419.00	304.29	M8 THRU'	
G.10	53.00	332.00	M8 THRU'	
G.11	101.00	304.29	M8 THRU'	
G.12	101.00	359.71	M8 THRU'	
H.1	260.00	357.00	M10 THRU'	
H.2	260.00	-43.00	M10 THRU'	
H.3	10.00	157.00	M10 THRU'	
H.4	510.00	157.00	M10 THRU'	
H.5	238.00	135.00	M10 THRU'	
H.6	282.00	135.00	M10 THRU'	
H.7	282.00	179.00	M10 THRU'	
H.8	238.00	179.00	M10 THRU'	
I.1	260.00	188.50	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm - 10.00 mm DEEP	REF SEC A-A
I.2	291.50	157.00	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm - 10.00 mm DEEP	REF SEC A-A
I.3	260.00	125.50	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm - 10.00 mm DEEP	REF SEC A-A
I.4	228.50	157.00	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm - 10.00 mm DEEP	REF SEC A-A

HOLE TABLE				
Hole	X	Y	Size	REMARK
J.1	68.50	-95.00	Ø 7.00 mm THRU' C'BORE Ø 11.00 mm - 10.00 mm DEEP	REF SEC D-D
J.2	68.50	-65.00	Ø 7.00 mm THRU' C'BORE Ø 11.00 mm - 10.00 mm DEEP	REF SEC D-D
J.3	93.50	-65.00	Ø 7.00 mm THRU' C'BORE Ø 11.00 mm - 10.00 mm DEEP	REF SEC D-D
J.4	93.50	-95.00	Ø 7.00 mm THRU' C'BORE Ø 11.00 mm - 10.00 mm DEEP	REF SEC D-D
J.5	426.50	-65.00	Ø 7.00 mm THRU' C'BORE Ø 11.00 mm - 10.00 mm DEEP	REF SEC D-D
J.6	451.50	-65.00	Ø 7.00 mm THRU' C'BORE Ø 11.00 mm - 10.00 mm DEEP	REF SEC D-D
J.7	451.50	-95.00	Ø 7.00 mm THRU' C'BORE Ø 11.00 mm - 10.00 mm DEEP	REF SEC D-D
J.8	426.50	-95.00	Ø 7.00 mm THRU' C'BORE Ø 11.00 mm - 10.00 mm DEEP	REF SEC D-D
J.9	426.50	379.00	Ø 7.00 mm THRU' C'BORE Ø 11.00 mm - 10.00 mm DEEP	REF SEC D-D
J.10	426.50	409.00	Ø 7.00 mm THRU' C'BORE Ø 11.00 mm - 10.00 mm DEEP	REF SEC D-D
J.11	451.50	409.00	Ø 7.00 mm THRU' C'BORE Ø 11.00 mm - 10.00 mm DEEP	REF SEC D-D
J.12	451.50	379.00	Ø 7.00 mm THRU' C'BORE Ø 11.00 mm - 10.00 mm DEEP	REF SEC D-D
J.13	68.50	409.00	Ø 7.00 mm THRU' C'BORE Ø 11.00 mm - 10.00 mm DEEP	REF SEC D-D
J.14	68.50	379.00	Ø 7.00 mm THRU' C'BORE Ø 11.00 mm - 10.00 mm DEEP	REF SEC D-D
J.15	93.50	409.00	Ø 7.00 mm THRU' C'BORE Ø 11.00 mm - 10.00 mm DEEP	REF SEC D-D
J.16	93.50	379.00	Ø 7.00 mm THRU' C'BORE Ø 11.00 mm - 10.00 mm DEEP	REF SEC D-D

TOLERANCE NOTE :- (English)
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN +/- 0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN +/- 0.1

NOTE DE TOLERANCE :- (French)
1) TOUT TROU H7 C.D DOIT ÊTRE CONTRÔLÉ SOUS +/- 0.02 / IT7
2) TOUT TROU ET CONTRE-ALÉSAGE C.D,
DOIT ÊTRE CONTROLÉ SOUS +/- 0.1

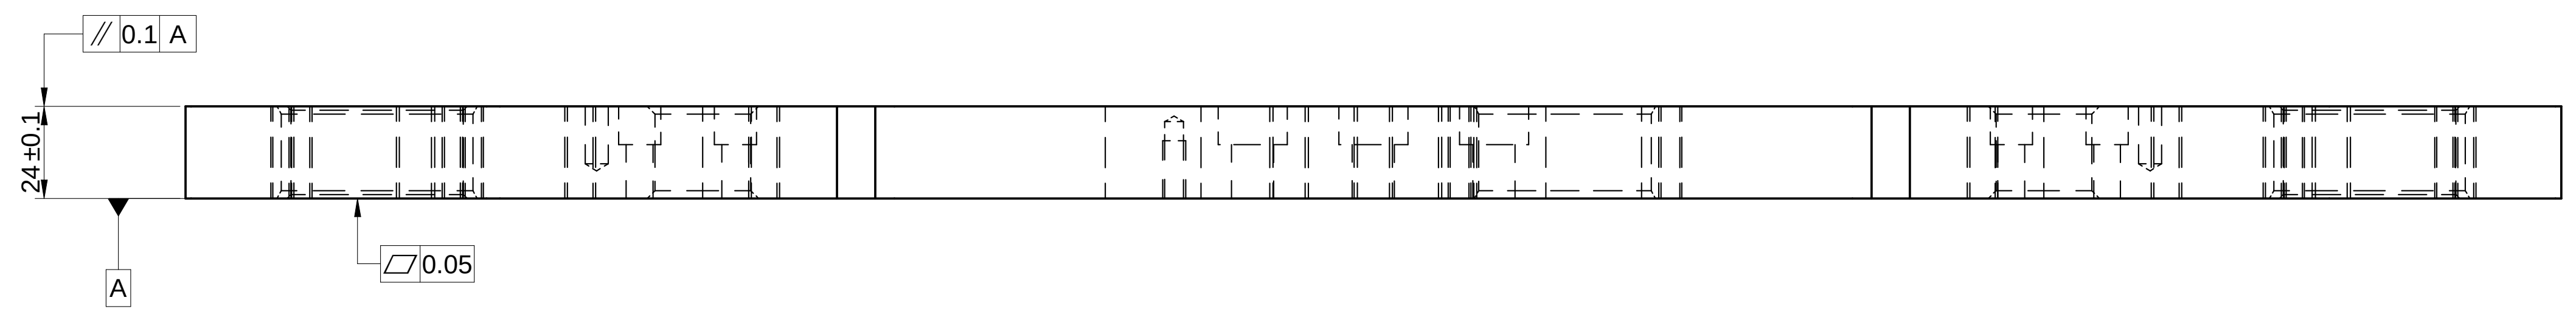

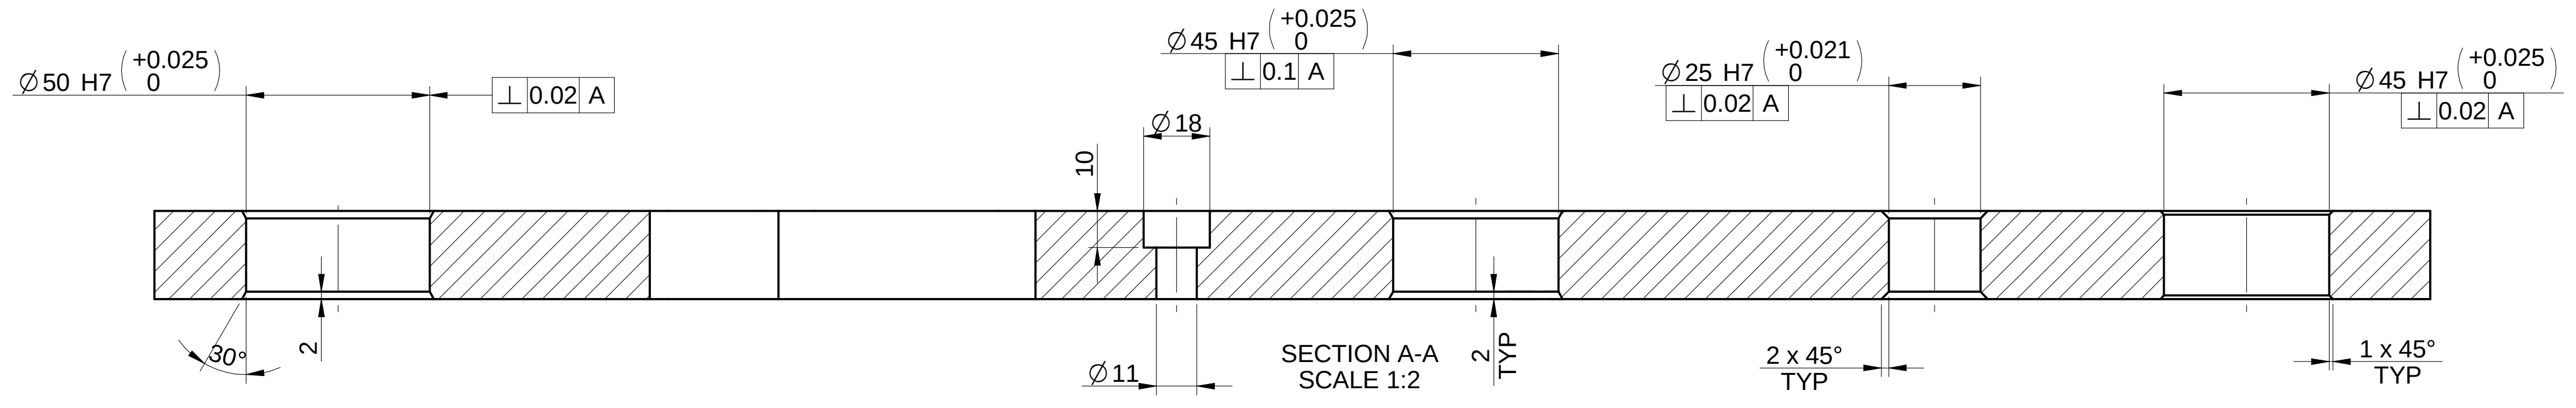

SECTION A-A
SCALE 1:2

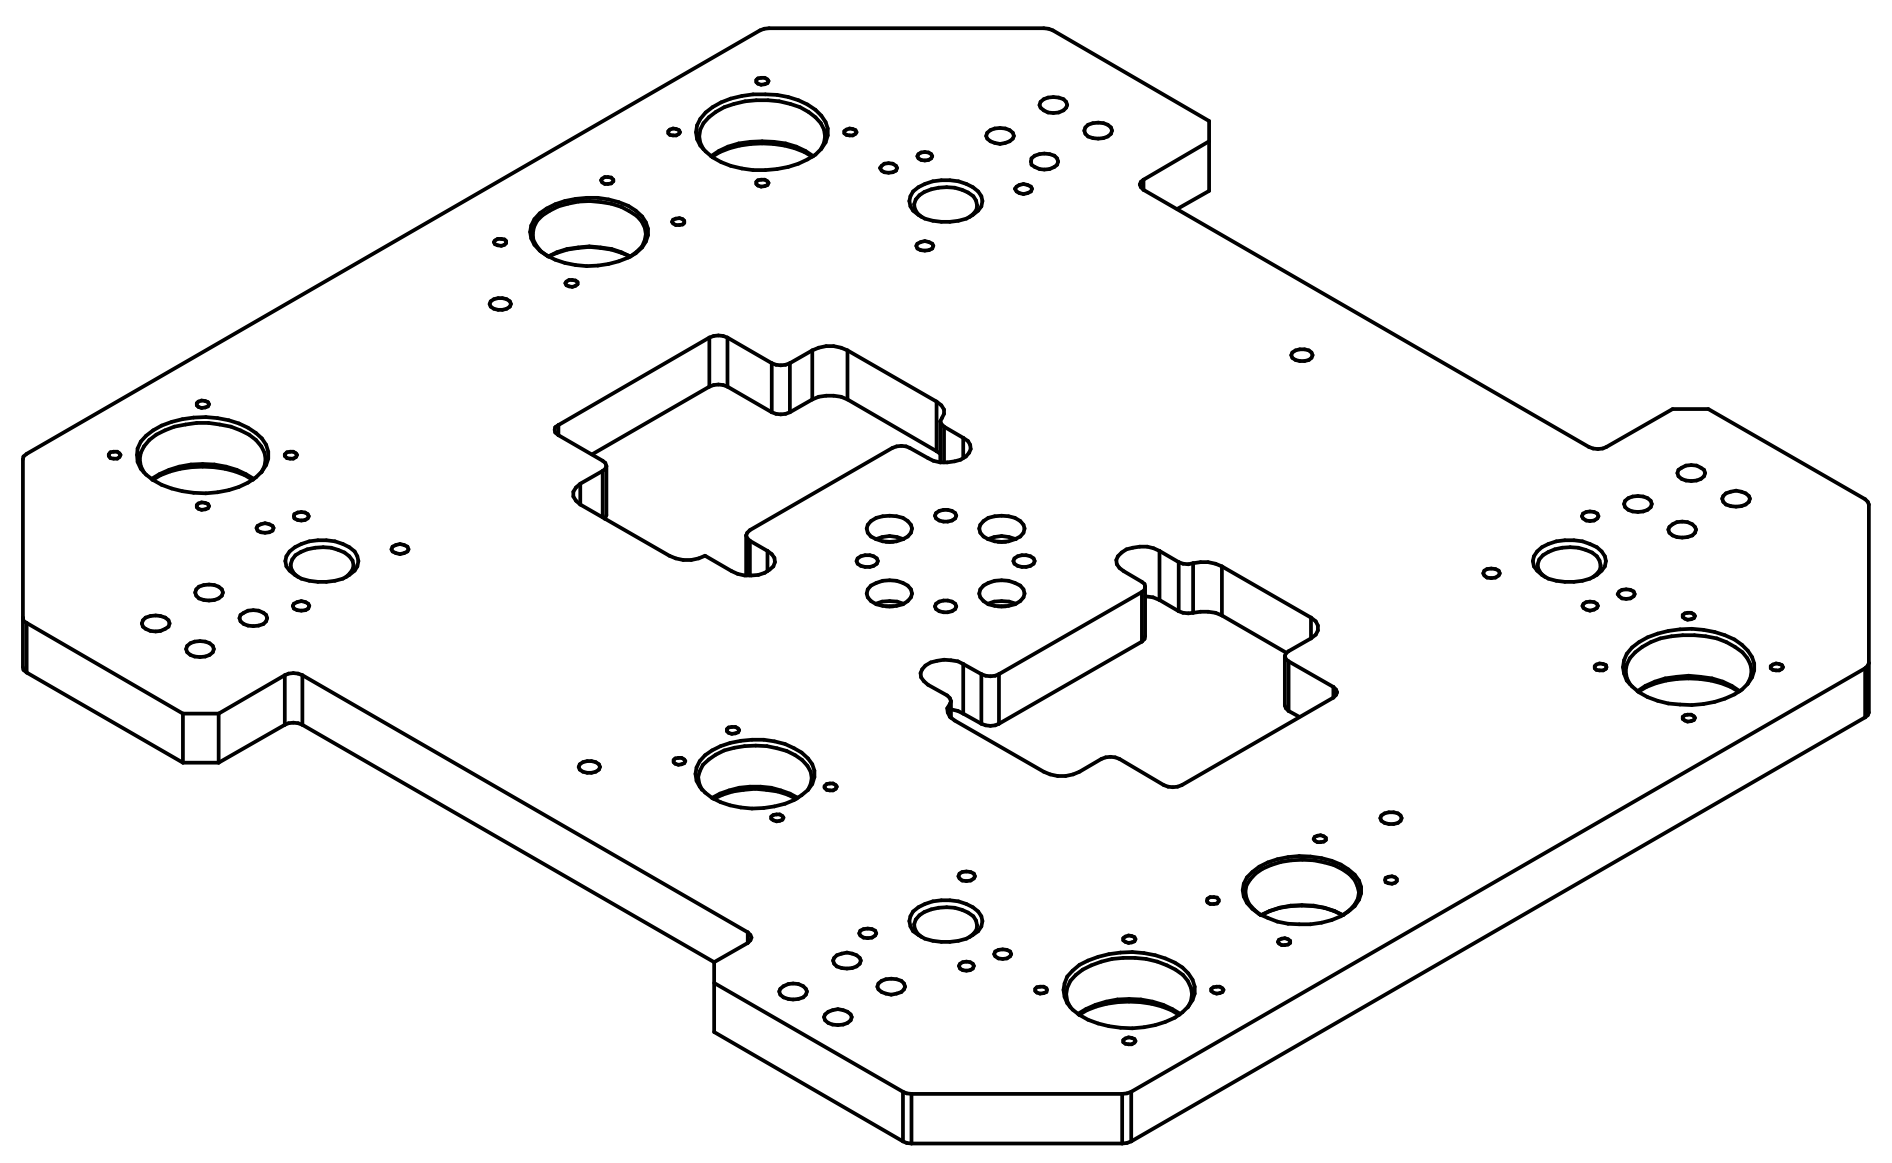

NOTE :-(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :-(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

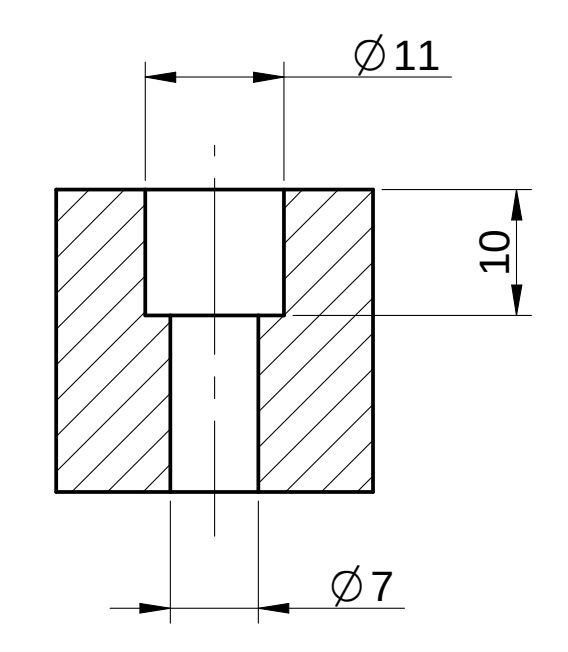

SECTION D-D
SCALE 1:1

NOTE : (English)
MATERIAL: M.S
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: $\sqrt{3.2}$
WEIGHT(Kg): 50.37 kg

NOTE :-(French)
MATÉRIEL : M.S
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : $\sqrt{3.2}$
POIDS (Kg): 50.37 kg

RESERVED SPACE
FOR

CONTROLLED COPY

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

WIPRO PARI GROUP

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

DESCRIPTION
TOP PLATE - 1

DRAWING TYPE
MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
1068.63 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. PRV73D123002
PART CLASS. B
HEAT TREATMENT N.A.

DRN.BY	CHKD.BY	APPD.BY
03006581	03004785	03002882
09/05/2024	09/05/2024	09/05/2024

MATERIAL
#
NET WEIGHT-Kg
50.37 kg

DRG./PART CODE
P23Y5C043002

REV.
00

SCALE
1 : 2

SHEET
1 OF 2

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

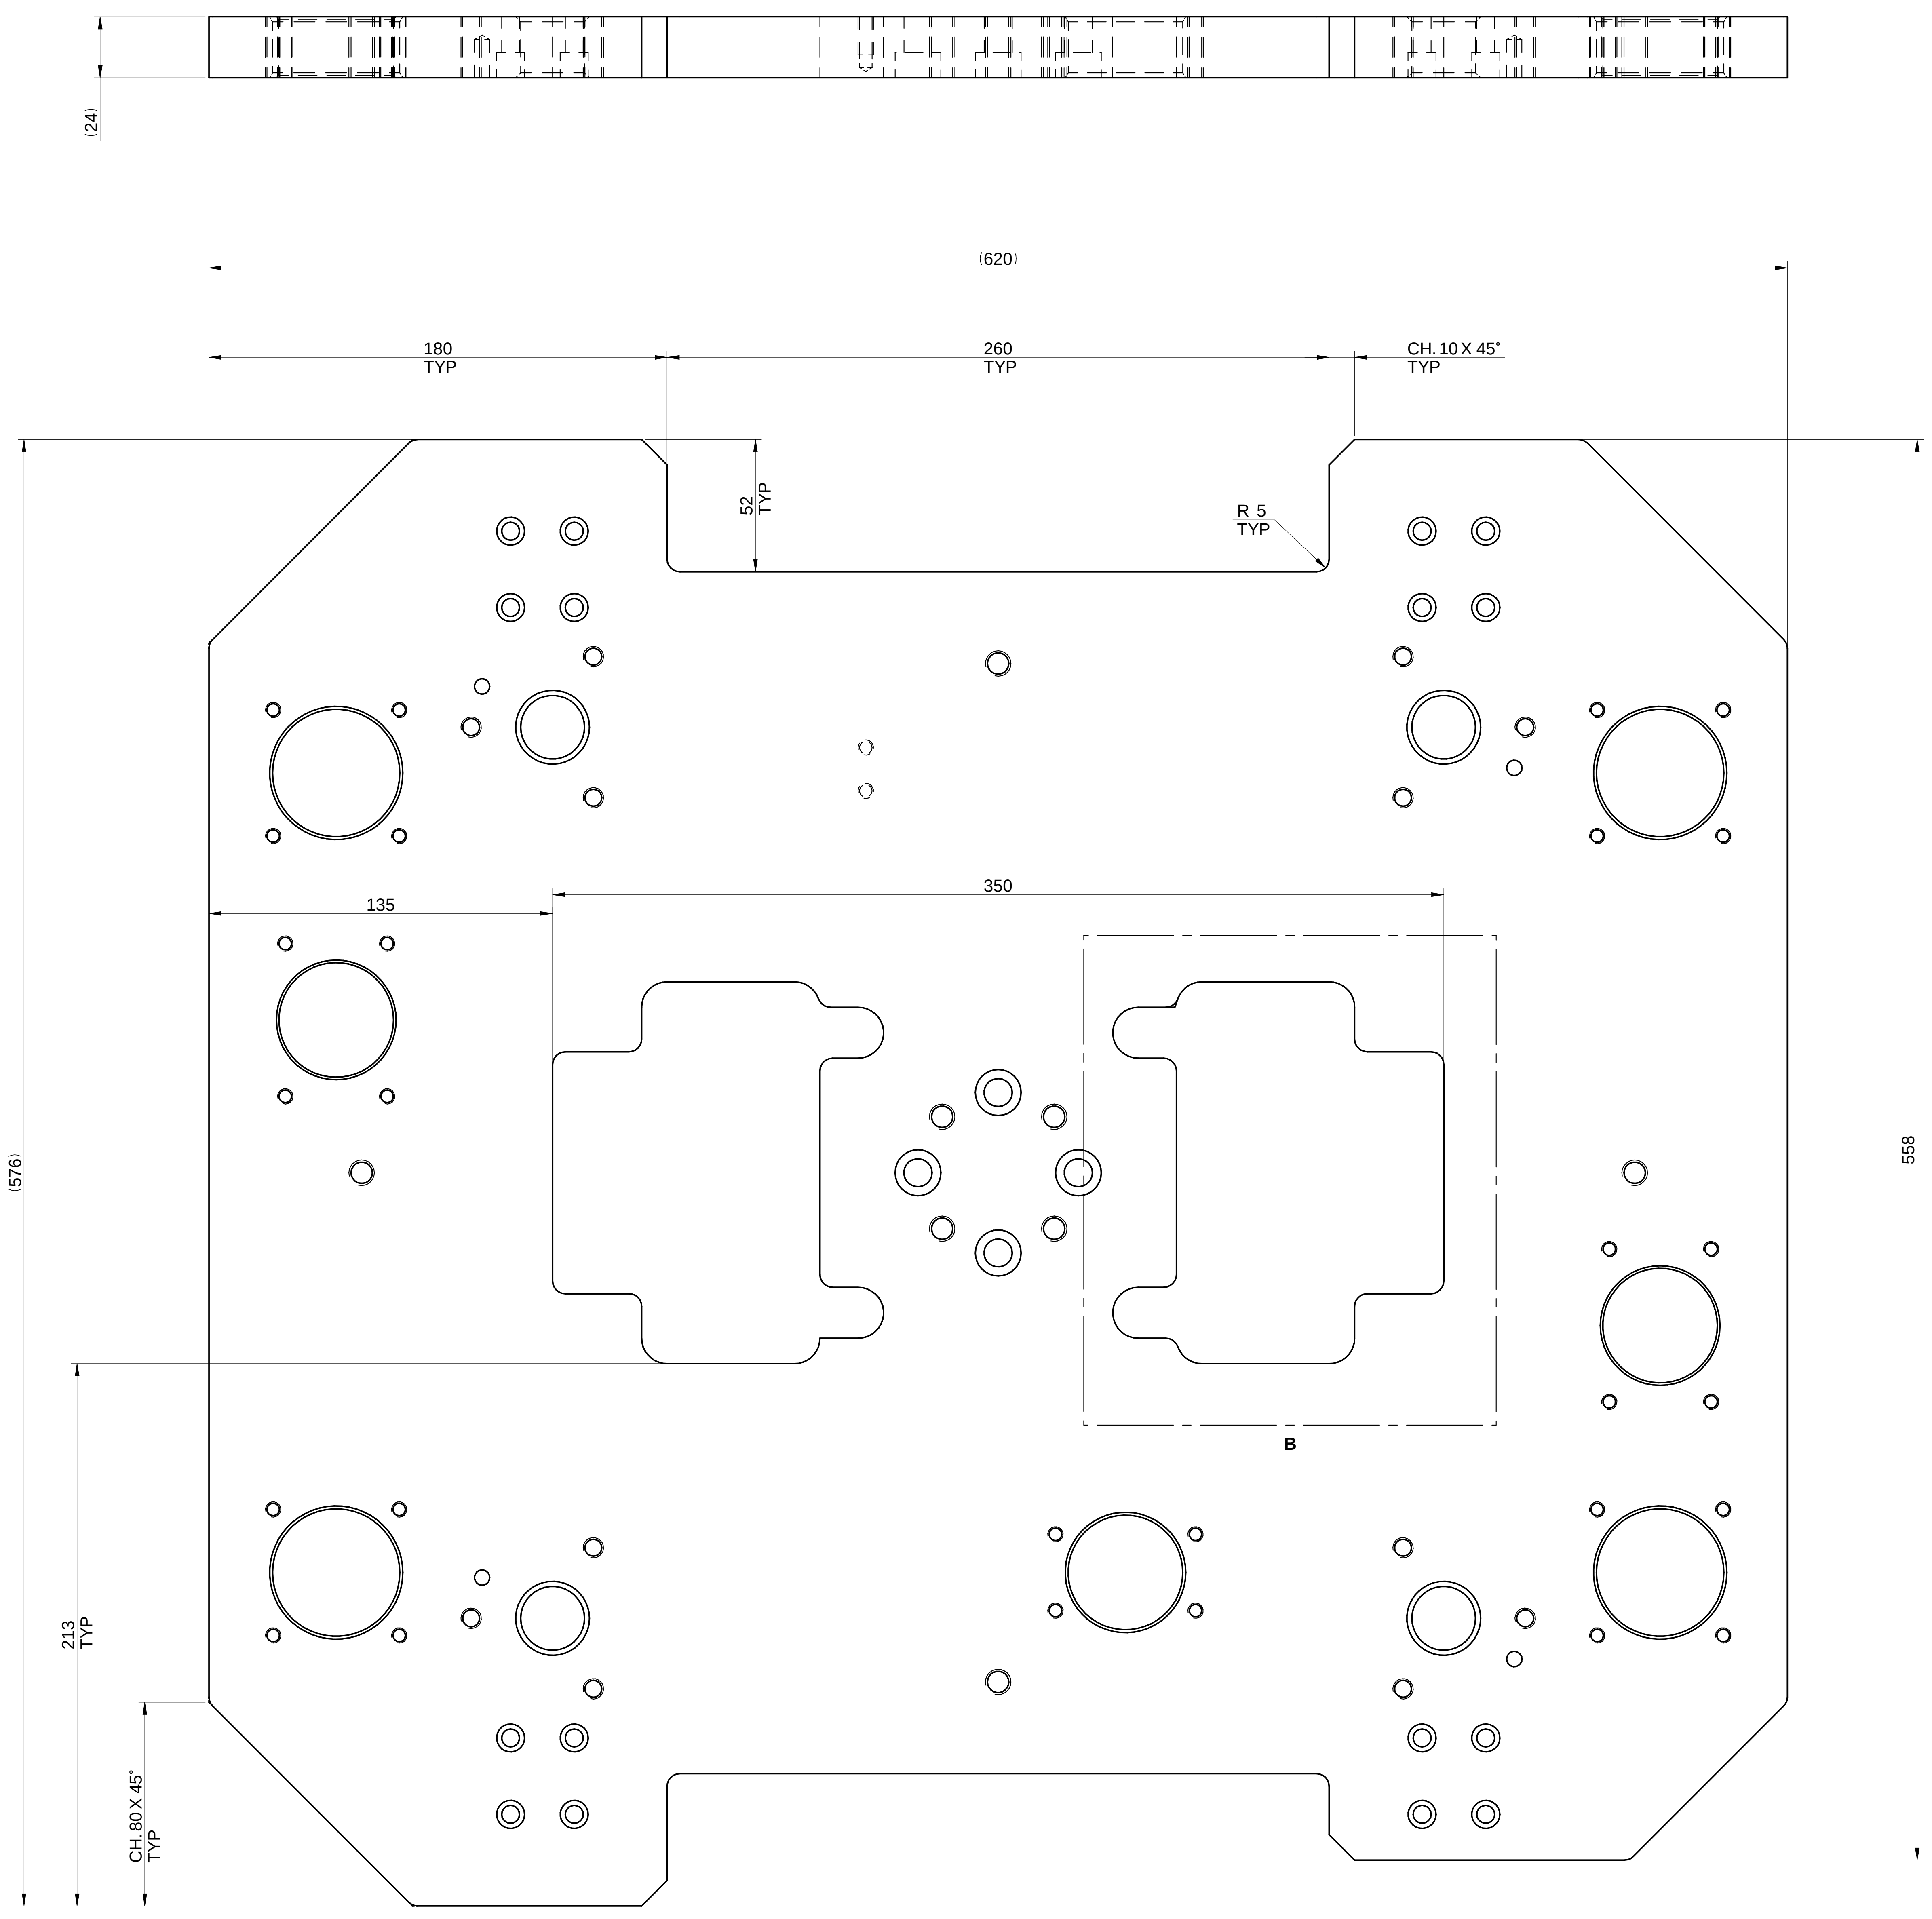

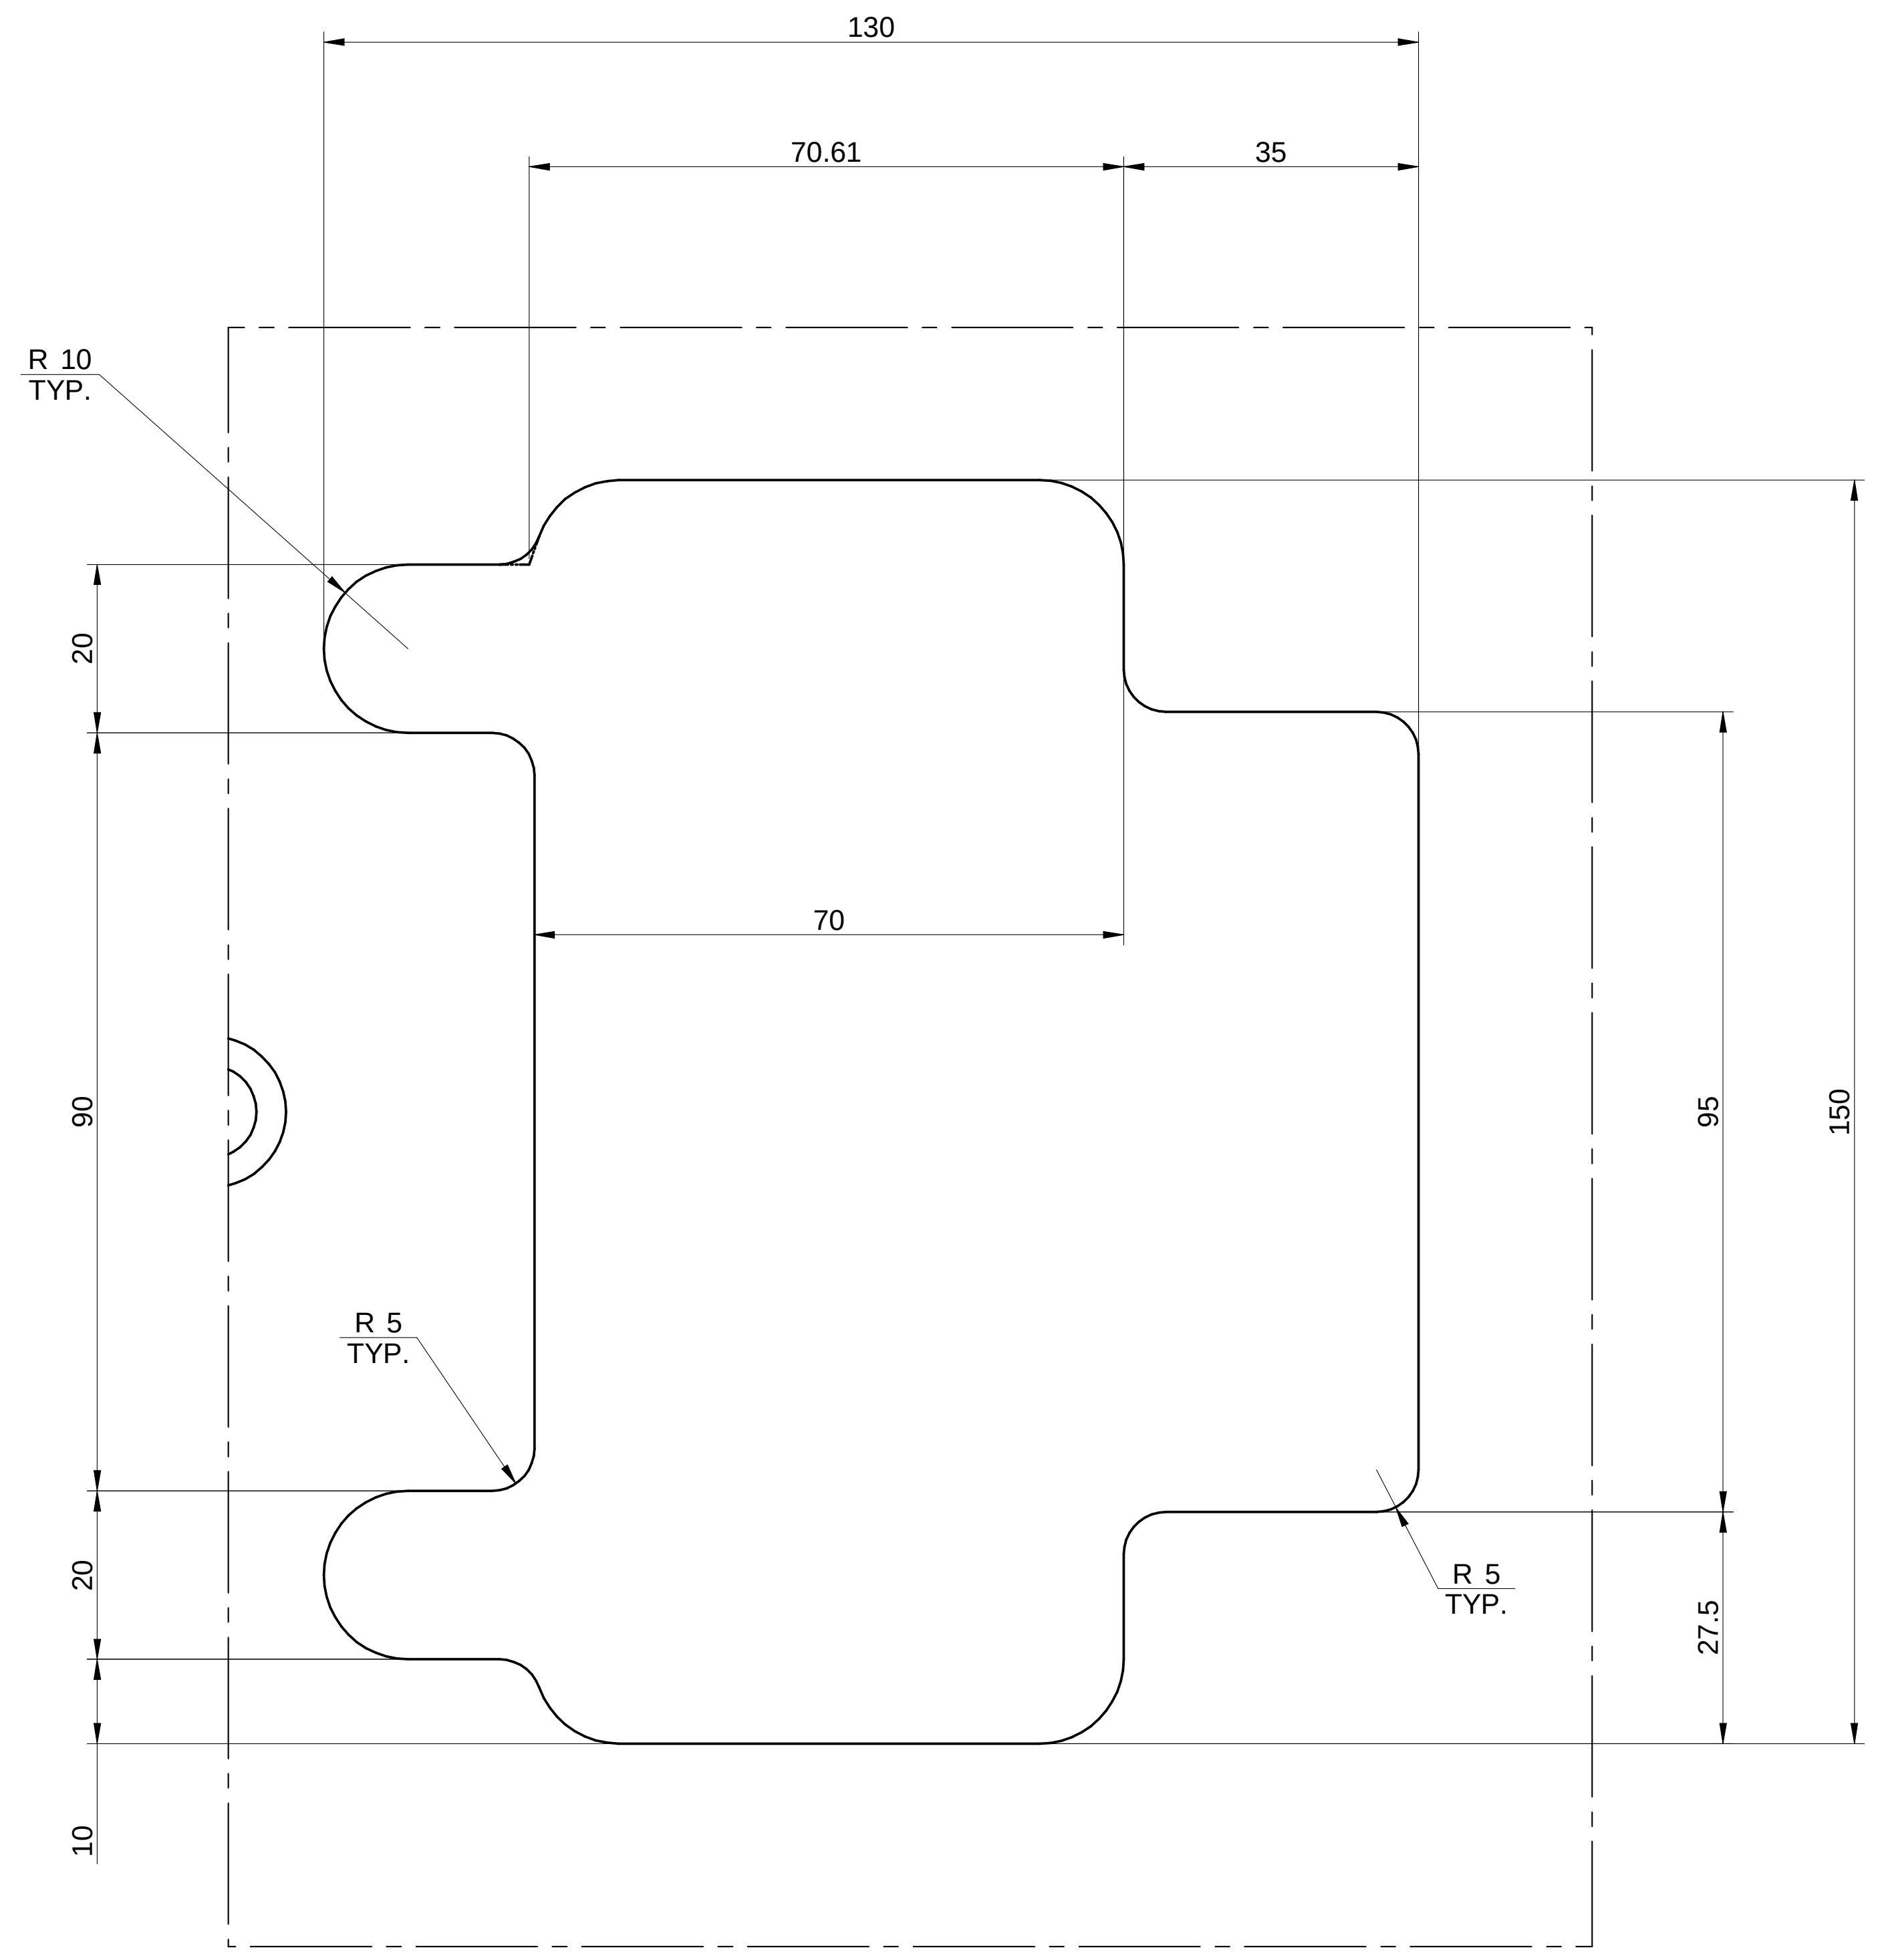

DETAIL B
SCALE 1:1
TYP

NOTE : (English)
MATERIAL: M.S
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: $\sqrt{3.2}$
WEIGHT(Kg): 50.37 kg

NOTE :-(French)
MATERIEL : M.S
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : $\sqrt{3.2}$
POIDS (Kg): 50.37 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

RESERVED SPACE
FOR

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

www.wipropari.com	WIPRO PARI GROUP						
1.ALL DIMENSIONS ARE IN mm	DESCRIPTION TOP PLATE - 1					DRAWING TYPE MACHINING	
2.DO NOT SCALE DRAWING.	SURFACE AREA 1068.63 in^2	SURFACE TREATMENT #	MACHINING #	DESIGN UNIT WPES	DESIGN UNIT CD. 0300	TEAM NO. PL-02	SHEET SIZE A1
3.IF IN DOUBT , ASK TEAM MEMBER	REFERENCE DWG. PRV73D123002		PART CLASS. B	HEAT TREATMENT N.A.			
LOCATION : PUNE	DRN.BY 03006581 09/05/2024	CHKD.BY 03004785 09/05/2024	APPD.BY 03002882 09/05/2024	MATERIAL # NET WEIGHT-Kg 50.37 kg	DRG./PART CODE P23Y5C043002	REV. 00	SCALE 1 : 2 SHEET 2 OF 2

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED