
NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

NOTE :-(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.


NOTE :-(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

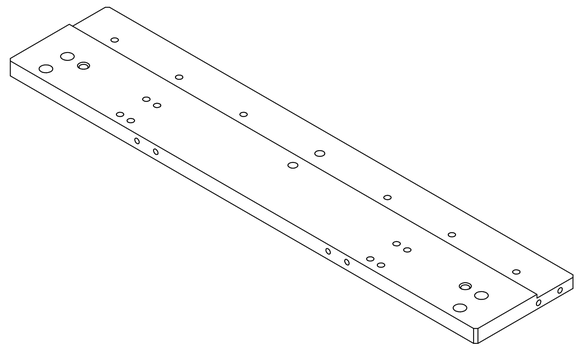

SCALE/ÉCHELLE 1:2


TOLERANCE NOTE :- (English)
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN +/- 0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D. SHOULD BE CONTROLLED WITHIN +/- 0.1

NOTE DE TOLERANCE :- (French)
1) TOUT TROU H7 C.D DOIT ÊTRE CONTRÔLÉ SOUS +/- 0.02 / IT7
2) TOUT TROU ET CONTRE-ALÉSAGE C.D. DOIT ÊTRE CONTRÔLÉ SOUS +/- 0.1

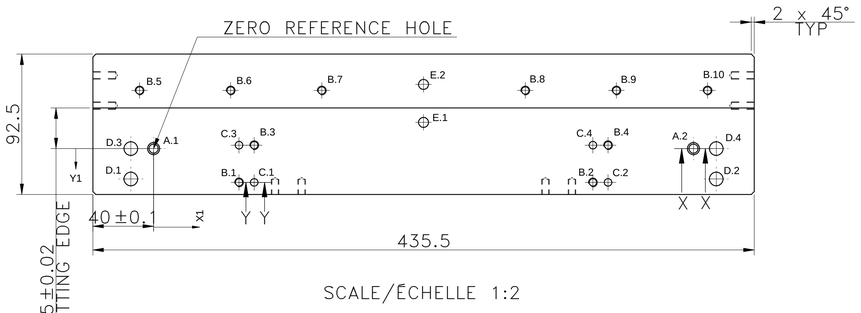


SCALE/ÉCHELLE 1:2

SCALE/ÉCHELLE 1:2

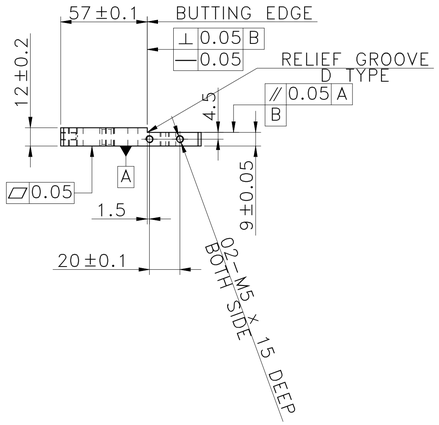

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 6.00 mm THRU'	REF SEC X-X
A.2	355.50	0.00	Ø 6.00 mm THRU'	REF SEC X-X
B.1	56.25	-22.25	M6 THRU'	
B.2	289.25	-22.25	M6 THRU'	
B.3	66.25	2.25	M6 THRU'	
B.4	299.25	2.25	M6 THRU'	
B.5	-9.25	38.25	M6 THRU'	
B.6	50.75	38.25	M6 THRU'	
B.7	110.75	38.25	M6 THRU'	
B.8	244.75	38.25	M6 THRU'	
B.9	304.75	38.25	M6 THRU'	
B.10	364.75	38.25	M6 THRU'	
C.1	66.25	-22.25	Ø 5.00 mm THRU'	REF SEC Y-Y
C.2	299.25	-22.25	Ø 5.00 mm THRU'	REF SEC Y-Y
C.3	56.25	2.25	Ø 5.00 mm THRU'	REF SEC Y-Y
C.4	289.25	2.25	Ø 5.00 mm THRU'	REF SEC Y-Y
D.1	-15.00	-20.00	Ø 9.00 mm THRU'	
D.2	370.50	-20.00	Ø 9.00 mm THRU'	
D.3	-15.00	0.00	Ø 9.00 mm THRU'	
D.4	370.50	0.00	Ø 9.00 mm THRU'	
E.1	177.75	17.25	Ø 6.60 mm THRU'	
E.2	177.75	42.25	Ø 6.60 mm THRU'	

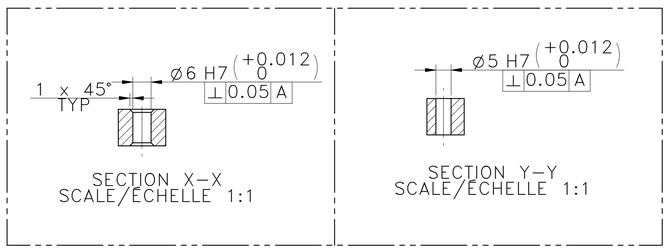

NOTE : (English)
FINISH : IZBP

NOTE :-(French)
FINITION : IZBP

NOTE : (English)
MATERIAL: M.S
FINISH: N.A.
MACHINING: 3.2
WEIGHT(Kg): 3.35 kg

NOTE :-(French)
MATÉRIEL : M.S
FINITION : N.A.
MACHINES : 3.2
POIDS (Kg): 3.35 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

RESERVED SPACE FOR CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°
UNSPECIFIED TOL (FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL (FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL (MC) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL (MC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

WIPRO PARI GROUP
www.wipropari.com

1.ALL DIMENSIONS ARE IN mm	DESCRIPTION: RAIL MTG PLATE					DRAWING TYPE: MACHINING	
2.DO NOT SCALE DRAWING.	SURFACE AREA: 151.15 in^2	SURFACE TREATMENT: #	MACHINING: #	DESIGN UNIT: WPES	DESIGN UNIT CD.: 0300	TEAM NO: PL-02	SHEET SIZE: A1
3.IF IN DOUBT , ASK TEAM MEMBER	REFERENCE DWG.: PRT84M071002	PART CLASS.: B	HEAT TREATMENT: N.A.				
LOCATION : PUNE	DRN.BY: 6166	CHKD.BY: 03006480	APPD.BY: 03002882	MATERIAL: #	DRG./PART CODE: P23Y5C043012	REV.: 00	SCALE: 1 : 2
© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED	08/05/2024	08/05/2024	08/05/2024	NET WEIGHT-Kg: 3.35 kg			SHEET: 1 OF 1

\\srv01043\E:\dtm Uploading\2022-23\P23Y5\P23Y5C043012.dft