

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

NOTE :-(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.


NOTE :-(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

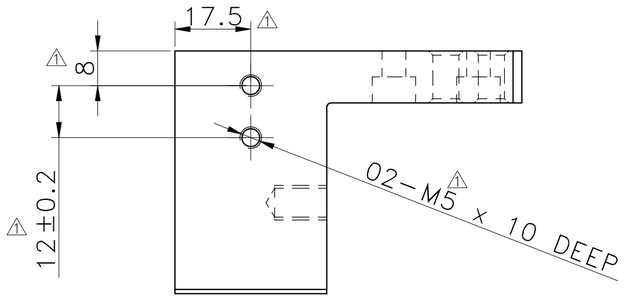


SCALE/ÉCHELLE 1:1

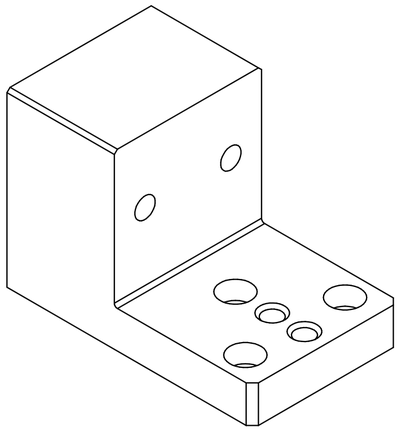


SCALE/ÉCHELLE 1:1

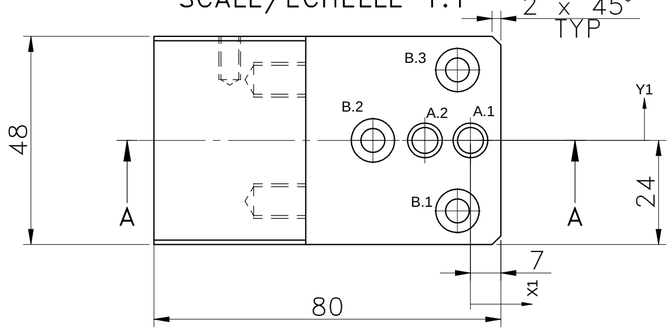


SCALE/ÉCHELLE 1:1

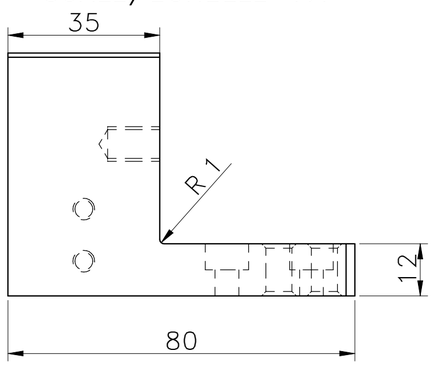

SCALE/ÉCHELLE 1:1



SCALE/ÉCHELLE 1:1

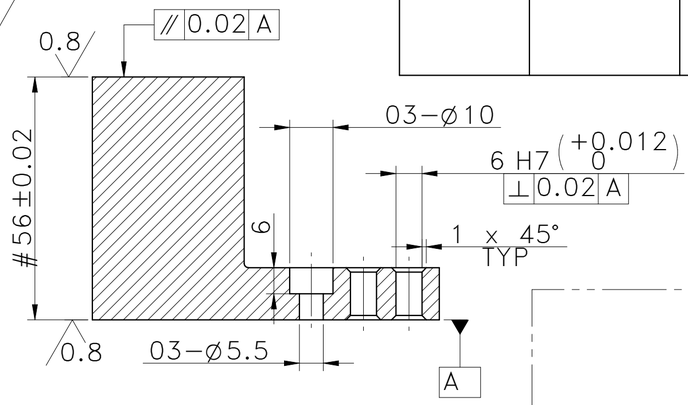

SECTION A-A
SCALE/ÉCHELLE 1:1

TOLERANCE NOTE :- (English)
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN +/- 0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN +/- 0.1

NOTE DE TOLERANCE :- (French)
1) TOUT TROU H7 C.D DOIT ÊTRE CONTRÔLÉ SOUS +/- 0.02 / IT7
2) TOUT TROU ET CONTRE-ALÉSAGE C.D,
DOIT ÊTRE CONTROLÉ SOUS +/- 0.1

HOLE TABLE

Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 6.00 mm THRU'	
A.2	-10.50	0.00	Ø 6.00 mm THRU'	
B.1	-3.00	-16.25	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm - 6.00 mm DEEP	
B.2	-22.50	0.00	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm - 6.00 mm DEEP	
B.3	-3.00	16.25	Ø 5.50 mm THRU' C'BORE Ø 10.00 mm - 6.00 mm DEEP	

NOTE - # MARKED DIMENSION TO BE MAINTAINED SAME FOR ALL QTY.

HEAT TREATMENT NOTE :- (English)
1) TO BE CASE HARDENED UPTO 56~60 HRC.
2) CASE DEPTH 0.8~1.2mm.
3) THREADS TO BE KEEP SOFT.
4) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.(IF APPLICABLE)

NOTE POUR LE TRAITEMENT DE LA CHALEUR :-(French)
1) À ENDURCIR JUSQUÀ 56~60 HRC.
2) PROFONDEUR DU TRAITEMENT 0.8 ~ 1.2MM.
3) MAINTENIR LES FILTAGES PROPRE
4) RE-TARAUDAGE À FAIRE APRÈS TRAITEMENT DE SURFACE CHEZ LE FOURNISSEUR (S'IL Y A LIEU)

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : MW

NOTE : (English)
MATERIAL: 20MnCr5
FINISH: N.A.
MACHINING: 3.2 (0.8)
WEIGHT(Kg): 0.91 kg

NOTE :-(French)
MATÉRIEL : 20MnCr5
FINITION : N.A.
MACHINES : 3.2 (0.8)
POIDS (Kg): 0.91 kg

NOTE : (English)
FINISH : IZBP

NOTE :-(French)
FINITION : IZBP

RESERVED SPACE FOR CONTROLLED COPY
CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY
1	MISSING DIMENSION ADDED	10/06/2024	6166

www.wipropari.com
1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: MOVING BLOCK-1
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
30.64 in^2	#	#	WPES	0300	PL-02	A2

REFERENCE DWG. ---
PART CLASS. B
HEAT TREATMENT
REF NOTE

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
6166	03006480	03002882	#	P23Y5C043017	01	1 : 1
10/06/2024	10/06/2024	10/06/2024	NET WEIGHT-Kg 0.91 kg			SHEET 1 OF 1

\\srv01043\ExDM Uploading\2022-23\P23Y5\P23Y5C043017.dft