


NOTE : STANDARD FASTENER TORQUE AS PER PST/DES/01 TABLE-A


PFR/DES/07/REV-00

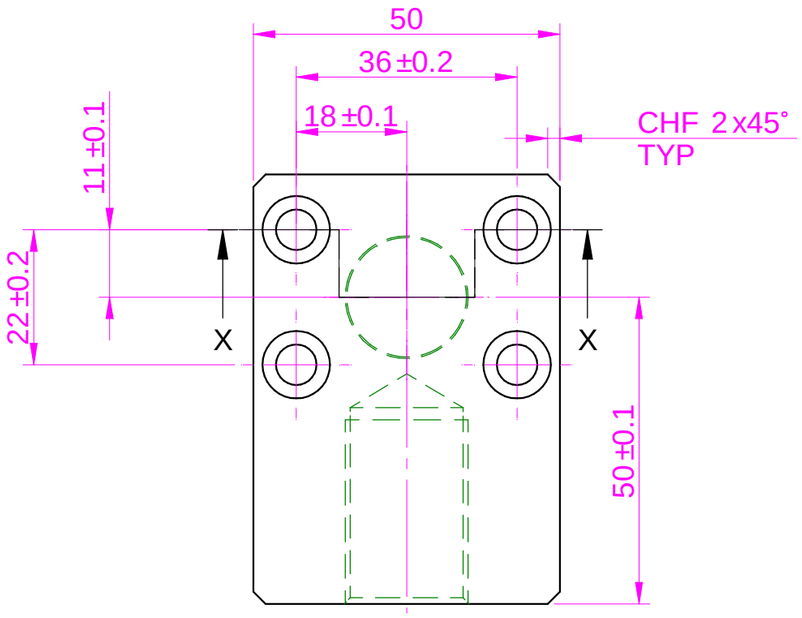


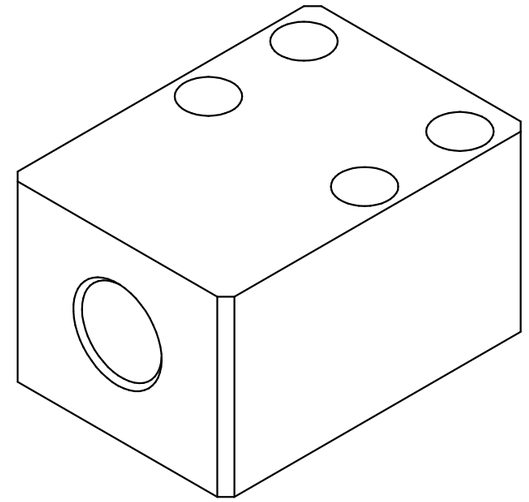

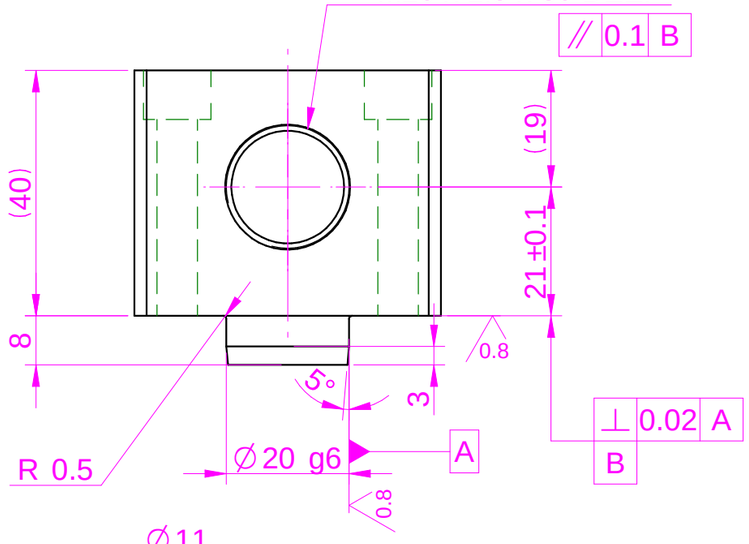

SECTION X-X
SCALE 1:1

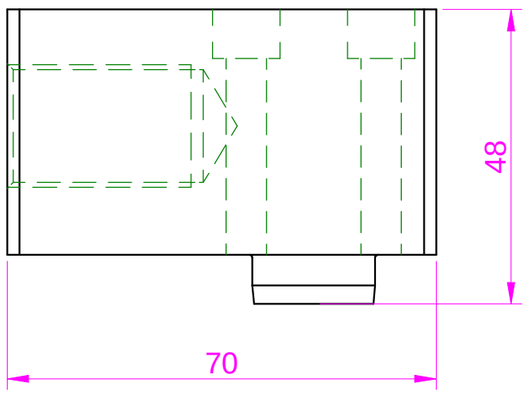

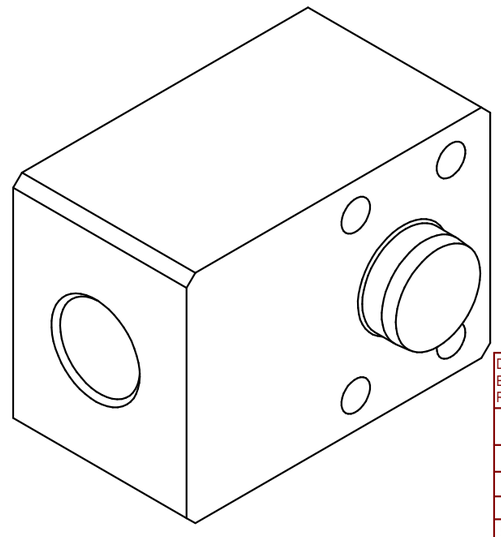

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED.	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1 °
10 UP TO 50	±0 °30'
50 UP TO 120	±0 °20'
120 UP TO 400	±0 °10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
LIMITS	
Gen Tol.: IS 2102	

PSA REF. CODE_PRE93B305016

REVISION	DESCRIPTION	DCR. NO.	DATE	DRN.BY

PARI

www.parirobotics.com

1.ALL DIMENSIONS ARE IN mm

2.DO NOT SCALE DRAWING.

3.IF IN DOUBT , ASK TEAM MEMBER

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

PRECISION AUTOMATION & ROBOTICS INDIA LTD

DESCRIPTION: CYLINDER ROD MTG BLOCK_M20X1.5

DRAWING TYPE: MACHINING

SURFACE AREA	FINISH	MACHINING	MATERIAL :	NET WEIGHT-Kg:	TEAM NO.	SHEET SIZE
34.43 in^2	IZBP	3.2 (0.8)	M.S.	0.98 kg	PL-02	A3

	DRN.BY	CHKD.BY	APPD.BY
	PRAVIN	PRASAD	RUPESH
	27/04/2018		27/04/2
DATE	27/04/2018		

REFERENCE DWG. PAN19B010563

PART CLASS. B

DRG./PART CODE: PRE93B305017

REV. 0

SCALE 1 : 1

SHEET 1 OF 1

\\parienggnew\BT10ENGG\17-18\PRE93000000-PSA\E-xDM_Uploading\PRE93B305017.dft