


NOTE : STANDARD FASTENER TORQUE AS PER PST/DES/01 TABLE-A PFR/DES/07/REV-00

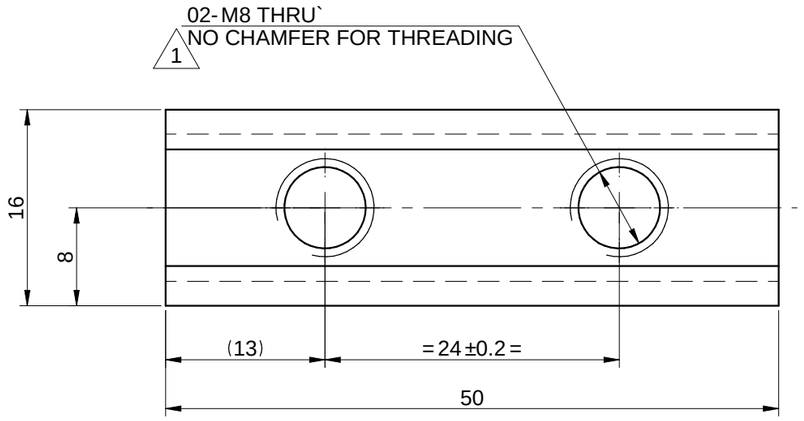

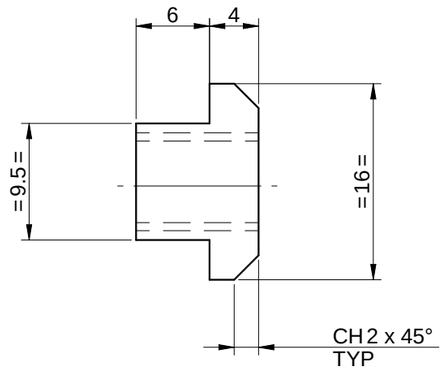

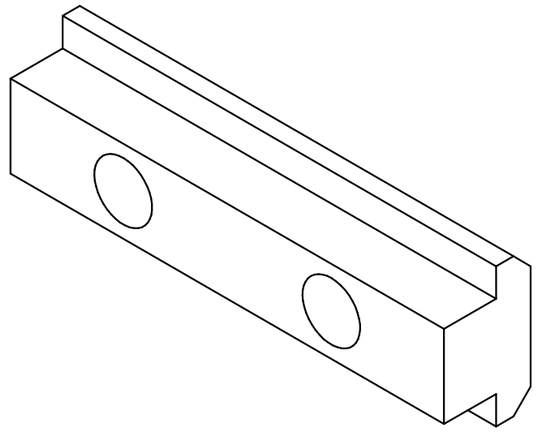

1 HEAT TREATMENT :-
1) TO BE TOUGHENED UPTO 28-32 HRC.
2) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.(IF APPLICABLE)

REVISION	DESCRIPTION	DCR. NO.	DATE	DRN.BY
1	MATERIAL,NOTE & FINISH CHANGED	P2_det/3831/19	18-04-19	AKASH

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED.

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1 °
10 UP TO 50	±0 °30'
50 UP TO 120	±0 °20'
120 UP TO 400	±0 °10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
LIMITS	
Gen Tol.: IS 2102	

PARI
www.parirobotics.com

PRECISION AUTOMATION & ROBOTICS INDIA LTD

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

DESCRIPTION: **TEE NUT M8 - 24**

DRAWING TYPE: MACHINING

SURFACE AREA	FINISH	MACHINING	MATERIAL :	NET WEIGHT-Kg:	TEAM NO.	SHEET SIZE
2995.68 mm^2	IRON BLUE ZINC PASSIVATION	▽▽	C45	0.04 kg	PL-02	A3

DRN.BY	CHKD.BY	APPD BY	REFERENCE DWG.	DRG./PART CODE	REV.	SCALE
GORAKH	PRASAD	UMESH	---	UEC000001213	01	2:1
22/04/2019			PART CLASS. B			SHEET 1 OF 1
DATE	22/04/2019	22/04/2019				

\\WKS0902\share\Revisions\Avinash\UEC000001213.00.dft