
NOTE : STANDARD FASTENER TORQUE AS PER PST/DES/01 TABLE-A PFR/DES/07

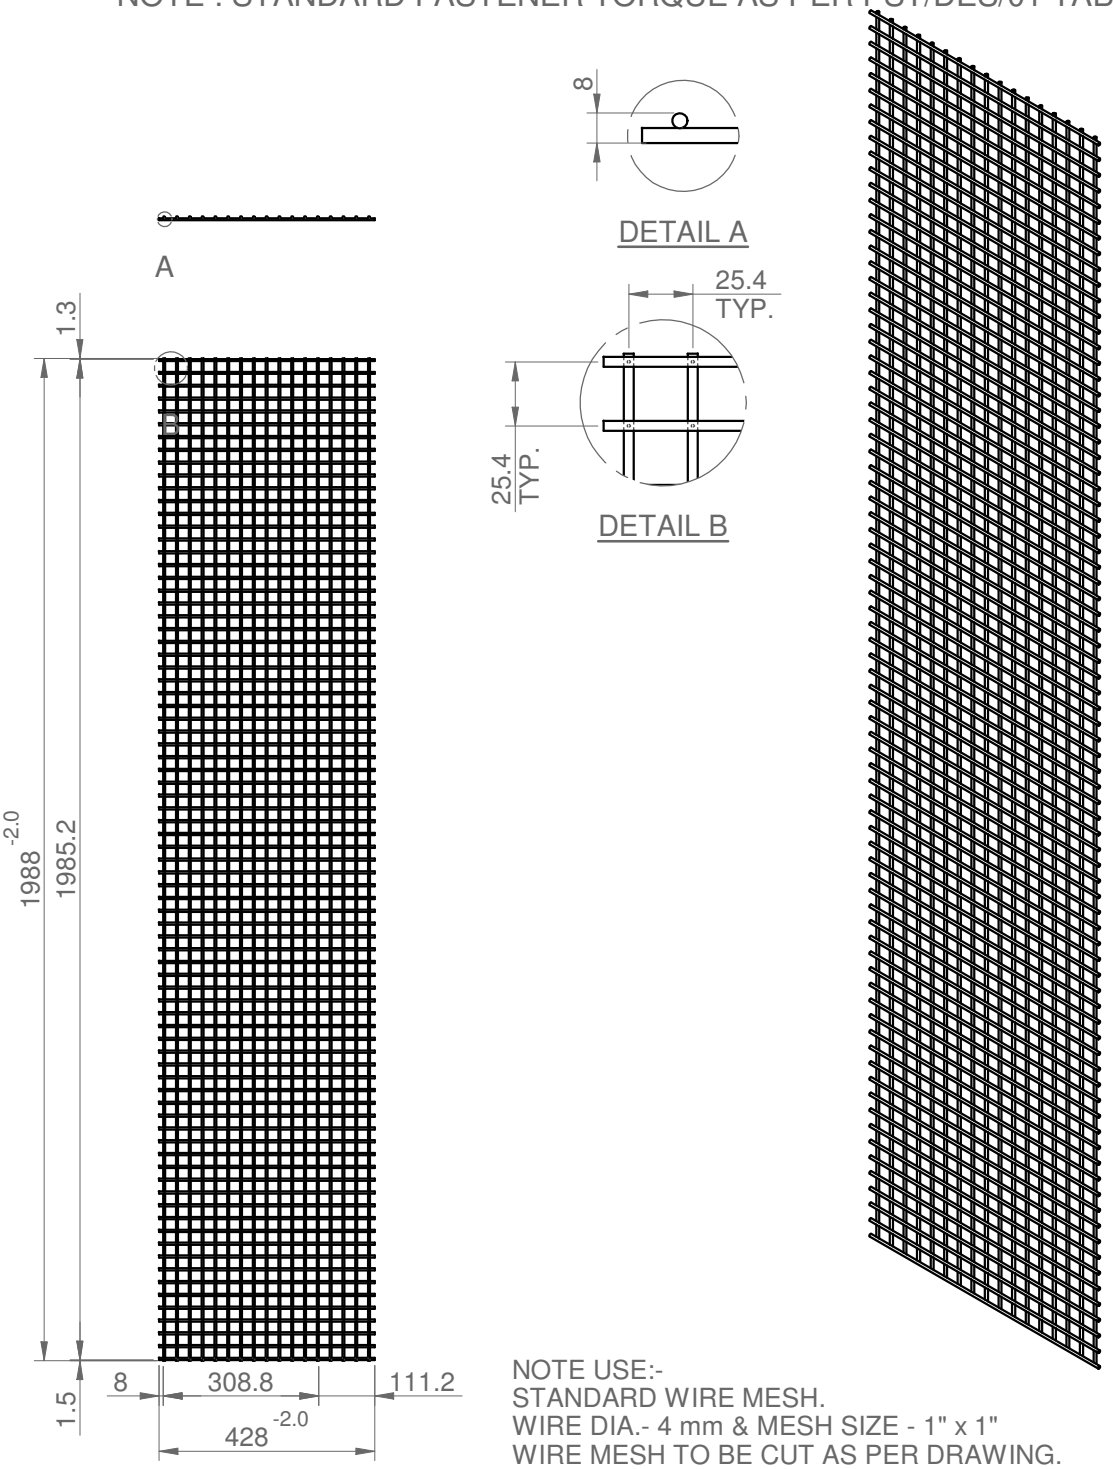

NOTE USE:-
STANDARD WIRE MESH.
WIRE DIA.- 4 mm & MESH SIZE - 1" x 1"
WIRE MESH TO BE CUT AS PER DRAWING.

UNSP.RADII 0.5 R
UNSP.CHF. 0.5 X 45°

UNSPECIFIED TOL.(M) FOR ANGULAR IN mm.	
UP TO 10	±1 °
10 UP TO 50	±0 °30'
50 UP TO 120	±0 °20'
120 UP TO 400	±0 °10'

UNSPECIFIED TOL.(M) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	CAR. NO.	DATE	CHKD.

PRECISION AUTOMATION & ROBOTICS INDIA LTD,Pune 41

PARI
www.parirobotics.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

PARENT DESCRIPTION : FIXED PANEL 500WX2000H
PARENT CODE : KGSW11200901

DESCRIPTION
WIRE MESH 1" x 1" FOR 500W

DRAWING TYPE
MACHINING

FINISH MTL.SIZE	FINISH	MACHINING	MATERIAL :	NET WEIGHT-Kg:	TEAM NO.	SHEET SIZE
AS PER DRG.	POWDER COATING		M.S	6.67 kg	PL-01	A4

DRN.BY	CHKD.BY	APPD.BY	REPLACES DWG.	DRG./PART CODE	REV.	SCALE
SANDIP	SRK		-	UEK000001120	00	1:15
03/09/2014			PART CLASS.			SHEET
DATE			C			1 OF 1

\parieng\STD\K Series\KGSW11\KGSW11200901\Part Assembly Drawings\UEK000001120.00.dft