

NOTE : STANDARD FASTENER TORQUE AS PER PST-DES-01 PFR-DES-07-REV-04

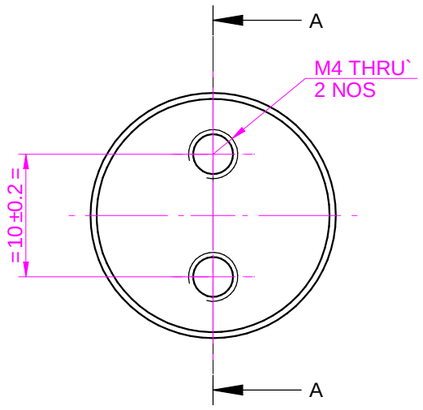

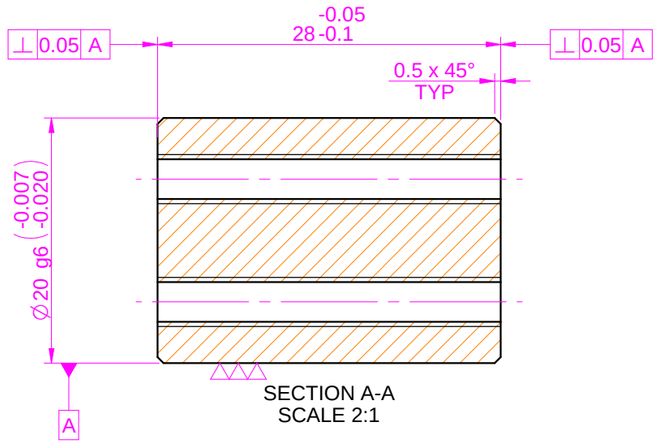

SECTION A-A
SCALE 2:1

HEAT TREATMENT :-
1) TO BE TOUGHENED UPTO 24-32 HRC.
2) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.(IF APPLICABLE)

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

wipro PARI
www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

RESERVED SPACE FOR CONTROLLED COPY STAMP

CONTROLLED COPY

WIPRO PARI PRIVATE LIMITED

[Formerly Known as Precision Automation and Robotics India Limited]

DESCRIPTION: **SHAFT**

DRAWING TYPE: MACHINING

SURFACE AREA	FINISH	MACHINING	MATERIAL	NET WEIGHT-Kg	TEAM NO.	SHEET SIZE
4.48 in^2	IZBP	▽▽(▽▽▽)	EN24	0.06 kg	PL-02	A3

SURFACE FINISH ▽▽▽▽ ▽▽▽ ▽▽ ▽ HEAT TREATMENT REF NOTE

DRN.BY	CHKD.BY	APPD.BY	REFERENCE DWG.	DRG./PART CODE	REV.	SCALE
NILESH W	KAPIL	VIVEK	PAT05A032203	P22A5B061018	0	2 : 1
26/06/2023	26/06/2023	26/06/2023	PART CLASS. B			SHEET 1 OF 1

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : M.W

\\pariengg\new\BT10ENGG\22-23\P22A5_Yanmar Engine Assm Line-02\ExDM Uploading\P22A5B061018.dft