

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 PFR-DES-07-REV-05

SR.NO	DESCRIPTION	LENGTH	WIDTH	THICKNESS	MATERIAL	QUANTITY	REMARKS	SURFACE AREA/QUANTITY
2	MAINTAINCE ROD	1200.00 mm			M.S. @	1	---	117.66 in^2
1	HEXAGON NUT_SW-30_H-1.5XD_M20_K0701.20_KIPP					1	05009NB02149 USE STD	0.00 in^2



TOP VIEW
SCALE/ECHELLE 1:5

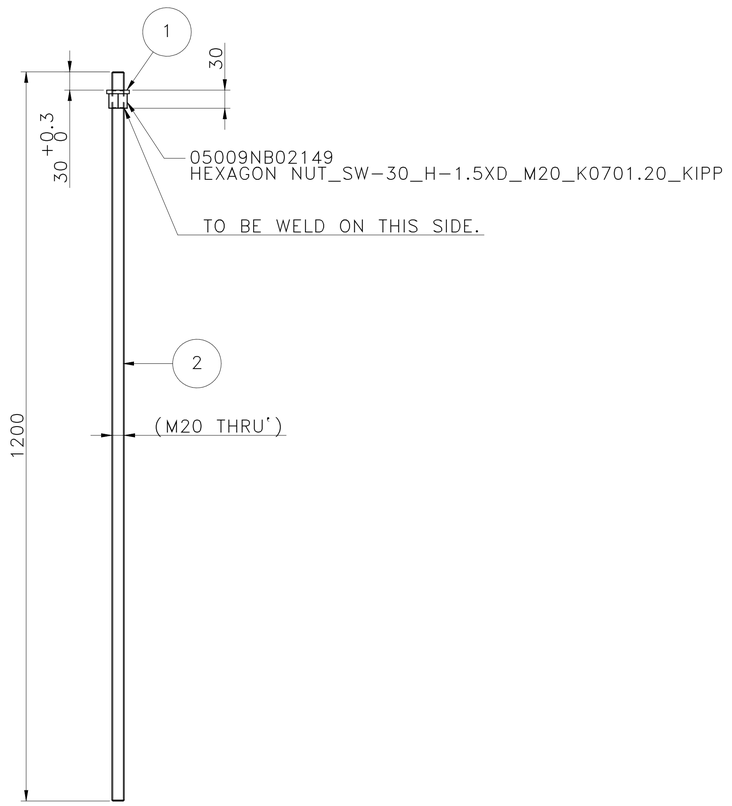

FRONT VIEW
SCALE/ECHELLE 1:5



GENERAL WELDING DETAILS FOR UNSPECIFIED WELD JOINTS

1) REFER TABLE FOR UNSPECIFIED BEAD SIZE.

UNSPECIFIED WELD BEAD SIZES IN mm		
MIN. PLATE / SECTION THICKNESS	BEAD SIZE FOR WELD CLASS C & D	BEAD SIZE FOR WELD CLASS B
UPTO 4	2	2
4 UPTO 8	3	4
8 UPTO 12	5	6
ABOVE 12	5	8

2) REFER TABLE BELOW FOR UNSPECIFIED WELD DETAILS.

WELD LENGTH (MM)	WELD CLASS C & D (WELD-PITCH)	WELD CLASS B (WELD-PITCH)
UPTO 250	FULL LENGTH WELD	FULL LENGTH WELD
250 TO 500	50-100	50-100
500 TO 1000	50-150	50-150
ABOVE 1000	100-200	100-200

3) FOR STITCH WELDING, APPLY 25 MM WELD ON END OF WELD SEAM UNLESS SPECIFIED.

PROOF MACHINING NOTE:-
ALL PROFILE CUT EDGES MUST BE PROOF MACHINED.

WELDING NOTES -
1) ALL JOINTS SHOULD BE AS PER TABLES "GENERAL WELDING DETAILS"
2) ALL CHILD PARTS TO BE STRAIGHTENED BEFORE WELDING
3) SUITABLE EDGE PREPARATION TO BE DONE BEFORE WELDING
4) FABRICATED STRUCTURE TOLERANCES SHOULD BE AS PER IS 2102 COARSE GRADE UNLESS SPECIFIED.
5) WELDING SHOULD BE NEAT & CLEAN
6) ALL WELDING JOINTS SHALL BE DRESSED PROPERLY
7) MASK MACHINED FACES (IF ANY) DURING PAINTING
8) WELD CLASS - "B"
9) STRESS RELIEVING - NOT APPLICABLE
10) SHOT BLASTING - APPLICABLE

INSPECTION NOTES -
1) DYE PENETRATION TEST FOR WELDING - NOT APPLICABLE
2) ULRASONIC TESTING FOR FINISH JOB - NOT APPLICABLE
3) LEAK PROOF WELD JOINT - NOT REQUIRED

@ MATERIAL GRADE/CLASS SHOULD BE 12.9

NOTE :-(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :-(French)
EBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE : (English)
MATERIAL: REF BOM & NOTE
FINISH: ZINC PLATING BLUE PASSIVATION
MACHINING: 50(12.5/)
WEIGHT(Kg): 3.08 kg

NOTE :-(French)
MATÉRIEL : REF BOM & NOTE
FINITION : ZINC PLATING BLUE PASSIVATION
MACHINES : 50(12.5/)
POIDS (Kg): 3.08 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

RESERVED SPACE FOR CONTROLLED COPY

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY

WIPRO PARI GROUP
www.wipropari.com

DESCRIPTION: MAINTAINCE ROD-4
DRAWING TYPE: FAB/MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
127.58 in^2	#	#	WPP	0100	PL-02	A1

REFERENCE DWG. P2207012111053 | PART CLASS. B | HEAT TREATMENT ---


DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006598	5489	03002882	#	P23M5B154364	00	1 : 5
19/08/2024	19/08/2024	19/08/2024	NET WEIGHT-Kg 3.08 kg			SHEET 1 OF 2

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01043\E:\DM Uploading\2022--23\P2375\P23I75B154364.dft

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 PFR-DES-07-REV-05

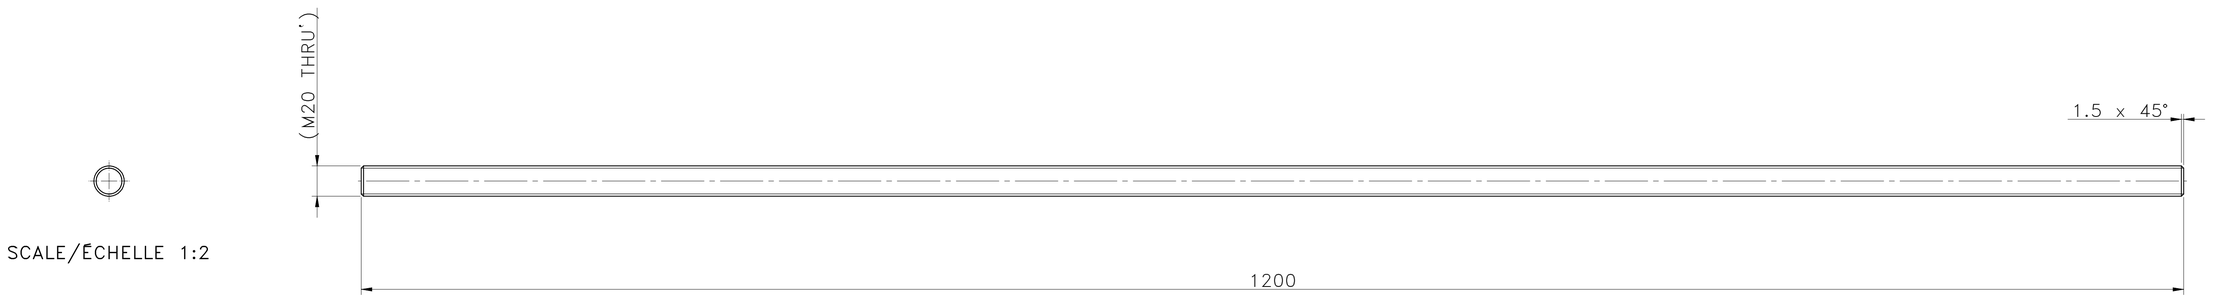

SCALE/ÉCHELLE 1:2

2 DETAIL VIEW ~(▽)
SCALE/ÉCHELLE 1:2

@ MATERIAL GRADE/CLASS SHOULD BE 12.9

NOTE : (English)
MATERIAL: REF BOM & NOTE
FINISH: ZINC PLATING BLUE PASSIVATION
MACHINING: 50(12.5)
WEIGHT(Kg): 3.08 kg

NOTE :-(French)
MATÉRIEL : REF BOM & NOTE
FINITION : ZINC PLATING BLUE PASSIVATION
MACHINES : 50(12.5)
POIDS (Kg): 3.08 kg

RESERVED SPACE FOR CONTROLLED COPY

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP RADII 0.5 R	UNSP CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(MIC) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

wipro PARI
www.wipropari.com
1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: **MAINTAINCE ROD-4**

DRAWING TYPE: FAB/MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
127.58 in^2	#	#	WPP	0100	PL-02	A1

REFERENCE DWG. P2207012111053 | PART CLASS. B | HEAT TREATMENT ---

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006598	5489	03002882	#	P23M5B154364	00	1 : 5
19/08/2024	19/08/2024	19/08/2024	NET WEIGHT-Kg 3.08 kg			SHEET 2 OF 2

\\srv01043\E,DM Uploading\2022--23\P23Y5\P23Y5B154364.dft