

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

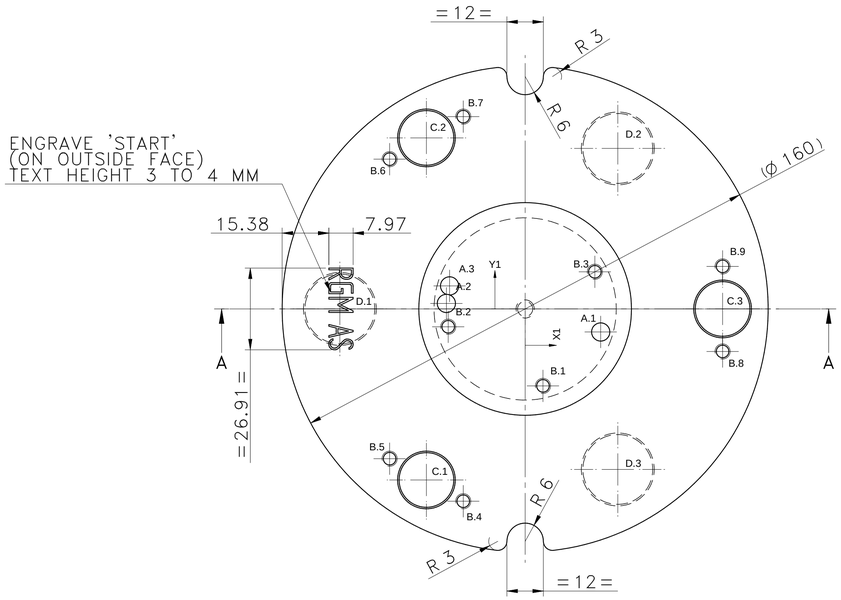


SCALE/ÉCHELLE 1:1




SCALE/ÉCHELLE 1:2

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	24.87	−7.58	Ø 6.00 mm x 10.00 mm DEEP	H7
A.2	−25.94	1.81	Ø 6.00 mm x 12.00 mm DEEP	H7
A.3	−24.87	7.58	Ø 6.00 mm x 10.00 mm DEEP	H7
B.1	5.87	−25.33	M5 x 22.00 mm DEEP	
B.2	−25.33	−5.87	M5 x 22.00 mm DEEP	
B.3	22.95	12.23	M5 x 22.00 mm DEEP	
B.4	−20.38	−63.29	M5 x 15.00 mm DEEP	
B.5	−44.62	−49.29	M5 x 15.00 mm DEEP	
B.6	−44.62	49.29	M5 x 15.00 mm DEEP	
B.7	−20.38	63.29	M5 x 15.00 mm DEEP	
B.8	65.00	−14.00	M5 x 15.00 mm DEEP	
B.9	65.00	14.00	M5 x 15.00 mm DEEP	
C.1	−32.50	−56.29	Ø 18.00 mm THRU'	REF SECTION A−A
C.2	−32.50	56.29	Ø 18.00 mm THRU'	REF SECTION A−A
C.3	65.00	0.00	Ø 18.00 mm THRU'	REF SECTION A−A
D.1	−61.00	0.00	Ø 23.00 mm x 9.00 mm DEEP	REF DETAIL B'
D.2	30.50	52.83	Ø 23.00 mm x 9.00 mm DEEP	REF DETAIL B'
D.3	30.50	−52.83	Ø 23.00 mm x 9.00 mm DEEP	REF DETAIL B'

TOLERANCE NOTE :−
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN±0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN ±0.2.

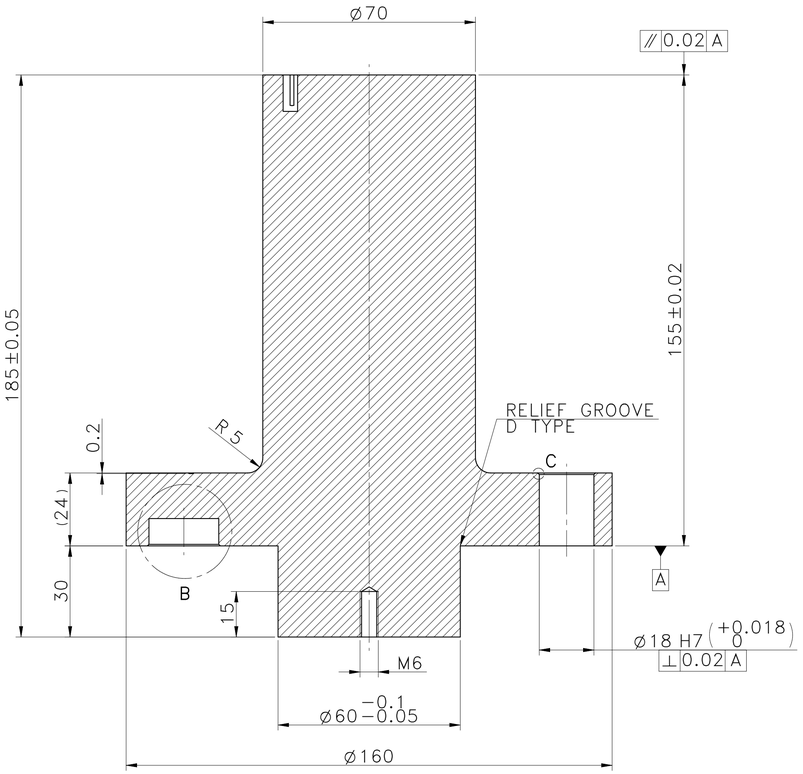


SECTION A−A
SCALE/ÉCHELLE 1:1



DETAIL B
SCALE/ÉCHELLE 2:1



DETAIL D
SCALE/ÉCHELLE 4:1



DETAIL C
SCALE/ÉCHELLE 4:1

NOTE :−(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :−(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

HEAT TREATMENT :−
1) TO BE TOUGHENED UPTO 28−32 HRC.
2) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.(IF APPLICABLE)

NOTE : (English)
MATERIAL: Steel − Unalloyed:1.0503 , C45
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2
WEIGHT(Kg): 8.07 kg

NOTE :−(French)
MATÉRIEL : Steel − Unalloyed:1.0503 , C45
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2
POIDS (Kg): 8.07 kg

RESERVED SPACE FOR CONTROLLED COPY

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(MIC) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

WIPRO PARI GROUP

www.wipropari.com

DESCRIPTION: tool support - 1

DRAWING TYPE: MACHINING

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
145.16 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG.	---	PART CLASS. B	HEAT TREATMENT	REF NOTE

LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006751	03004785	03002882	#	P23Y5B071033	00	2 : 1
08/05/2024	08/05/2024	08/05/2024	NET WEIGHT-Kg 8.07 kg			SHEET 1 OF 1

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : MW

\\srv01102\Ex-DM_Uploading\2022-23\P23Y5\P23Y5B071033.dft