

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

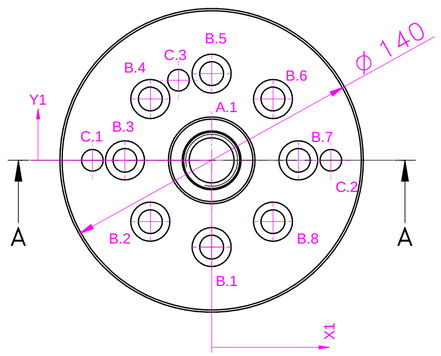


SCALE/ÉCHELLE 1:2




SCALE/ÉCHELLE 1:2

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	M24 x 54.00 mm DEEP	
B.1	0.00	−40.00	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm – 10.80 mm DEEP	REF SE A–A
B.2	−28.28	−28.28	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm – 10.80 mm DEEP	REF SE A–A
B.3	−40.00	0.00	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm – 10.80 mm DEEP	REF SE A–A
B.4	−28.28	28.28	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm – 10.80 mm DEEP	REF SE A–A
B.5	0.00	40.00	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm – 10.80 mm DEEP	REF SE A–A
B.6	28.28	28.28	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm – 10.80 mm DEEP	REF SE A–A
B.7	40.00	0.00	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm – 10.80 mm DEEP	REF SE A–A
B.8	28.28	−28.28	Ø 11.00 mm THRU' C'BORE Ø 18.00 mm – 10.80 mm DEEP	REF SE A–A
C.1	−55.00	0.00	Ø 10.00 mm THRU'	H7 (REF SEC'A–A')
C.2	55.00	0.00	Ø 10.00 mm THRU'	H7 (REF SEC'A–A')
C.3	−15.31	36.96	Ø 10.00 mm THRU'	H7 (REF SEC'A–A')

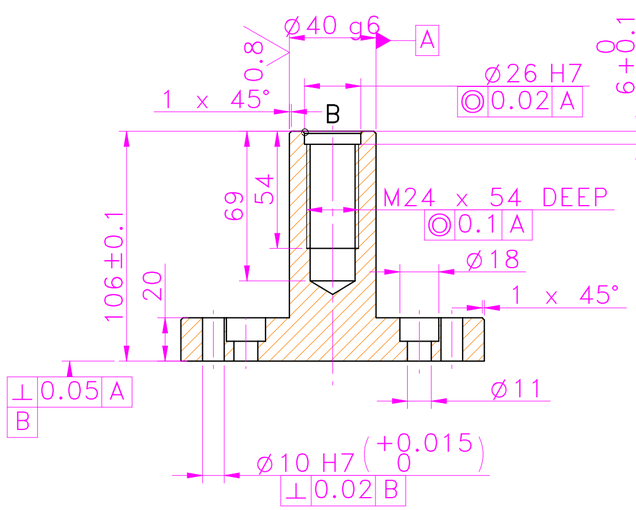

SECTION A–A
SCALE/ÉCHELLE 1:2



DETAIL B
SCALE/ÉCHELLE 5:1

1 HEAT TREATMENT :–(English)
1) TO BE HARDENED UPTO 32–35 HRC.
2) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.(IF APPLICABLE)

TRAITEMENT DE CHALEUR :– (French)
1) A RENFORCER JUSQUDA 32–35 HRC.
2) RE–TARAUDAGE A FAIRE APRÈS TRAITEMENT DE SURFACE CHEZ LE FOURNISSEUR (SOIL Y A LIEU)

TOLERANCE NOTE:–

ALL H7 HOLES C.D. SHOULD BE CONTROLLED WITHIN ±0.02 / IT7
ALL HOLES,TAP & COUNTER BORE C.D. SHOULD BE CONTROLLED WITHIN ± 0.2

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

NOTE : (English)
MATERIAL: EN24 1
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2 (0.8)
WEIGHT(Kg): 2.79 kg

NOTE :–(French)
MATÉRIEL : EN24
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2 (0.8)
POIDS (Kg): 2.79 kg

RESERVED SPACE FOR
CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY
1	NOTE CHANGED	30.05.2024	03007272

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: PRESS BOTTOM PLATE
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
96.10 in^2	#	#	WPES	0300	PL-02	A2

REFERENCE DWG. | PART CLASS. B | HEAT TREATMENT

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006128	03004785	03002882	#	P23Y5B071049	01	1 : 2
30/05/2024	30/05/2024	30/05/2024	NET WEIGHT-Kg 2.79 kg			SHEET 1 OF 1

\\srv01043\ExDM Uploading\2022–23\P23Y5\P23Y5B071049.dft