NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

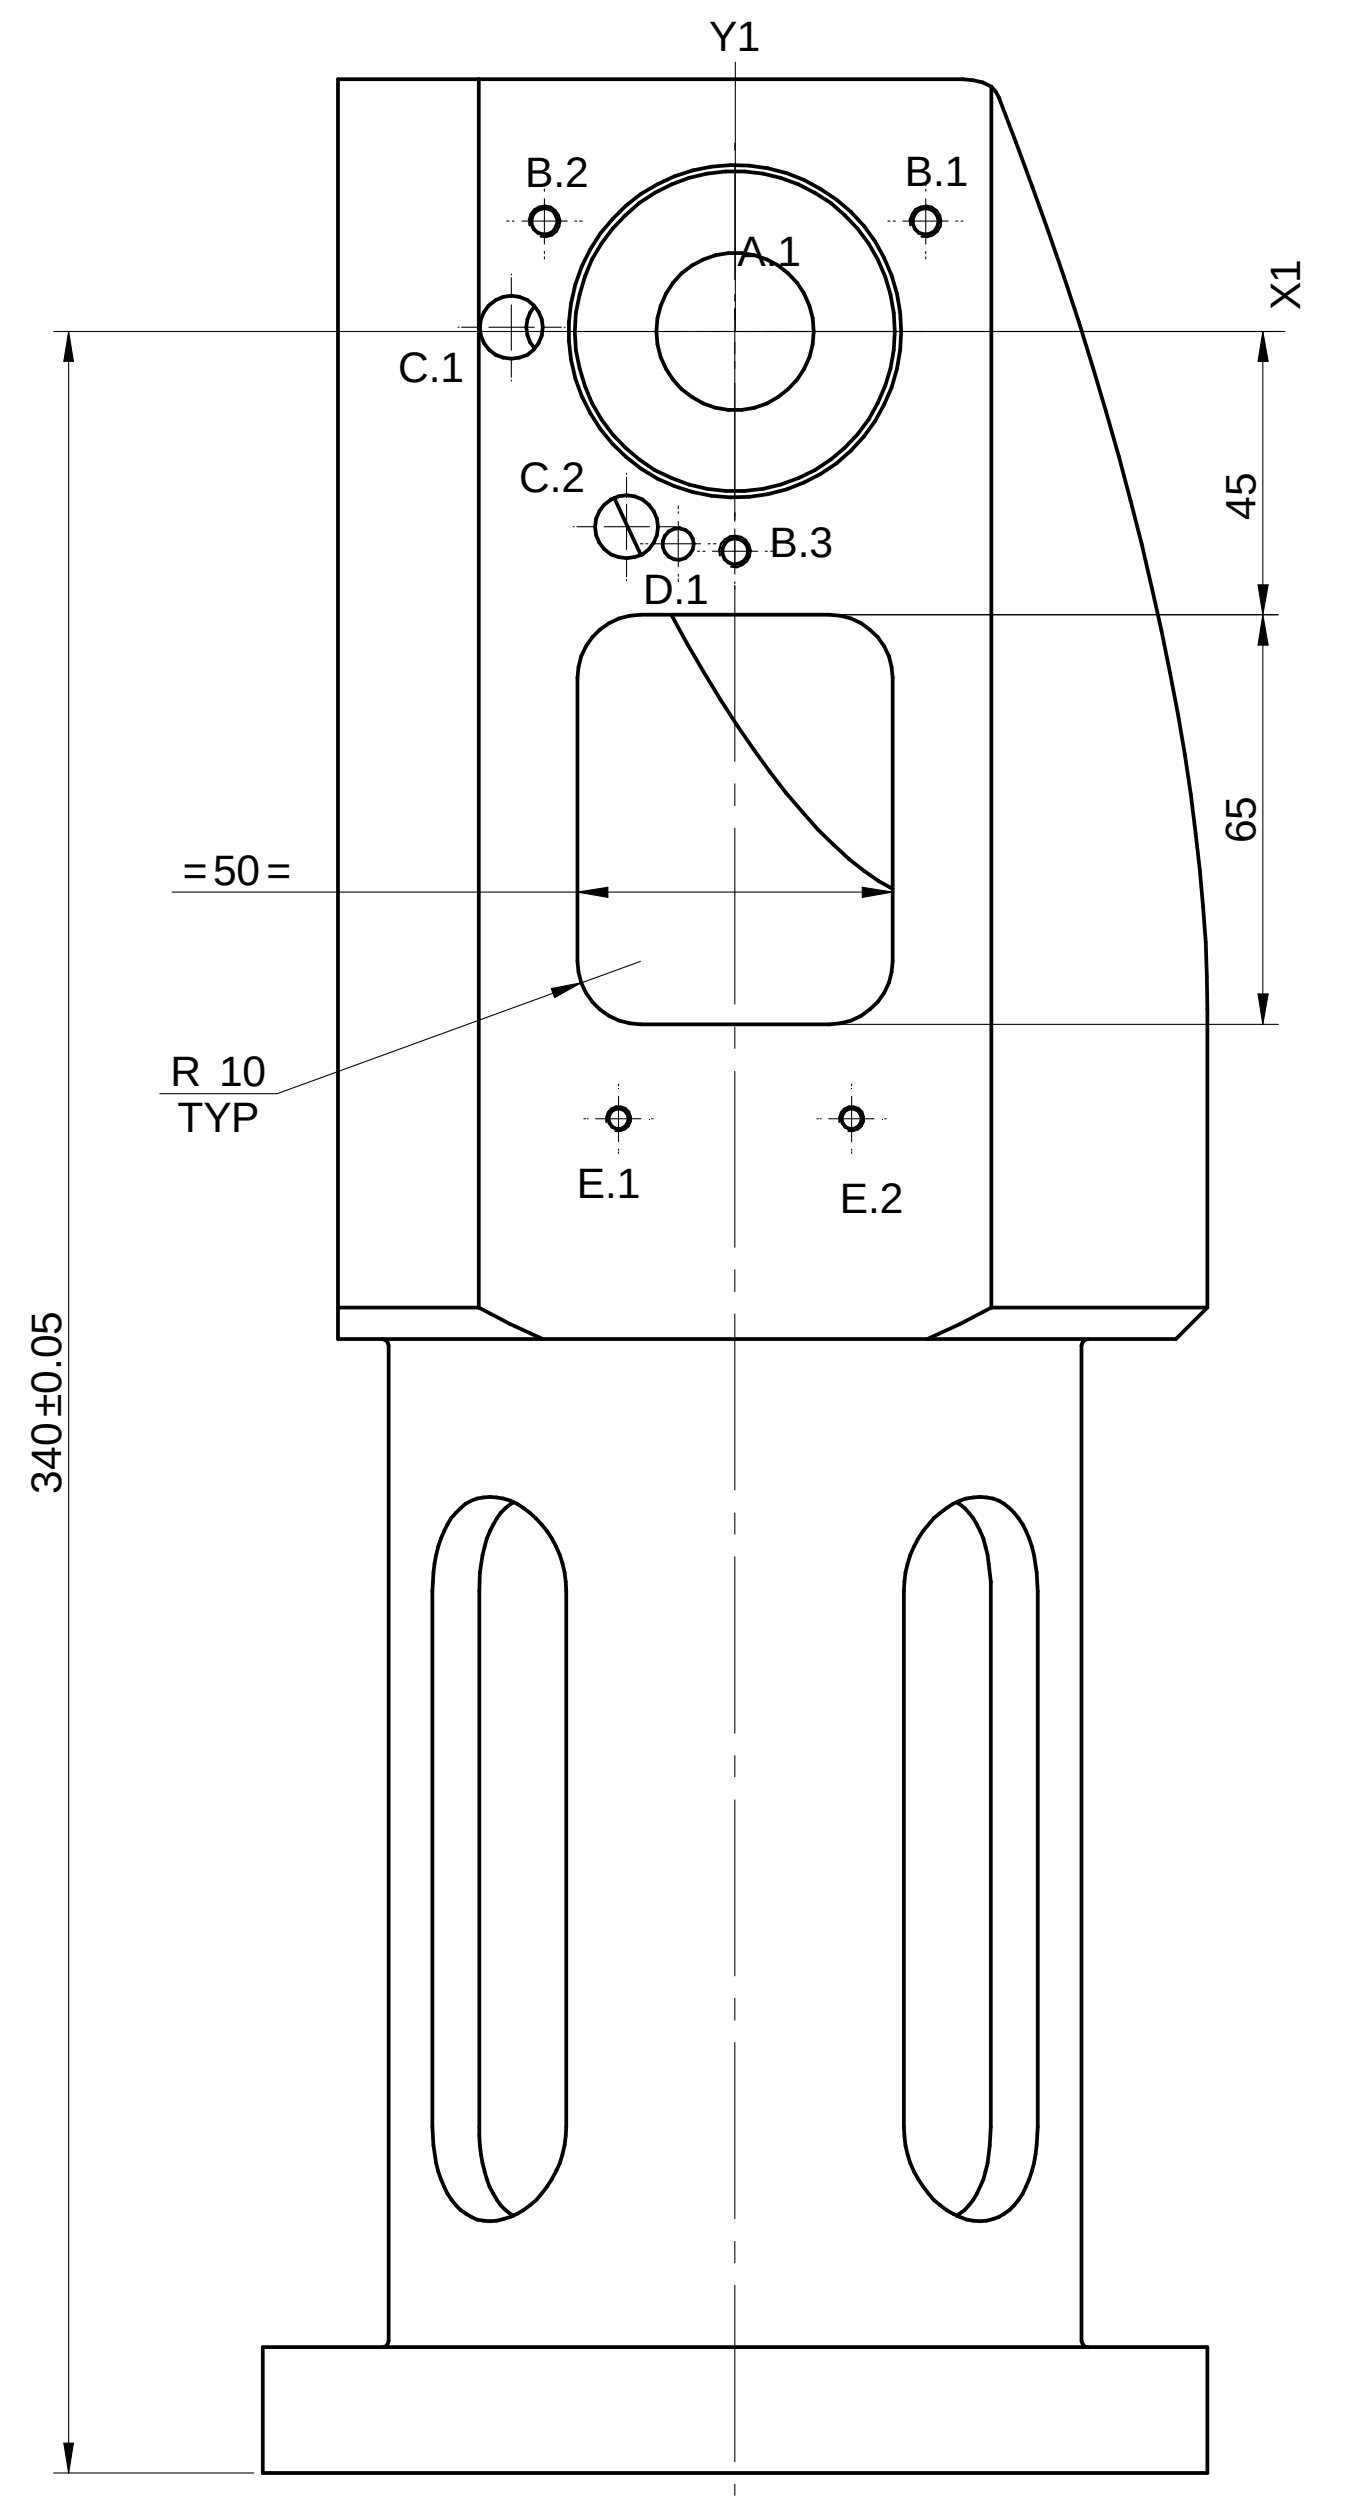

VIEW B
SCALE 1:2

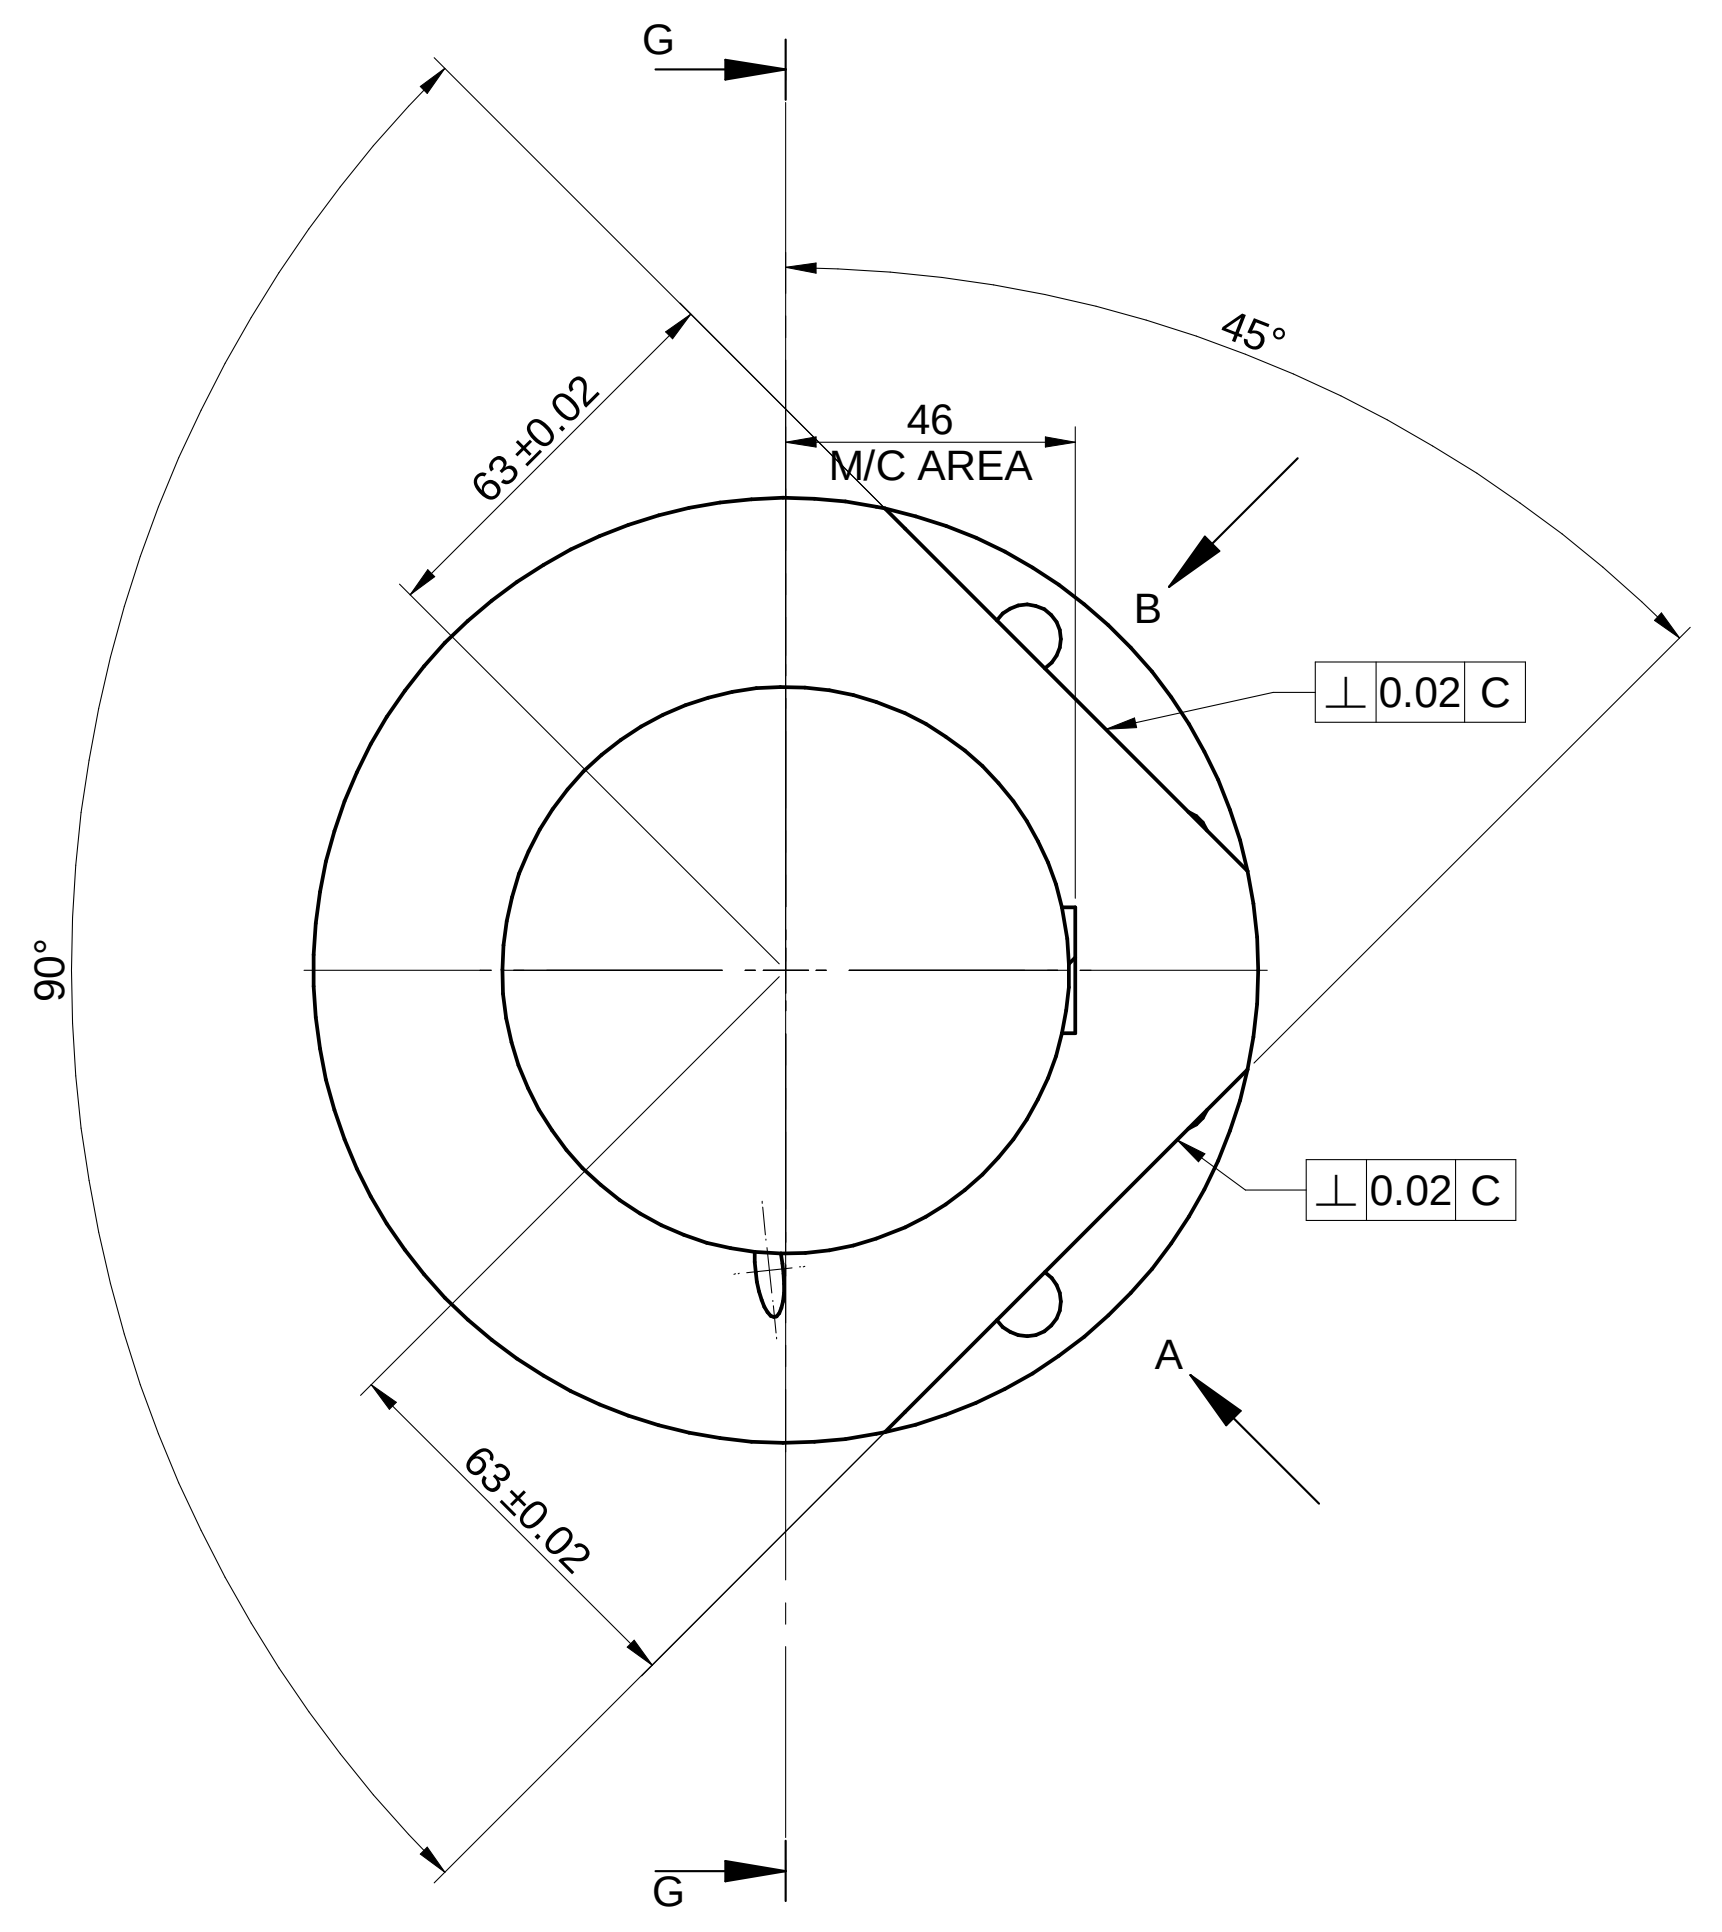

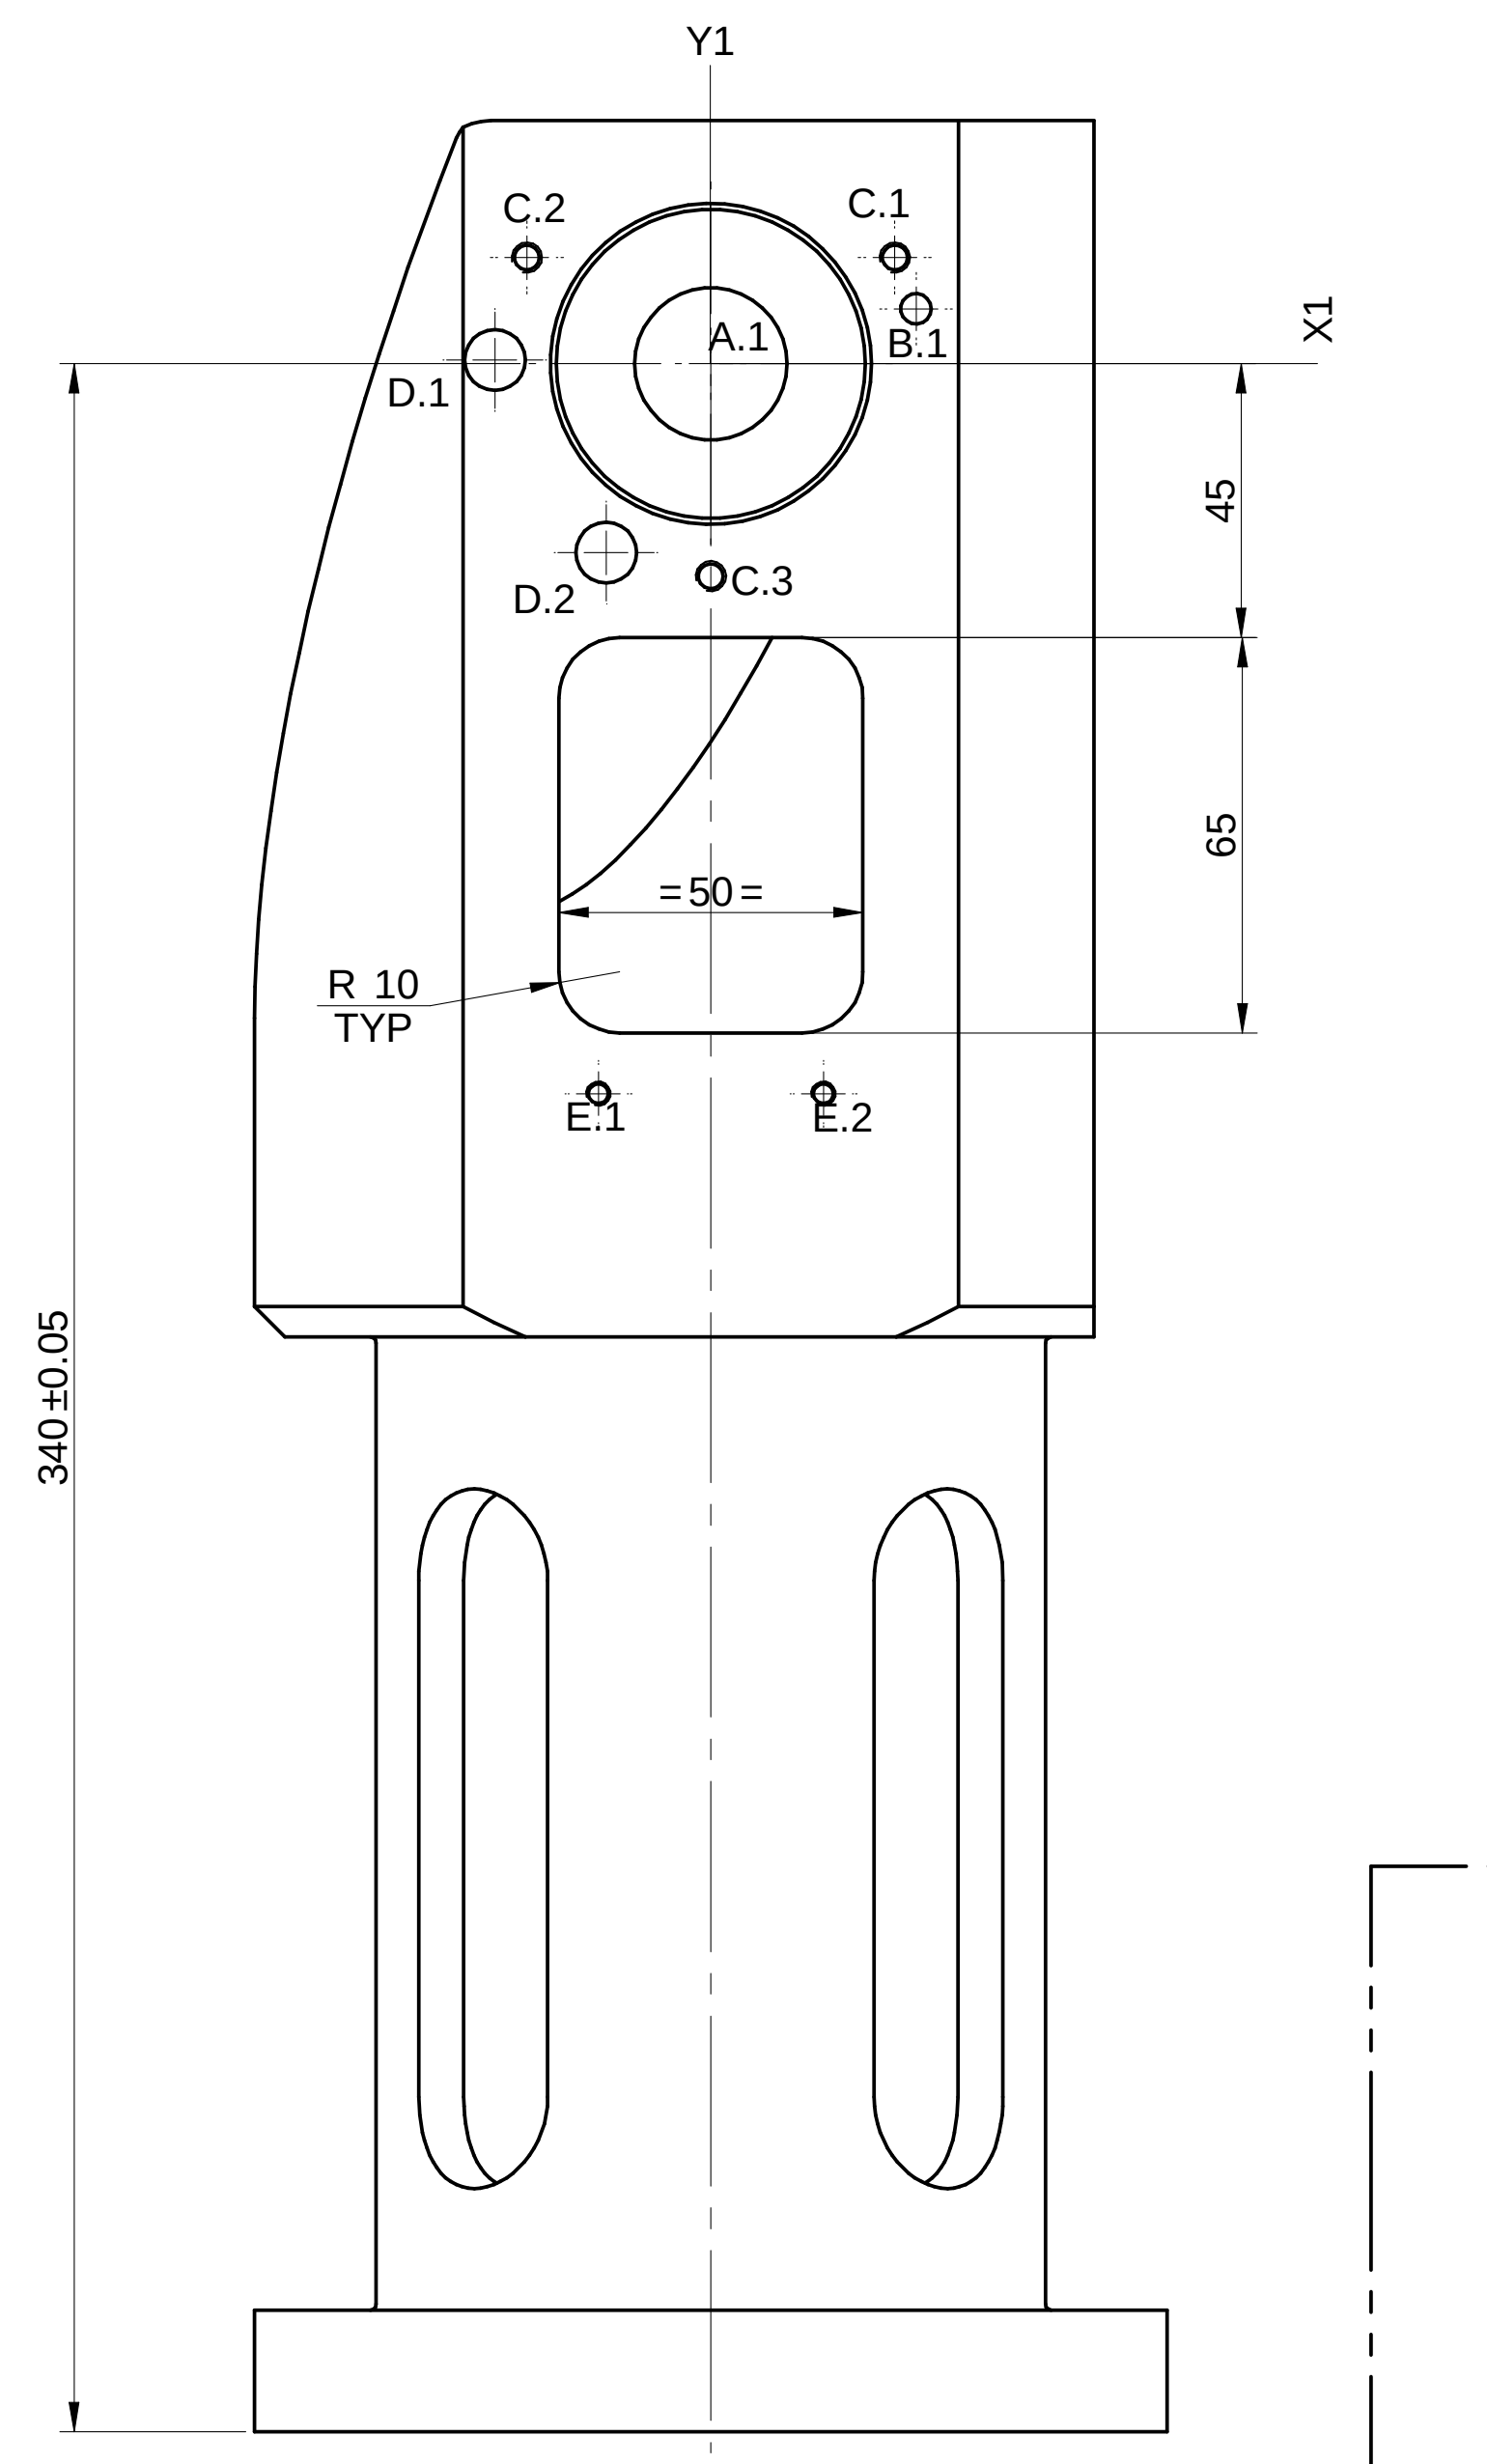

VIEW A
SCALE 1:2

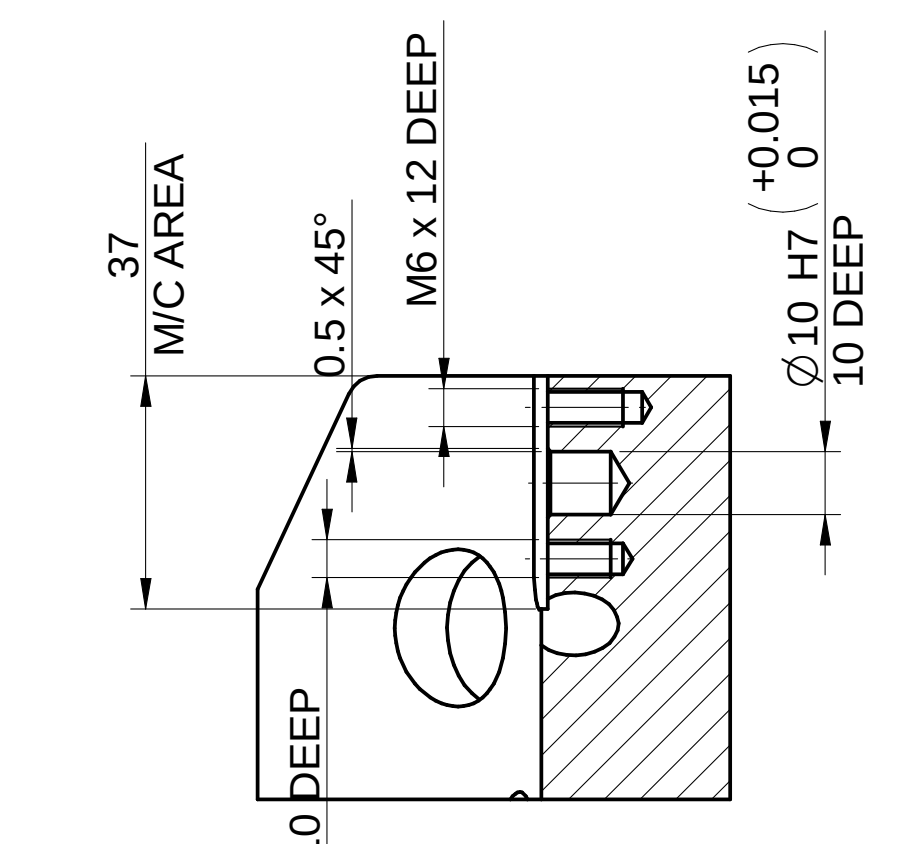

SECTION H-H
SCALE 1:2

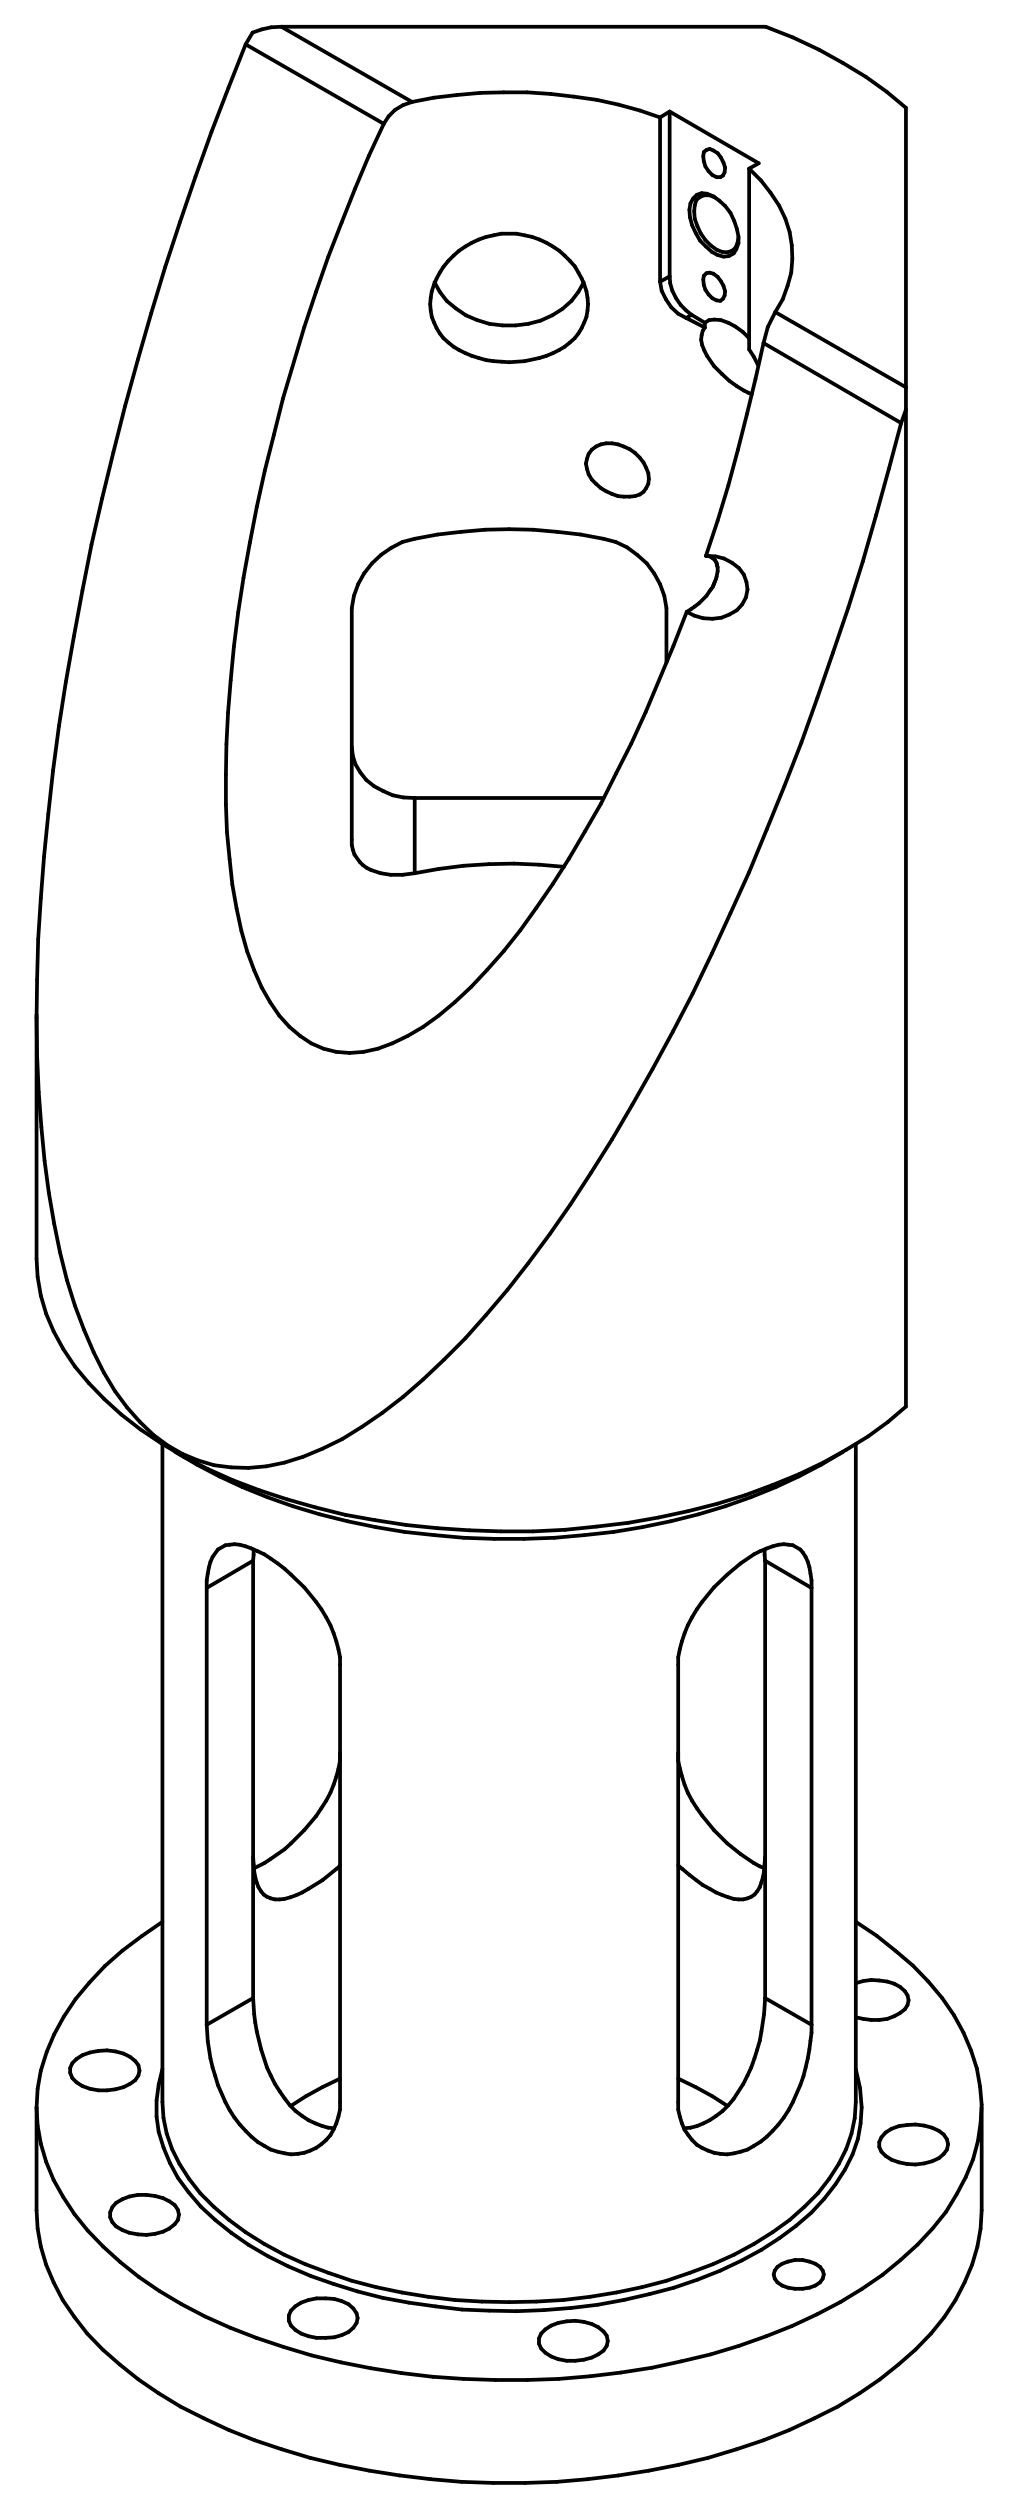

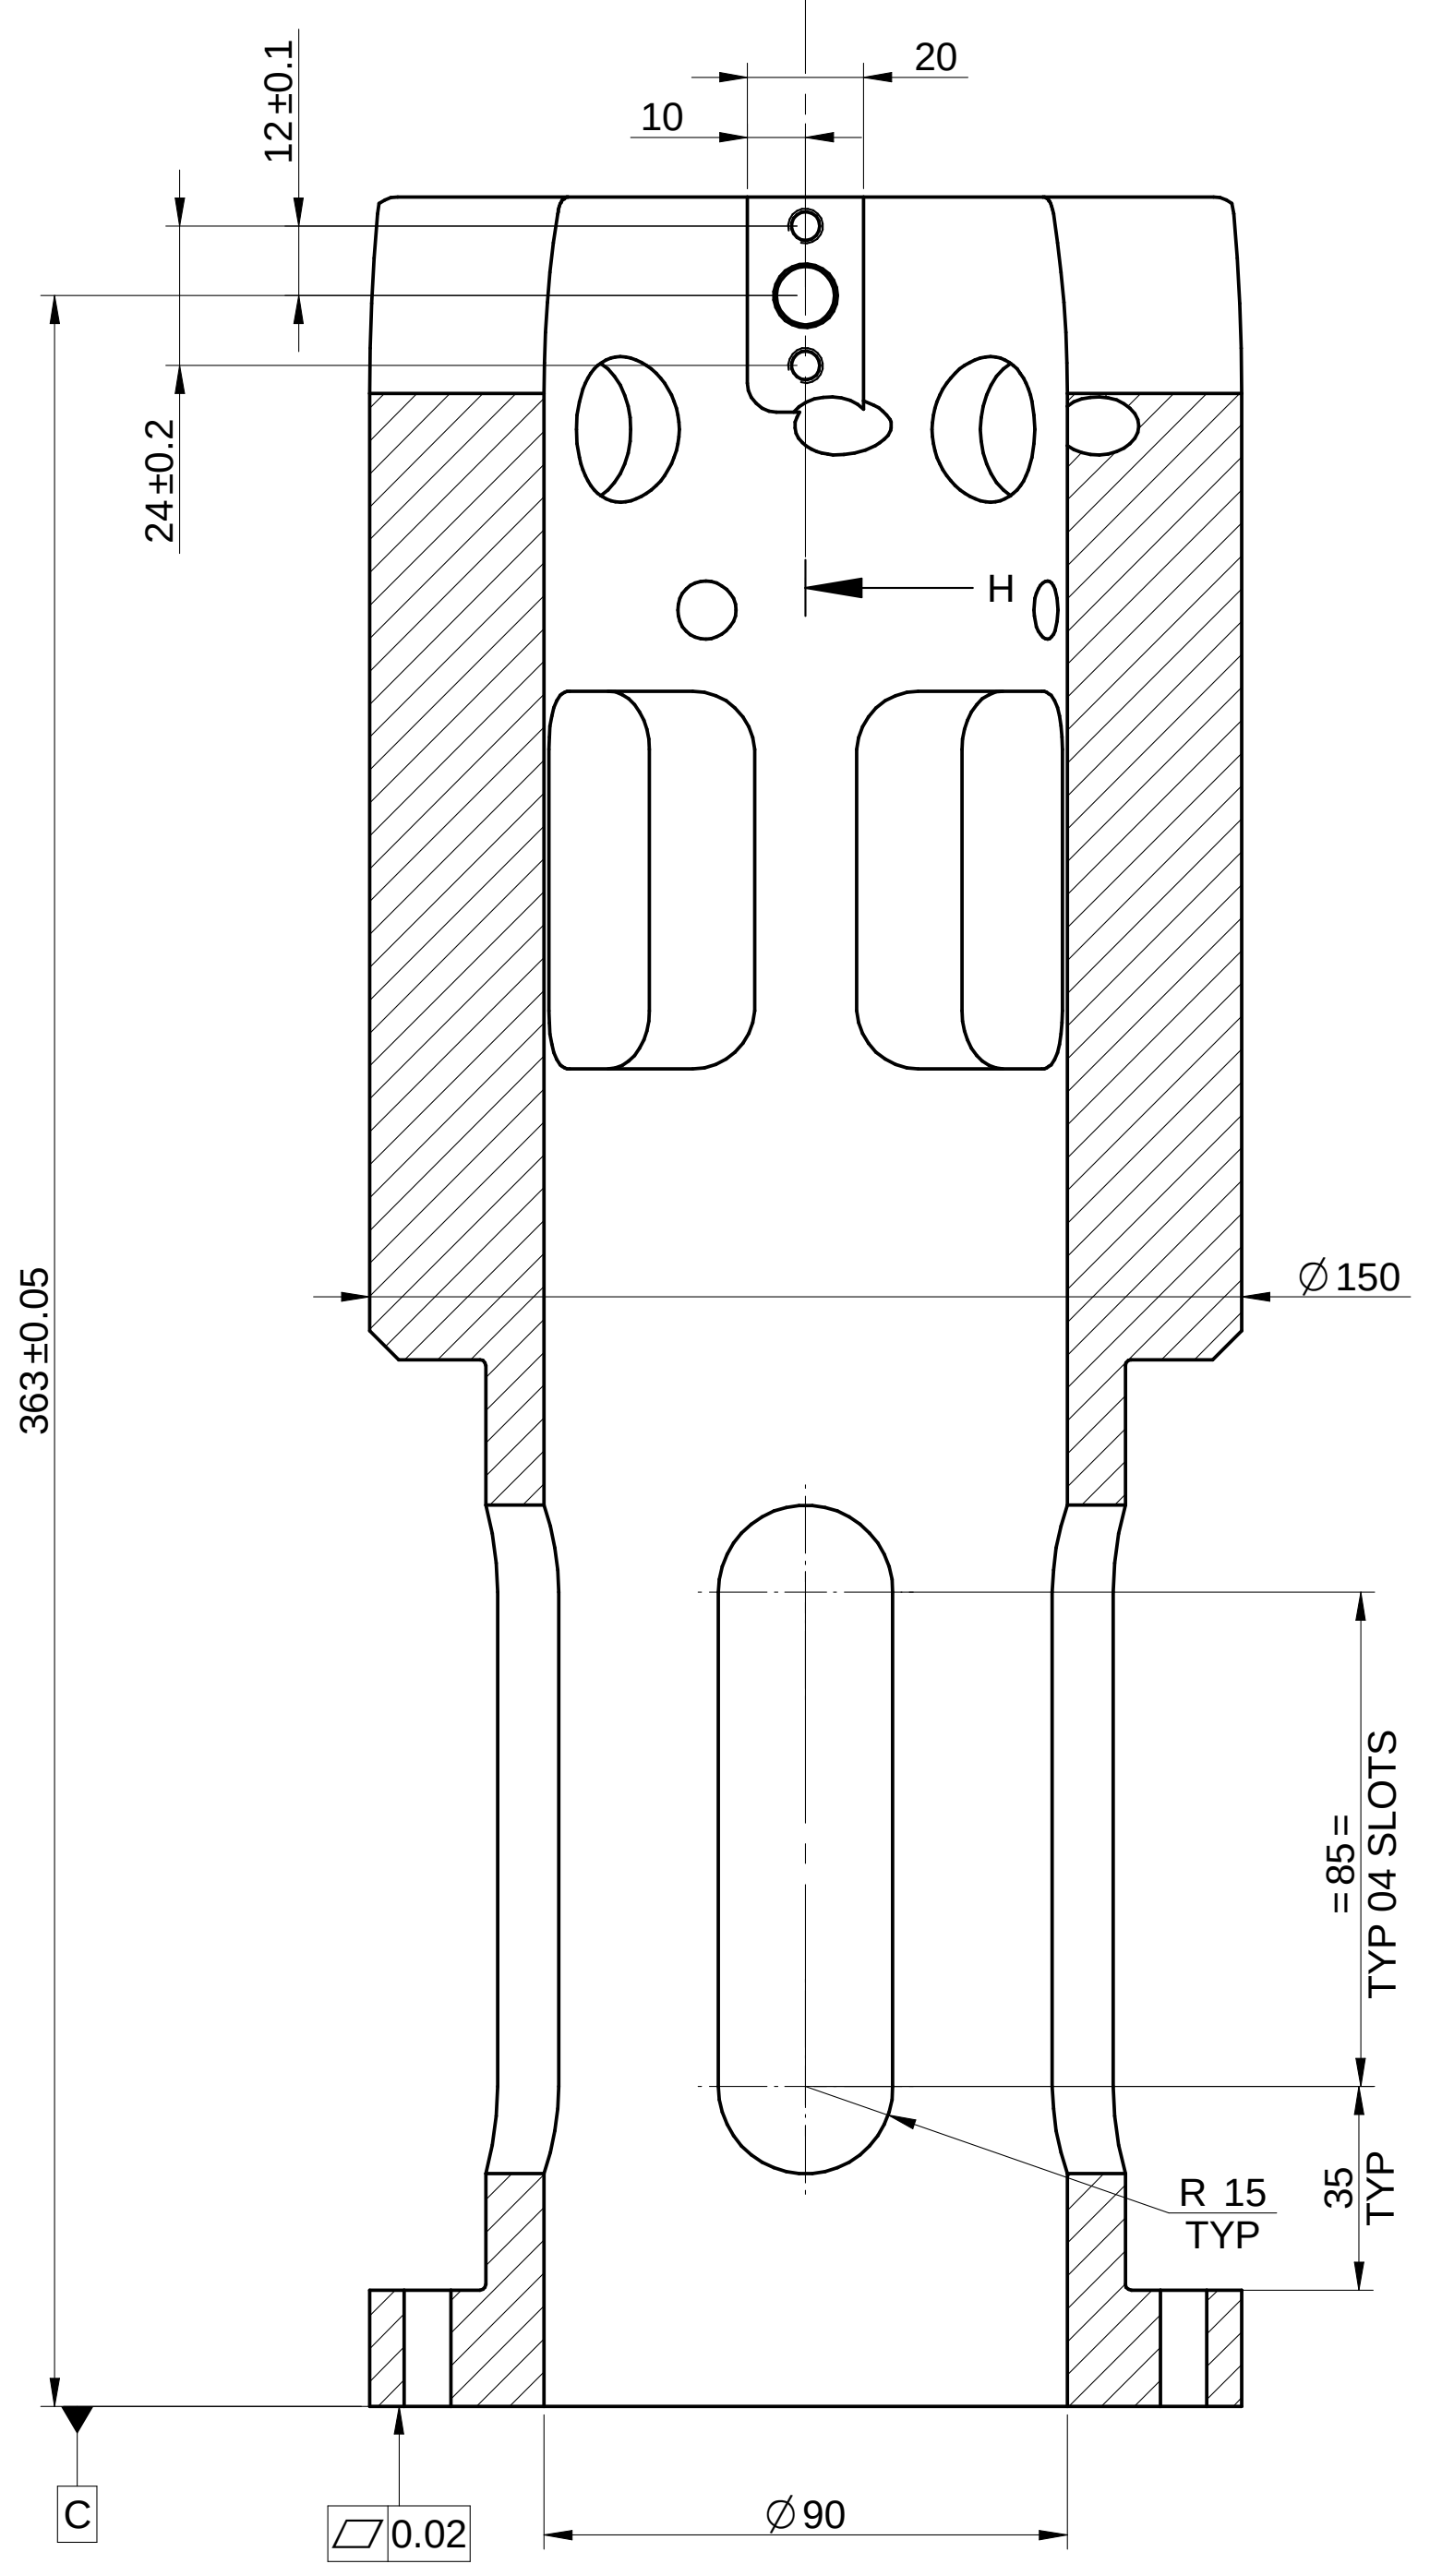

SECTION G-G
SCALE 1:2

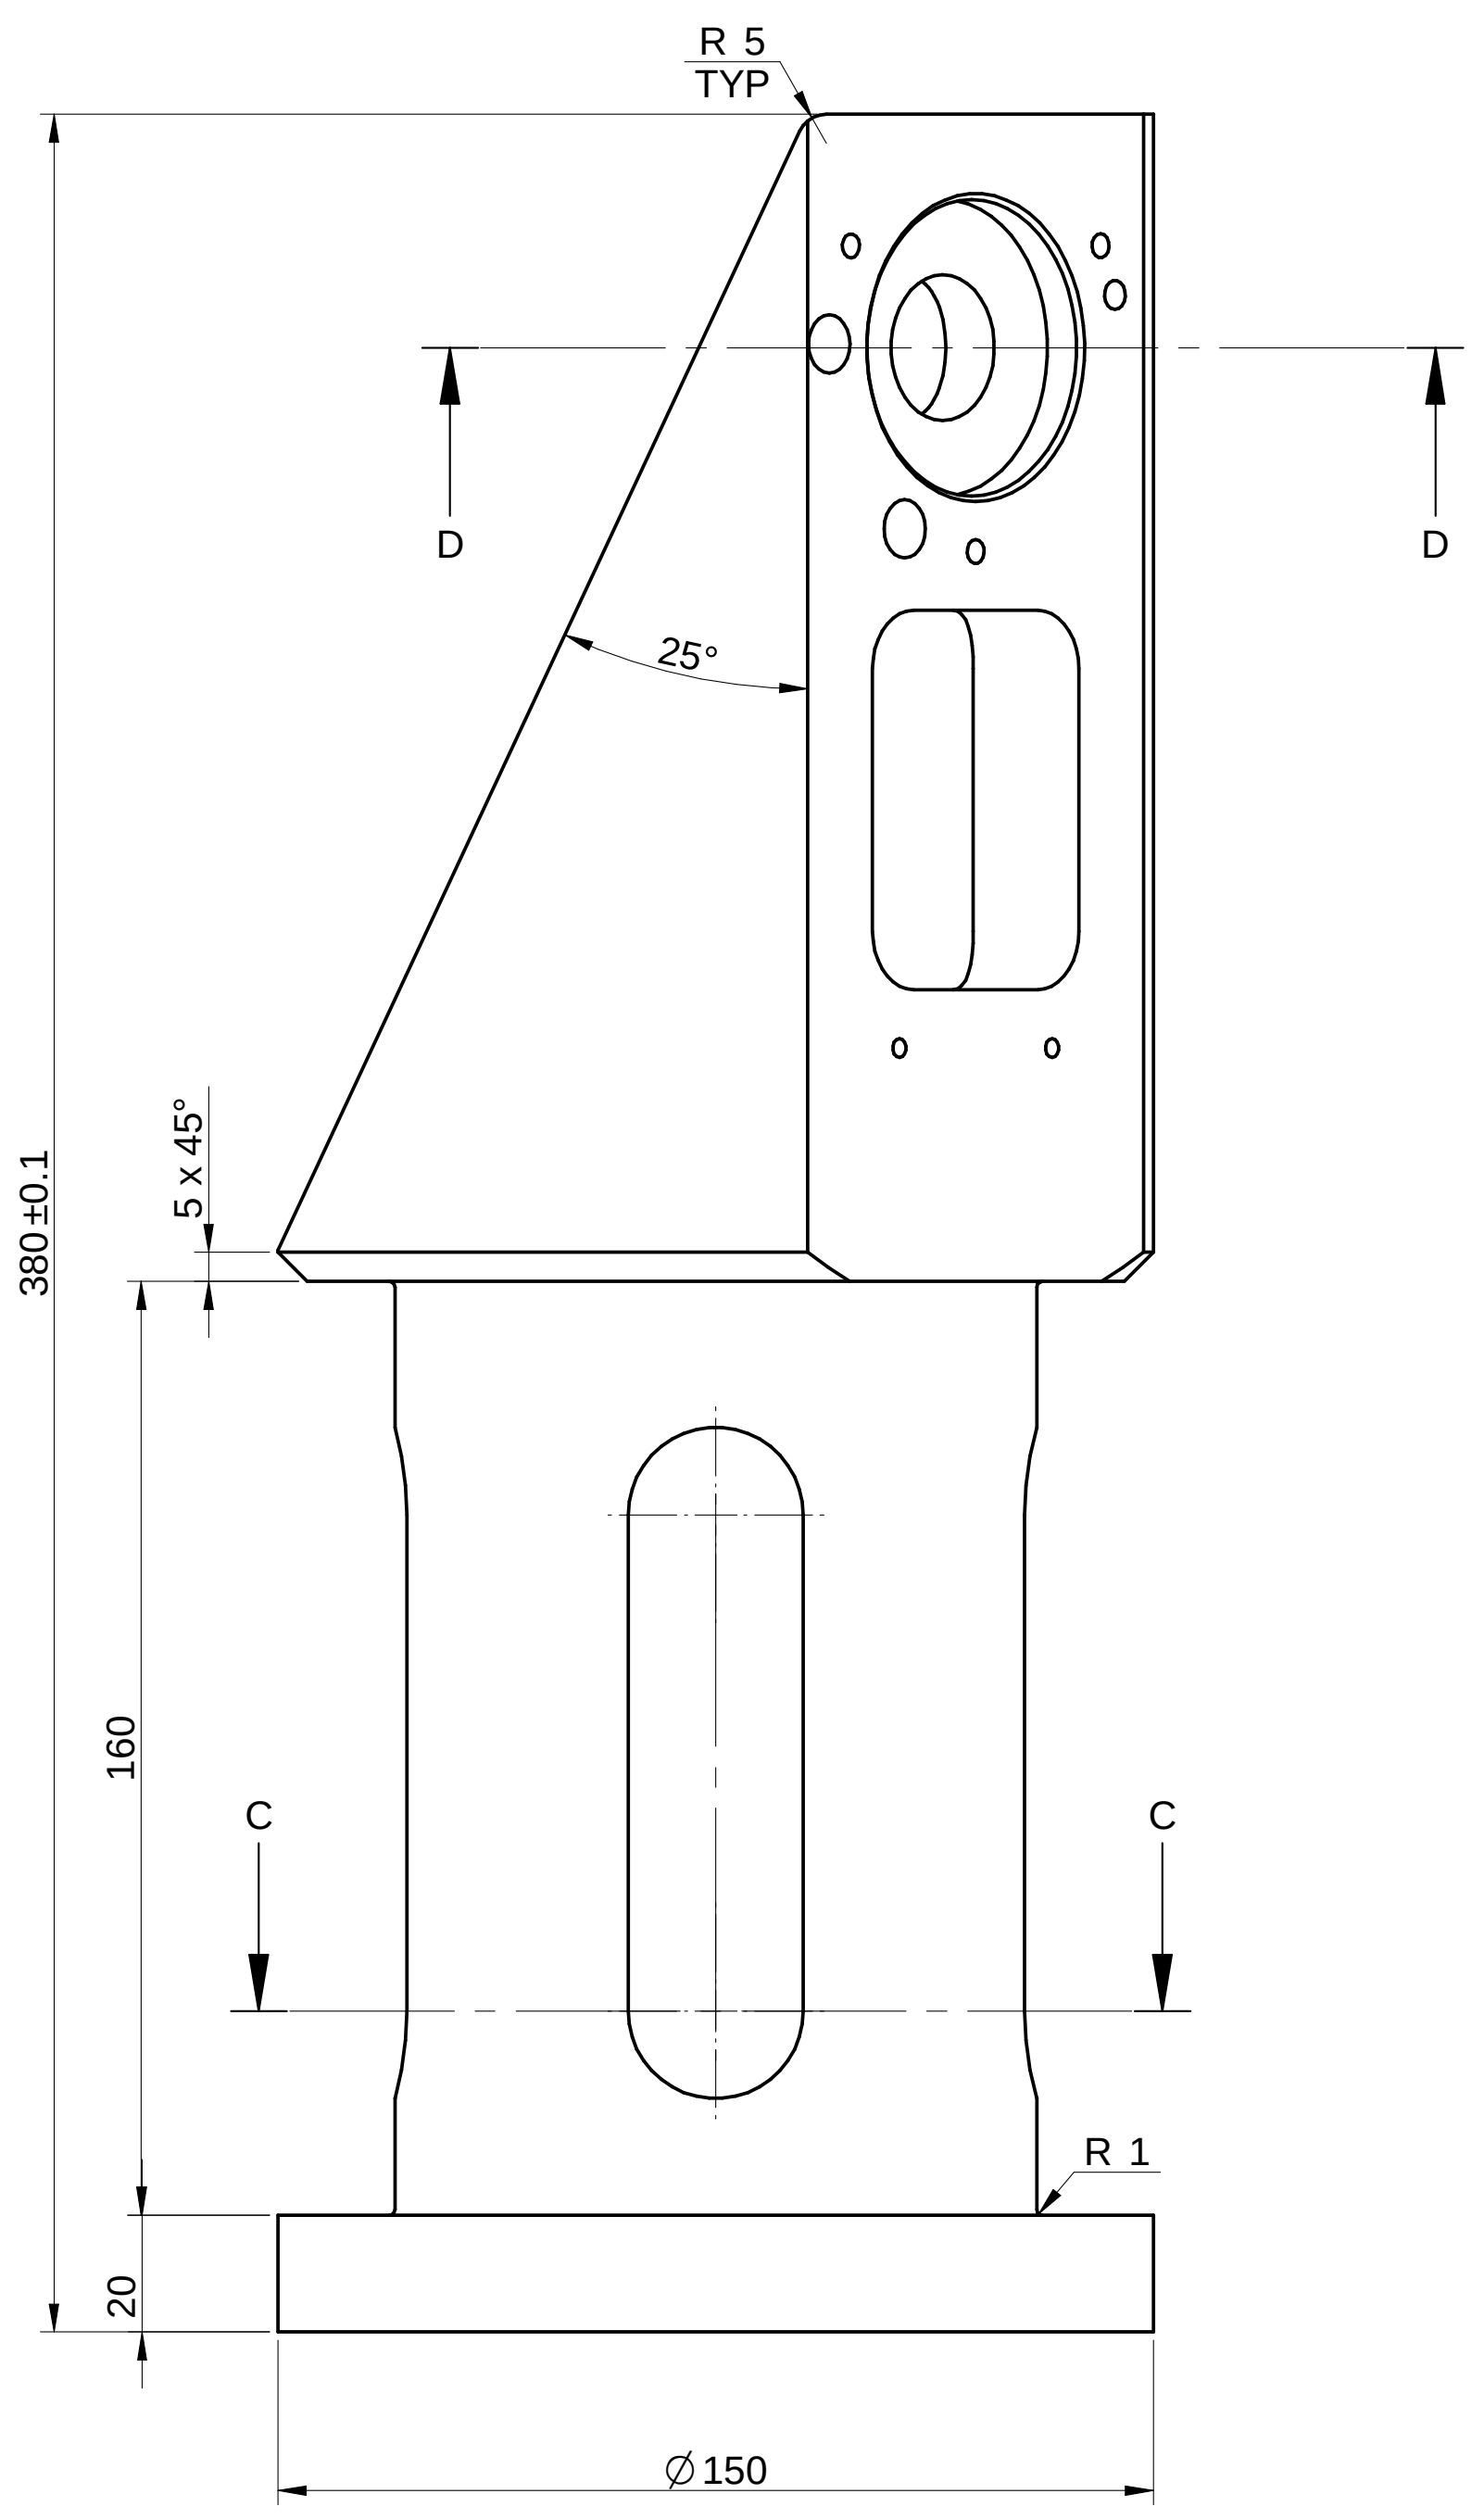

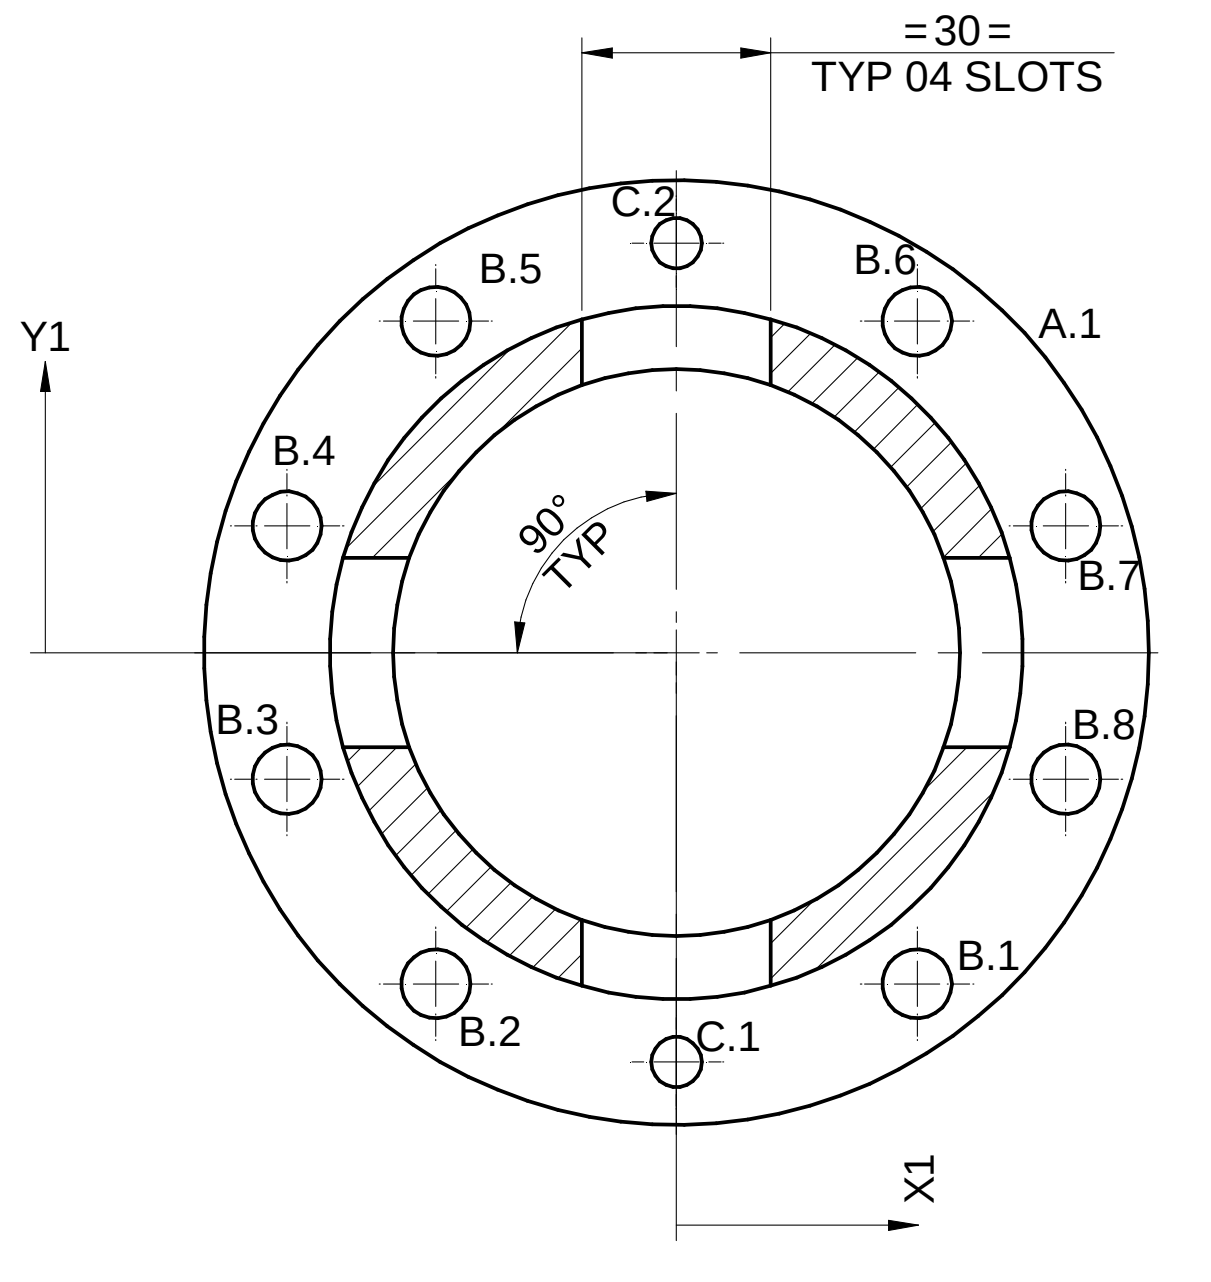

SECTION C-C
SCALE 1:2

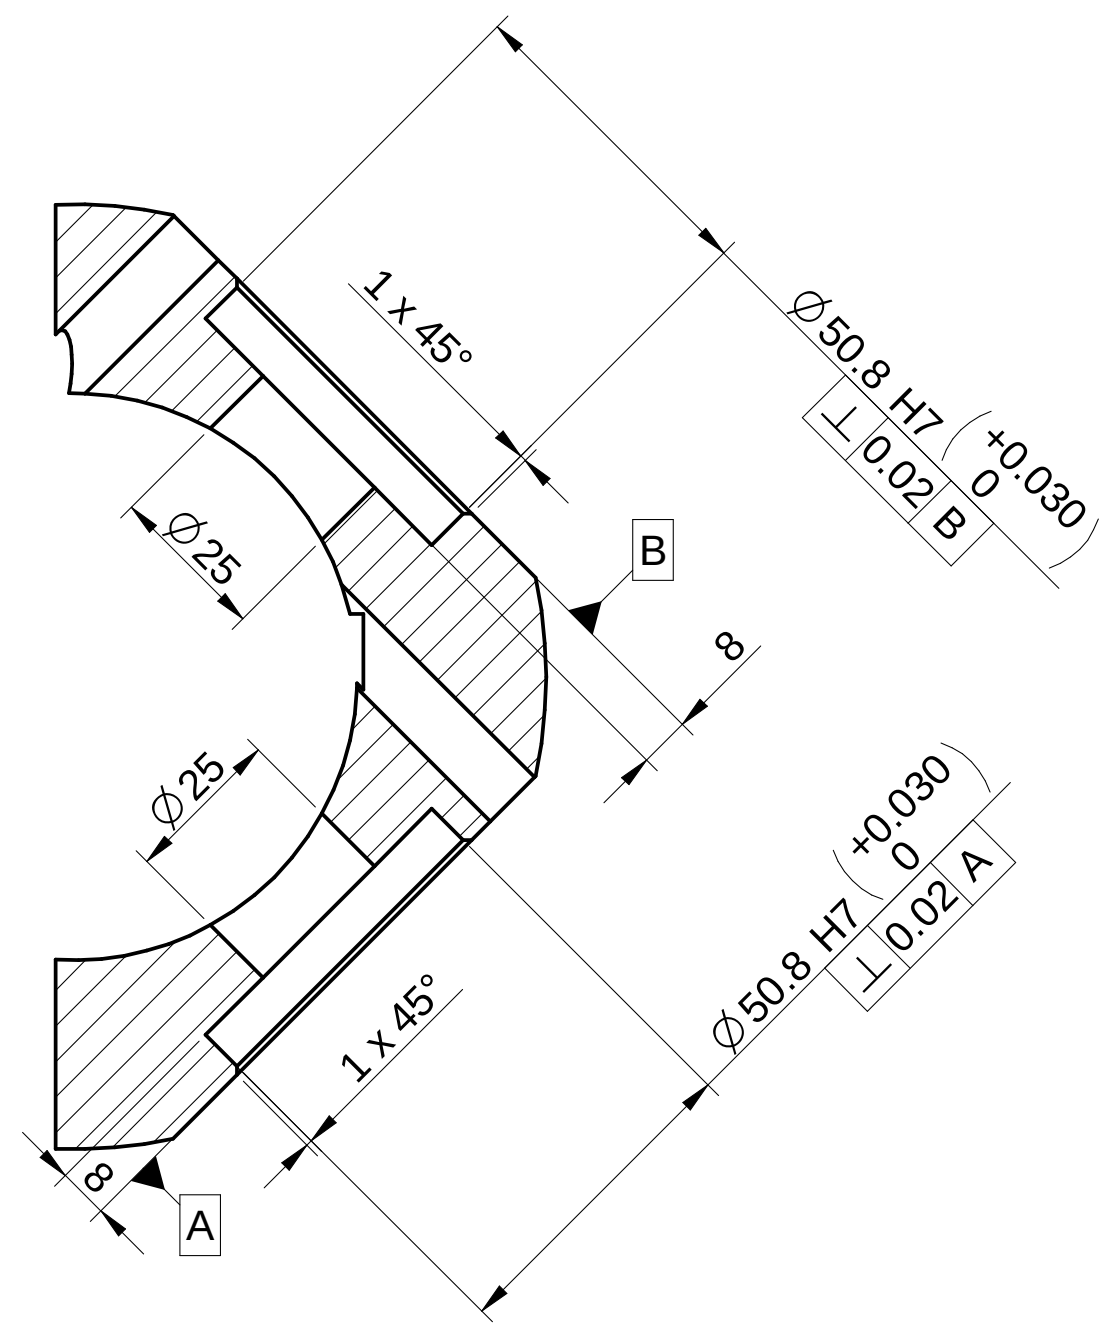

SECTION D-D
SCALE 1:2

NOTE - USE INSERT TO ALL TAPPING HOLE

NOTE - USE 3D MODEL FOR MANUFACTURING

HOLE TABLE (SECTION C-C)

Hole	X	Y	Size	REMARK
A.1	0.00	0.00		
B.1	38.21	-52.59	Ø 11.00 mm THRU'	
B.2	-38.21	-52.59	Ø 11.00 mm THRU'	
B.3	-61.82	-20.09	Ø 11.00 mm THRU'	
B.4	-61.82	20.09	Ø 11.00 mm THRU'	
B.5	-38.21	52.59	Ø 11.00 mm THRU'	
B.6	38.21	52.59	Ø 11.00 mm THRU'	
B.7	61.82	20.09	Ø 11.00 mm THRU'	
B.8	61.82	-20.09	Ø 11.00 mm THRU'	
C.1	0.00	-65.00	Ø 8.00 mm THRU'	H7 ⊥ 0.02 C
C.2	0.00	65.00	Ø 8.00 mm THRU'	H7 ⊥ 0.02 C

HOLE TABLE (VIEW B)

Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 25.00 mm THRU' C'BORE Ø 50.80 mm - 8.00 mm DEEP	REFER SEC D-D
B.1	30.25	17.46	M5 x 10.00 mm DEEP	
B.2	-30.25	17.46	M5 x 10.00 mm DEEP	
B.3	0.00	-34.92	M5 x 10.00 mm DEEP	
C.1	-35.49	0.62	Ø 10.00 mm THRU'	
C.2	-17.21	-31.05	Ø 10.00 mm THRU'	
D.1	-9.04	-33.73	Ø 5.00 mm x 8.00 mm DEEP	
E.1	-18.50	-125.00	M4 x 8.00 mm DEEP	
E.2	18.50	-125.00	M4 x 8.00 mm DEEP	

HOLE TABLE (VIEW A)

Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 25.00 mm THRU' C'BORE Ø 50.80 mm - 8.00 mm DEEP	REFER SEC D-D
B.1	33.73	9.04	Ø 5.00 mm x 8.00 mm DEEP	
C.1	30.25	17.46	M5 x 10.00 mm DEEP	
C.2	-30.25	17.46	M5 x 10.00 mm DEEP	
C.3	0.00	-34.92	M5 x 10.00 mm DEEP	
D.1	-35.49	0.62	Ø 10.00 mm THRU'	
D.2	-17.21	-31.05	Ø 10.00 mm THRU'	
E.1	-18.50	-120.00	M4 x 8.00 mm DEEP	
E.2	18.50	-120.00	M4 x 8.00 mm DEEP	

TOLERANCE NOTE :-
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN±0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN ±0.2.

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : MW

NOTE : (English)
# MATERIAL: AL HE30
# FINISH: SELF-ANODIZING
MACHINING: 1.6√
# WEIGHT(Kg): 4.63 kg

NOTE :-(French)
MATÉRIEL : AL HE30
# FINITION : SELF-ANODIZING
MACHINES : 1.6√
# POIDS (Kg): 4.63 kg

RESERVED SPACE FOR CONTROLLED COPY STAMP

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY

WIPRO PARI GROUP

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

DESCRIPTION
GRIPPER MOUNTING BLOCK

DRAWING TYPE
MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
395.81 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. N.A.
PART CLASS. B
HEAT TREATMENT NA

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
01081635	03006480	03002882	#	**P23Y5B073002**	**00**	1 : 5
30/04/2024	30/04/2024	30/04/2024	NET WEIGHT-Kg 4.63 kg			SHEET 1 OF 1

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED