NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

NOTE T + S :- (English)

HEAT TREATMANT PROCESS	XXXXXX
HARDNESS & DEPTH	: REF NOTE
FINISH & DEPTH	:REF NOTE
TEST COUPON SIZE	:ø8X37(20mmLENGTH-01NOS)
WELD CLASS	: B IF APPLICABLE

MATERIAL TEST CERTIFICATE REPORT REQURIED
NON DESTRUCTIVE TESTING


RAW MATERIAL ULTRASONIC TEST	HEAT TREATMENT DIE PENETRATION TEST + ULTRASONIC TEST	FINISH COMPOMENT MAGNETIC PARTICLE INSPECTION

NOTE T + S :- (French)

PROCÉDÉ H.T.	: XXXXXX
DURETÉ ET PROFONDEUR	: REF NOTE
FINITION ET PROFONDEUR	: REF NOTE
DIMENSION TEST COUPON	:ø8X37(20mmLENGTH-01NOS)
CLASSE D'USINAGE	: B IF APPLICABLE

RAPPORT DU CTM REQUIS
CONTRÔLE NON DESTRUCTIF

MATIÈRE PREMIÈRE TEST ULTRASONIQUE	TRAITEMENT DE LA CHALEUR TEST DE PÉNÉTRATION DE MATRICE + TEST ULTRASONIQUE	COMPOSANT DE FINITION INSPECTION MAGNÉTIQUE DES PARTICULES




SCALE/ÉCHELLE 2:1



SCALE/ÉCHELLE 2:1

HEAT TREATMENT NOTE :- (English)
1) TO BE CASE HARDENED UPTO 56~60 HRC.
2) CASE DEPTH 0.8~1.2mm.
3) THREADS TO BE KEEP SOFT.
4) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.(IF APPLICABLE)


NOTE POUR LE TRAITEMENT DE LA CHALEUR :-(French)
1) À ENDURCIR JUSQUÀ 56~60 HRC.
2) PROFONDEUR DU TRAITEMENT 0.8 ~ 1.2MM.
3) MAINTENIR LES FILTAGES PROPRE
4) RE-TARAUDAGE À FAIRE APRÈS TRAITEMENT DE SURFACE CHEZ LE FOURNISSEUR (S'IL Y A LIEU)

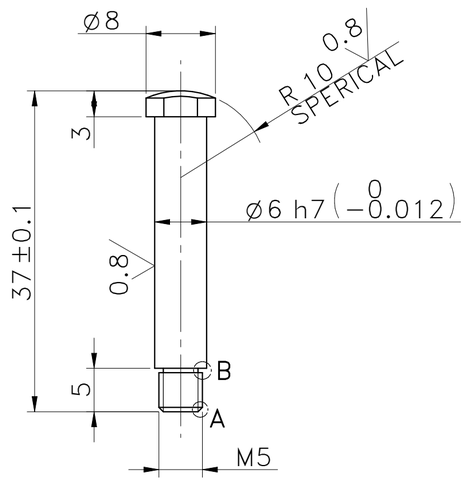


SCALE/ÉCHELLE 2:1

NOTE :-(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :-(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.



DETAIL A
SCALE/ÉCHELLE 4:1



DETAIL B
SCALE/ÉCHELLE 4:1

NOTE : (English)
MATERIAL: Steel - Alloyed:1.7147 , 20MnCr5
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2/(0.8)
WEIGHT(Kg): 0.01 kg

NOTE :-(French)
MATÉRIEL : Steel - Alloyed:1.7147 , 20MnCr5
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2/(0.8)
POIDS (Kg): 0.01 kg

RESERVED SPACE FOR CONTROLLED COPY STAMP

CONTROLLED COPY

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY
.	.	.	.
.	.	.	.

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: **SHIM BUTTING PIN 2**
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
1.22 in^2	#	#	WPES	0300	PL-02	A2

REFERENCE DWG. ---
PART CLASS. T+S
HEAT TREATMENT ---

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006751	03004785	03002882	#	P23Y5B076183	00	2 : 1
09/11/2024	09/11/2024	09/11/2024	NET WEIGHT-Kg 0.01 kg			SHEET 1 OF 1

\\srv01043\Ex_DM Uploading\2022-23\P23Y5\P23Y5B076183.dft