


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

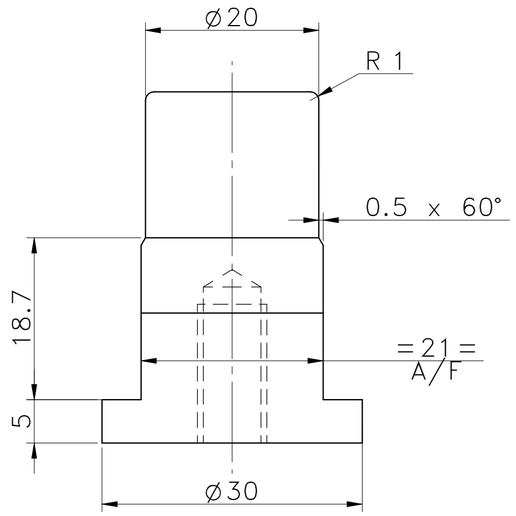


SCALE/ÉCHELLE 2:1

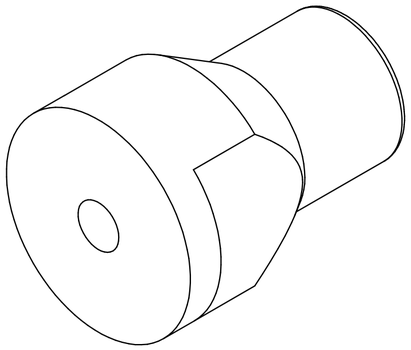

SCALE/ÉCHELLE 2:1

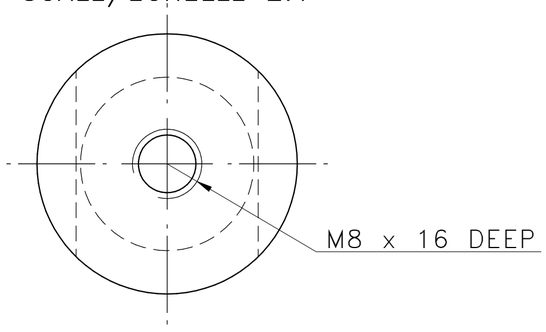

SCALE/ÉCHELLE 2:1

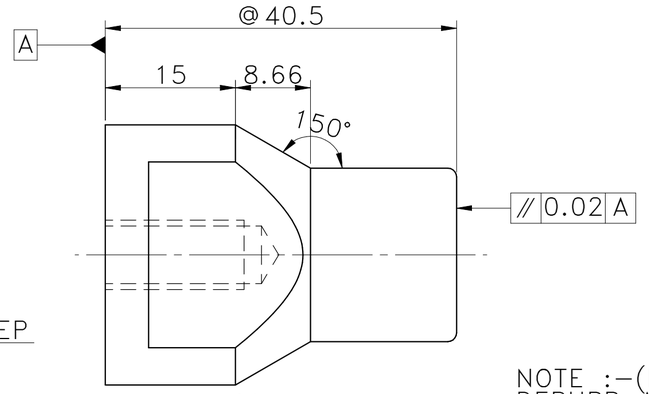

SCALE/ÉCHELLE 2:1

@± 0.02 TO BE MAINTAIN IN ALL QTY

NOTE :-(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :-(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE T + S :- (English)	MATERIAL TEST CERTIFICATE REPORT REQURIED NON DESTRUCTIVE TESTING		
HEAT TREATMANT PROCESS:REF NOTE HARDNESS & DEPTH : REF NOTE FINISH & DEPTH :REF NOTE TEST COUPON SIZE :DIA 30X40.5L(20mmLENGTH-01NOS) WELD CLASS : B IF APPLICABLE	RAW MATERIAL ULTRASONIC TEST	HEAT TREATMENT DIE PENETRATION TEST + ULTRASONIC TEST	FINISH COMPOMENT MAGNETIC PARTICLE INSPECTION

NOTE T + S :- (French)	RAPPORT DU CTM REQUIS CONTROLE NON DESTRUCTIF		
PROCÉDÉ H.T. : XXXXXX DURETÉ ET PROFONDEUR : XXXX HRc FINITION ET PROFONDEUR : XXXXXXXX DIMENSION TEST COUPON :XXXX(20mmLENGTH-01NOS) CLASSE D'USINAGE : B IF APPLICABLE	MATIÈRE PREMIÈRE TEST ULTRASONIQUE	TRAITEMENT DE LA CHALEUR TEST DE PÉNÉTRATION DE MATRICE + TEST ULTRASONIQUE	COMPOSANT DE FINITION INSPECTION MAGNÉTIQUE DES PARTICULES

HEAT TREATMENT :-(English)
1) TO BE HARDENED UPTO 32-35 HRC.
2) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.(IF APPLICABLE)

TRAITEMENT DE CHALEUR :- (French)
1) A RENFORCER JUSQUÀ 32-35 HRC.
2) RE-TARAUDAGE A FAIRE APRÈS TRAITEMENT DE SURFACE CHEZ LE FOURNISSEUR (S'IL Y A LIEU)

NOTE : (English)
MATERIAL: EN24
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2
WEIGHT(Kg): 0.14 kg

NOTE :-(French)
MATÉRIEL : EN24
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2
POIDS (Kg): 0.14 kg

RESERVED SPACE FOR ...

CONTROLLED COPY

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : M.W.

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY
.	.	.	.
.	.	.	.

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: **REST PIN**

DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
7.23 in^2	#	#	WPES	0300	PL-02	A2

REFERENCE DWG. N.A. | PART CLASS. T+S | HEAT TREATMENT | REF NOTE

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006810	03005766	03002882	#	P23Y5B091034	00	2 : 1
11/05/2024	11/05/2024	11/05/2024	NET WEIGHT-Kg 0.14 kg			SHEET 1 OF 1

\\srv01102\ExDM Uploading\2022-23\P23Y5\P23Y5B091034.dft