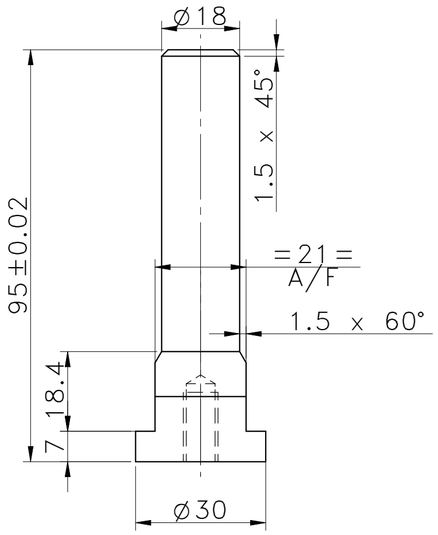
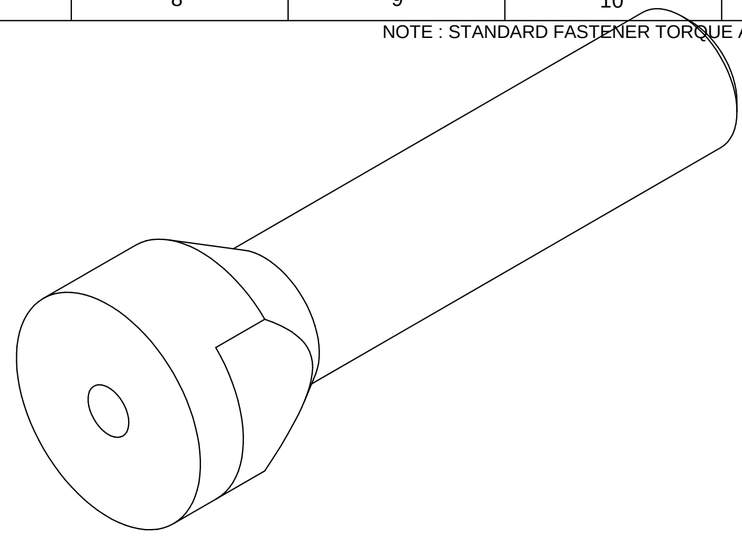
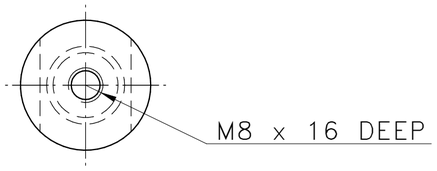
NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00



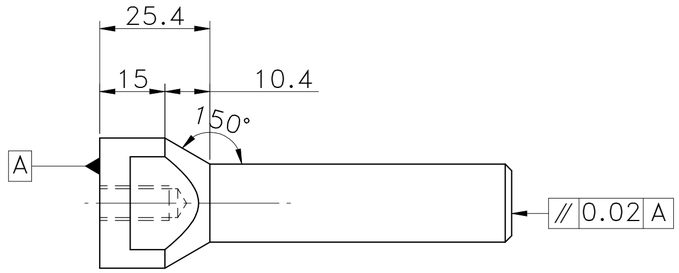

SCALE/ÉCHELLE 1:1



SCALE/ÉCHELLE 2:1




SCALE/ÉCHELLE 1:1




SCALE/ÉCHELLE 1:1

NOTE :-(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :-(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE T + S :- (English)

| | |
|---|---|
| HEAT TREATMANT PROCESS | REF NOTE |
| HARDNESS & DEPTH | : REF NOTE |
| FINISH & DEPTH | :REF NOTE |
| TEST COUPON SIZE | :DIA 30X40.5L(20mmLENGTH-01NOS) |
| WELD CLASS | : B IF APPLICABLE |

MATERIAL TEST CERTIFICATE REPORT REQURIED
NON DESTRUCTIVE TESTING

| RAW MATERIAL ULTRASONIC TEST | HEAT TREATMENT DIE PENETRATION TEST + ULTRASONIC TEST | FINISH COMPOMENT MAGNETIC PARTICLE INSPECTION |
|---|---|---|

NOTE T + S :- (French)

| | |
|---|---|
| PROCÉDÉ H.T. | : XXXXXX |
| DURETÉ ET PROFONDEUR | : XXXX HRc |
| FINITION ET PROFONDEUR | : XXXXXXXX |
| DIMENSION TEST COUPON | :XXXX(20mmLENGTH-01NOS) |
| CLASSE D'USINAGE | : B IF APPLICABLE |

RAPPORT DU CTM REQUIS
CONTRÔLE NON DESTRUCTIF

| MATIÈRE PREMIÈRE TEST ULTRASONIQUE | TRAITEMENT DE LA CHALEUR TEST DE PÉNÉTRATION DE MATRICE + TEST ULTRASONIQUE | COMPOSANT DE FINITION INSPECTION MAGNÉTIQUE DES PARTICULES |
|---|---|---|

HEAT TREATMENT :-(English)
1) TO BE HARDENED UPTO 32-35 HRC.
2) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.( IF APPLICABLE )

TRAITEMENT DE CHALEUR :- (French)
1) À RENFORCER JUSQUÀ 32-35 HRC.
2) RE-TARAUDAGE À FAIRE APRÈS TRAITEMENT DE SURFACE CHEZ LE FOURNISSEUR (S'IL Y A LIEU)

NOTE : (English)
# MATERIAL: EN24
# FINISH: I.Z.B.P. (TRIVALENT)
# MACHINING: 3.2
# WEIGHT(Kg ): 0.24 kg

NOTE :-(French)
# MATÉRIEL : EN24
# FINITION : I.Z.B.P. (TRIVALENT)
# MACHINES : 3.2
# POIDS (Kg): 0.24 kg

RESERVED SPACE FOR CONTROLLED COPY

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : W

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

| UNSP.RADII | UNSP.CHF. |
|---|---|
| 0.5 R | 0.5 X 45° |

| UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm | |
|---|---|
| UP TO 10 | ±1.5° |
| 10 UP TO 50 | ±0°50' |
| 50 UP TO 120 | ±0°25' |
| 120 UP TO 400 | ±0°15' |

| UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm | |
|---|---|
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.2 |
| 6 UP TO 30 | ±0.5 |
| 30 UP TO 120 | ±0.8 |
| 120 UP TO 315 | ±1.2 |
| 315 UP TO 1000 | ±2 |
| 1000 UP TO 2000 | ±3 |
| OVER 2000 | ±4 |

| UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm | |
|---|---|
| UP TO 10 | ±1° |
| 10 UP TO 50 | ±0°30' |
| 50 UP TO 120 | ±0°20' |
| 120 UP TO 400 | ±0°10' |

| UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm | |
|---|---|
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.1 |
| 6 UP TO 30 | ±0.2 |
| 30 UP TO 120 | ±0.3 |
| 120 UP TO 315 | ±0.5 |
| 315 UP TO 1000 | ±0.8 |
| 1000 UP TO 2000 | ±1.2 |
| OVER 2000 | ±2 |

LIMITS
Gen Tol.: IS 2102

| REVISION | DESCRIPTION | DATE | DRN.BY |
|---|---|---|---|
| . | . | . | . |
| . | . | . | . |

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: **REST PIN -2**
DRAWING TYPE: MACHINING

| SURFACE AREA | SURFACE TREATMENT | MACHINING | DESIGN UNIT | DESIGN UNIT CD. | TEAM NO. | SHEET SIZE |
|---|---|---|---|---|---|---|
| 11.76 in^2 | # | # | WPES | 0300 | PL-02 | A2 |

REFERENCE DWG. | PART CLASS. B | HEAT TREATMENT

| DRN.BY | CHKD.BY | APPD.BY | MATERIAL | DRG./PART CODE | REV. | SCALE |
|---|---|---|---|---|---|---|
| 03006810 | 03005766 | 03002882 | # | P23Y5B091036 | 00 | 1 : 1 |
| 11-05-2024 | 11-05-2024 | 11-05-2024 | NET WEIGHT-Kg 0.24 kg | | | SHEET 1 OF 1 |

\\srv01102\Ex\DM Uploading\2022-23\P23Y5\P23Y5B091036.dft