


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

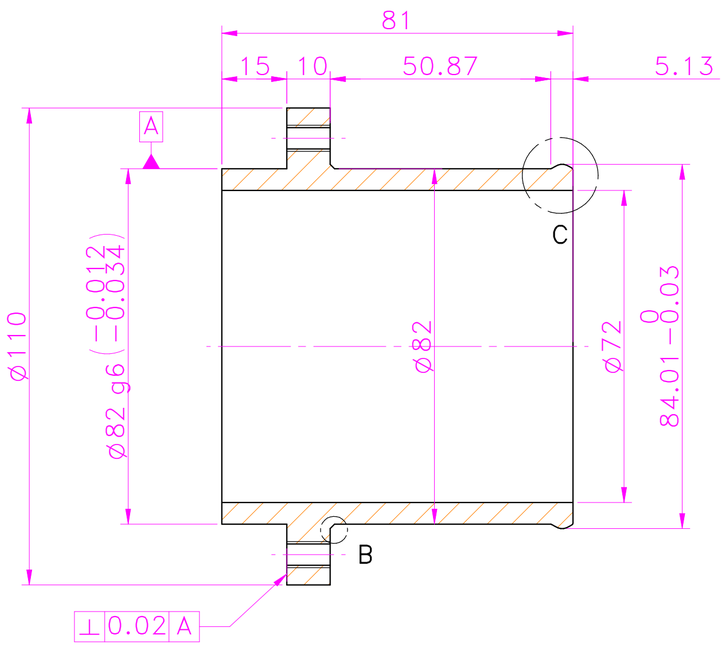

SECTION A–A
SCALE/ÉCHELLE 1:1

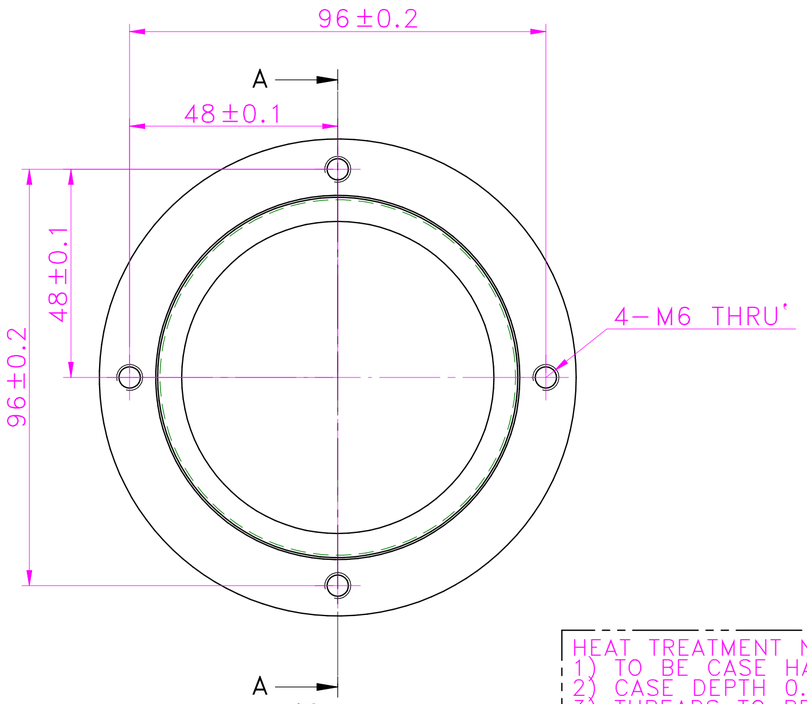

SCALE/ÉCHELLE 1:1

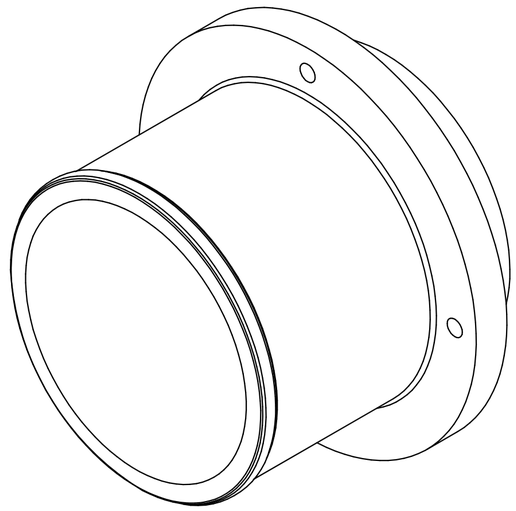


SCALE/ÉCHELLE 1:1


HEAT TREATMENT NOTE :–
1) TO BE CASE HARDENED UPTO 56~60 HRC.
2) CASE DEPTH 0.8~1.2mm.
3) THREADS TO BE KEEP SOFT.
4) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.(IF APPLICABLE)

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.



DETAIL B
SCALE/ÉCHELLE 5:1



DETAIL C
SCALE/ÉCHELLE 2:1

NOTE T + S :– (English)

HEAT TREATMANT PROCESS:REF NOTE HARDNESS & DEPTH :REF NOTE FINISH & DEPTH :REF NOTE TEST COUPON SIZE :DIA 110 X 75L(20mmLENGTH–01NOS) WELD CLASS : B IF APPLICABLE	MATERIAL TEST CERTIFICATE REPORT REQURIED NON DESTRUCTIVE TESTING RAW MATERIAL ULTRASONIC TEST	HEAT TREATMENT DIE PENETRATION TEST + ULTRASONIC TEST FINISH COMPOMENT MAGNETIC PARTICLE INSPECTION

NOTE T + S :– (French)

PROCÉDÉ H.T. :REF NOTE DURETÉ ET PROFONDEUR :REF NOTE FINITION ET PROFONDEUR :REF NOTE DIMENSION TEST COUPON :DIA 110(20mmLENGTH–01NOS) CLASSE D'USINAGE : B IF APPLICABLE	RAPPORT DU CTM REQUIS CONTRÔLE NON DESTRUCTIF MATIÈRE PREMIÈRE :TEST ULTRASONIQUE	TRAITEMENT DE LA CHALEUR :TEST DE PÉNÉTRATION DE MATRICE + TEST ULTRASONIQUE COMPOSANT DE FINITION INSPECTION MAGNÉTIQUE DES PARTICULES

NOTE : (English)
MATERIAL: 20MnCr5
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2
WEIGHT(Kg): 1.10 kg

NOTE :–(French)
MATÉRIEL : 20MnCr5
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2
POIDS (Kg): 1.10 kg

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

RESERVED SPACE FOR COMPANY STAMP

CONTROLLED COPY

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: CENTER LOCATOR
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
79.63 in^2	#	#	WPES	0300	PL-02	A2

REFERENCE DWG. N.A. | PART CLASS. T+S | HEAT TREATMENT N.A.

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006810	03004785	03002882	#	P23Y5B091052	00	1 : 2
15/05/2025	15/05/2025	15/05/2025	NET WEIGHT-Kg 1.10 kg			SHEET 1 OF 1

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : M.W.

\\sr\01043\ExDM Uploading\2022-23\P23Y5\P23Y5B091052.dft