

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

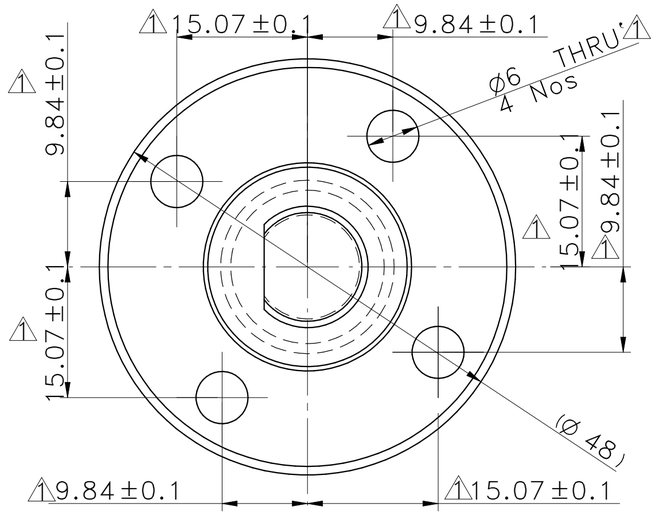

SCALE/ÉCHELLE 2:1

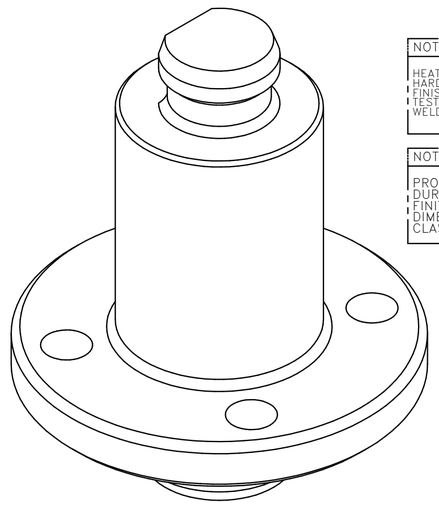

SCALE/ÉCHELLE 2:1

NOTE T + S :- (English)

HEAT TREATMANT PROCESS	:REF NOTE
HARDNESS & DEPTH	: REF NOTE
FINISH & DEPTH	:REF NOTE
TEST COUPON SIZE	:DIA 48 X 75L(20mmLENGTH-01NOS)
WELD CLASS	: B IF APPLICABLE

MATERIAL TEST CERTIFICATE REPORT REQURIED
NON DESTRUCTIVE TESTING

RAW MATERIAL ULTRASONIC TEST	HEAT TREATMENT DIE PENETRATION TEST + ULTRASONIC TEST	FINISH COMPOMENT MAGNETIC PARTICLE INSPECTION

NOTE T + S :- (French)

PROCÉDÉ H.T.	: REF NOTE
DURETÉ ET PROFONDEUR	: REF NOTE
FINITION ET PROFONDEUR	: REF NOTE
DIMENSION TEST COUPON	:DIA 48(20mmLENGTH-01NOS)
CLASSE D'USINAGE	: B IF APPLICABLE


RAPPORT DU CTM REQUIS
CONTRÔLE NON DESTRUCTIF

MATIÈRE PREMIÈRE TEST ULTRASONIQUE	TRAITEMENT DE LA CHALEUR TEST DE PÉNÉTRATION DE MATRICE + TEST ULTRASONIQUE	COMPOSANT DE FINITION INSPECTION MAGNÉTIQUE DES PARTICULES


NOTE :-(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :-(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.


HEAT TREATMENT :-
1) TO BE HARDENED UPTO 32-35 HRC.
2) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.(IF APPLICABLE)

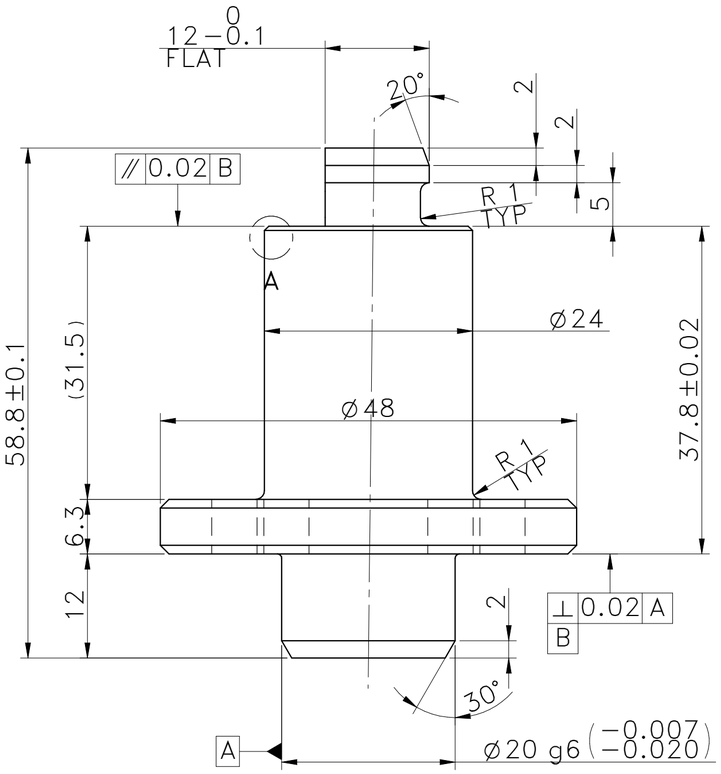

SCALE/ÉCHELLE 2:1

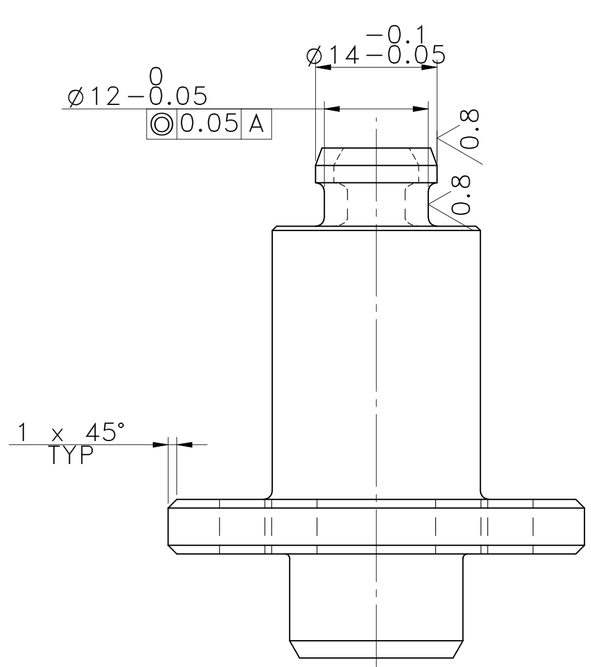

SCALE/ÉCHELLE 2:1



DETAIL A
SCALE/ÉCHELLE 4:1

NOTE : (English)
MATERIAL: EN24
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2 0.8
WEIGHT(Kg): 0.23 kg

NOTE :-(French)
MATÉRIEL : EN24
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2 0.8
POIDS (Kg): 0.23 kg

CNC MACHINING NOTE :- (English)
1) TO BE MACHINED BY 3D CAD DATA.

NOTE POUR MACHINES CNC :- (French)
1) A USINER A PARTIR DES DONNÉES CAD 3D.

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : M.W.

RESERVED SPACE FOR ... COPY

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.

UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.

0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.

UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.

0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY
1	6 MM HOLES ADDED	01/09/2025	03006330

wipro PARI
www.wipropari.com

WIPRO PARI GROUP

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

DESCRIPTION: **REST PIN**
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
12.43 in^2	#	#	WPES	0300	PL-02	A2

REFERENCE DWG. N.A. | PART CLASS. T+S | HEAT TREATMENT REF NOTE

LOCATION : PUNE

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006810	03004785	03002882	#	P23Y5B091057	01	1 : 2
01/09/2025	01/09/2025	01/09/2025	NET WEIGHT-Kg 0.23 kg			SHEET 1 OF 1

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

\\srv01043\ExDM Uploading\2022-23\P23Y5\P23Y5B091057.dft