NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

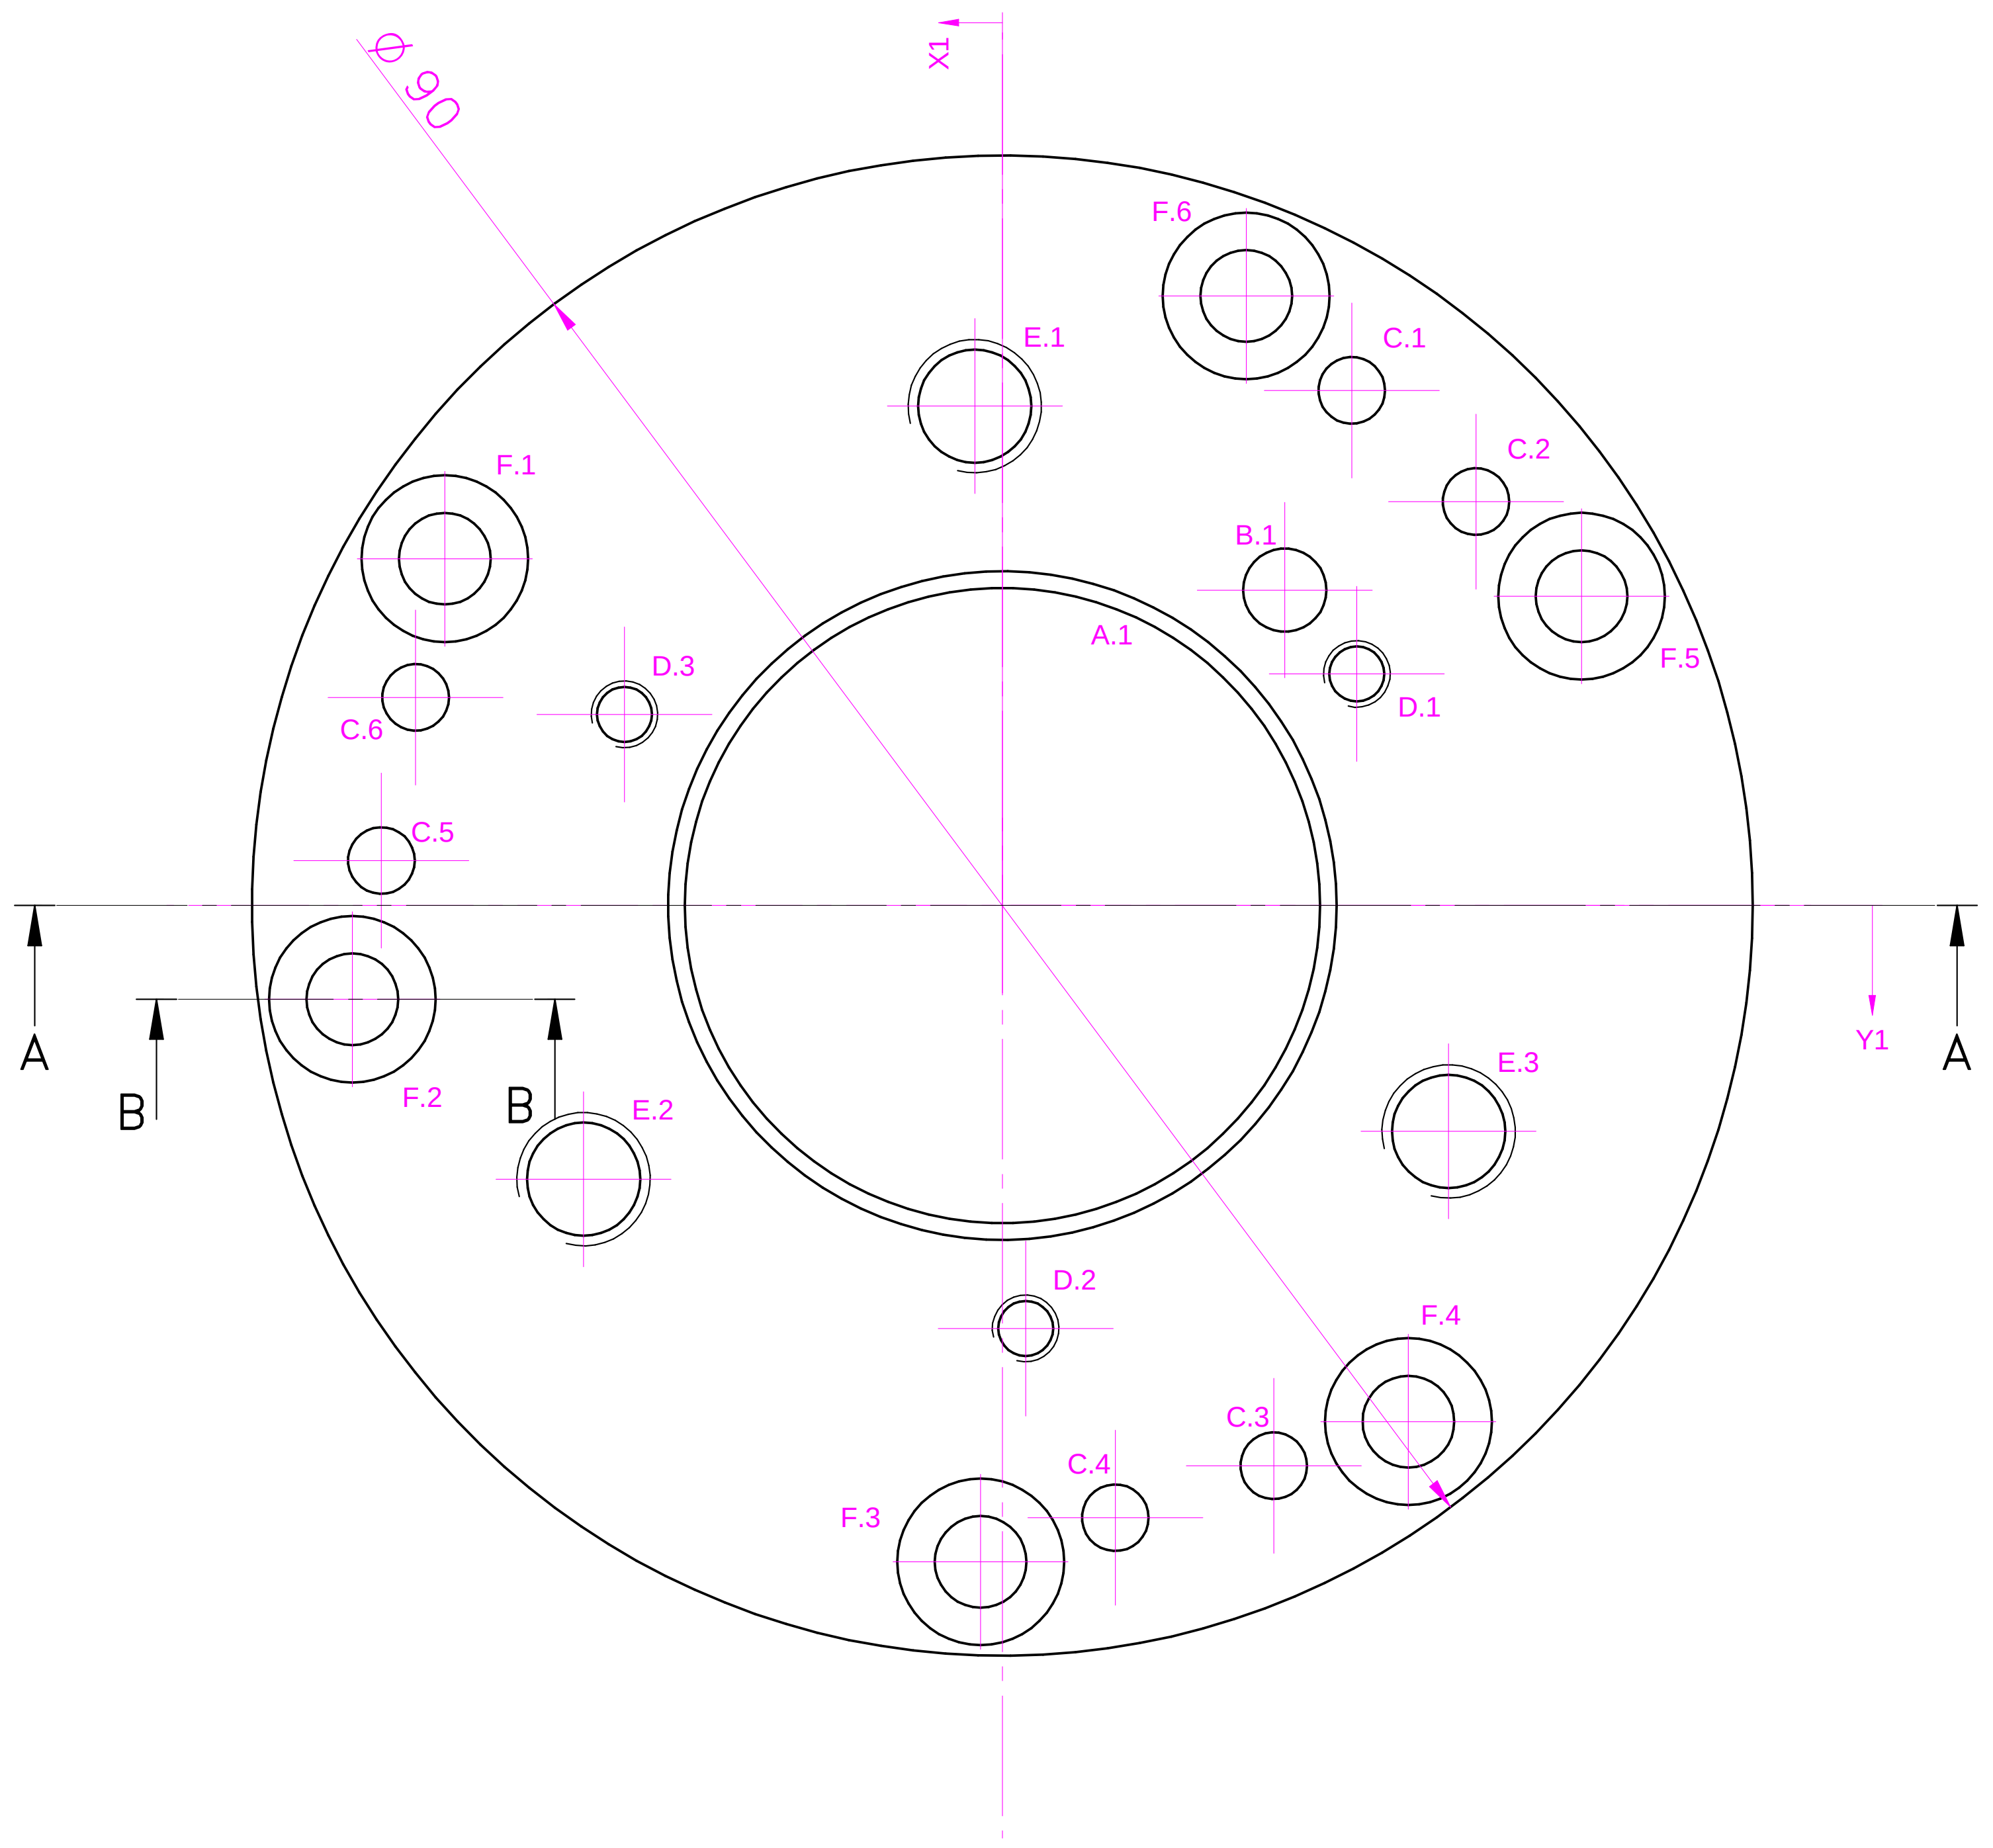

SCALE/ÉCHELLE 2:1

HOLE TABLE

Hole	X	Y	Size	REMARK
A.1	0.00	0.00		H7,REF SEC A–A
B.1	16.94	18.92	O 5.00 mm THRU'	H7
C.1	20.96	30.90	O 4.00 mm THRU'	H7
C.2	28.41	24.23	O 4.00 mm THRU'	H7
C.3	16.28	−33.60	O 4.00 mm THRU'	H7
C.4	6.78	−36.72	O 4.00 mm THRU'	H7
C.5	−37.24	2.70	O 4.00 mm THRU'	H7
C.6	−35.19	12.49	O 4.00 mm THRU'	H7
D.1	21.26	13.89	M4 THRU'	
D.2	1.40	−25.36	M4 THRU'	
D.3	−22.66	11.47	M4 THRU'	
E.1	−1.65	29.95	M8 THRU'	
E.2	−25.12	−16.41	M8 THRU'	
E.3	26.77	−13.55	M8 THRU'	
F.1	−33.44	20.81	O 5.50 mm THRU' C'BORE O 10.00 mm – 5.80 mm DEEP	REF SEC B–B
F.2	−38.98	−5.62	O 5.50 mm THRU' C'BORE O 10.00 mm – 5.80 mm DEEP	REF SEC B–B
F.3	−1.30	−39.36	O 5.50 mm THRU' C'BORE O 10.00 mm – 5.80 mm DEEP	REF SEC B–B
F.4	24.36	−30.95	O 5.50 mm THRU' C'BORE O 10.00 mm – 5.80 mm DEEP	REF SEC B–B
F.5	34.74	18.56	O 5.50 mm THRU' C'BORE O 10.00 mm – 5.80 mm DEEP	REF SEC B–B
F.6	14.62	36.57	O 5.50 mm THRU' C'BORE O 10.00 mm – 5.80 mm DEEP	REF SEC B–B

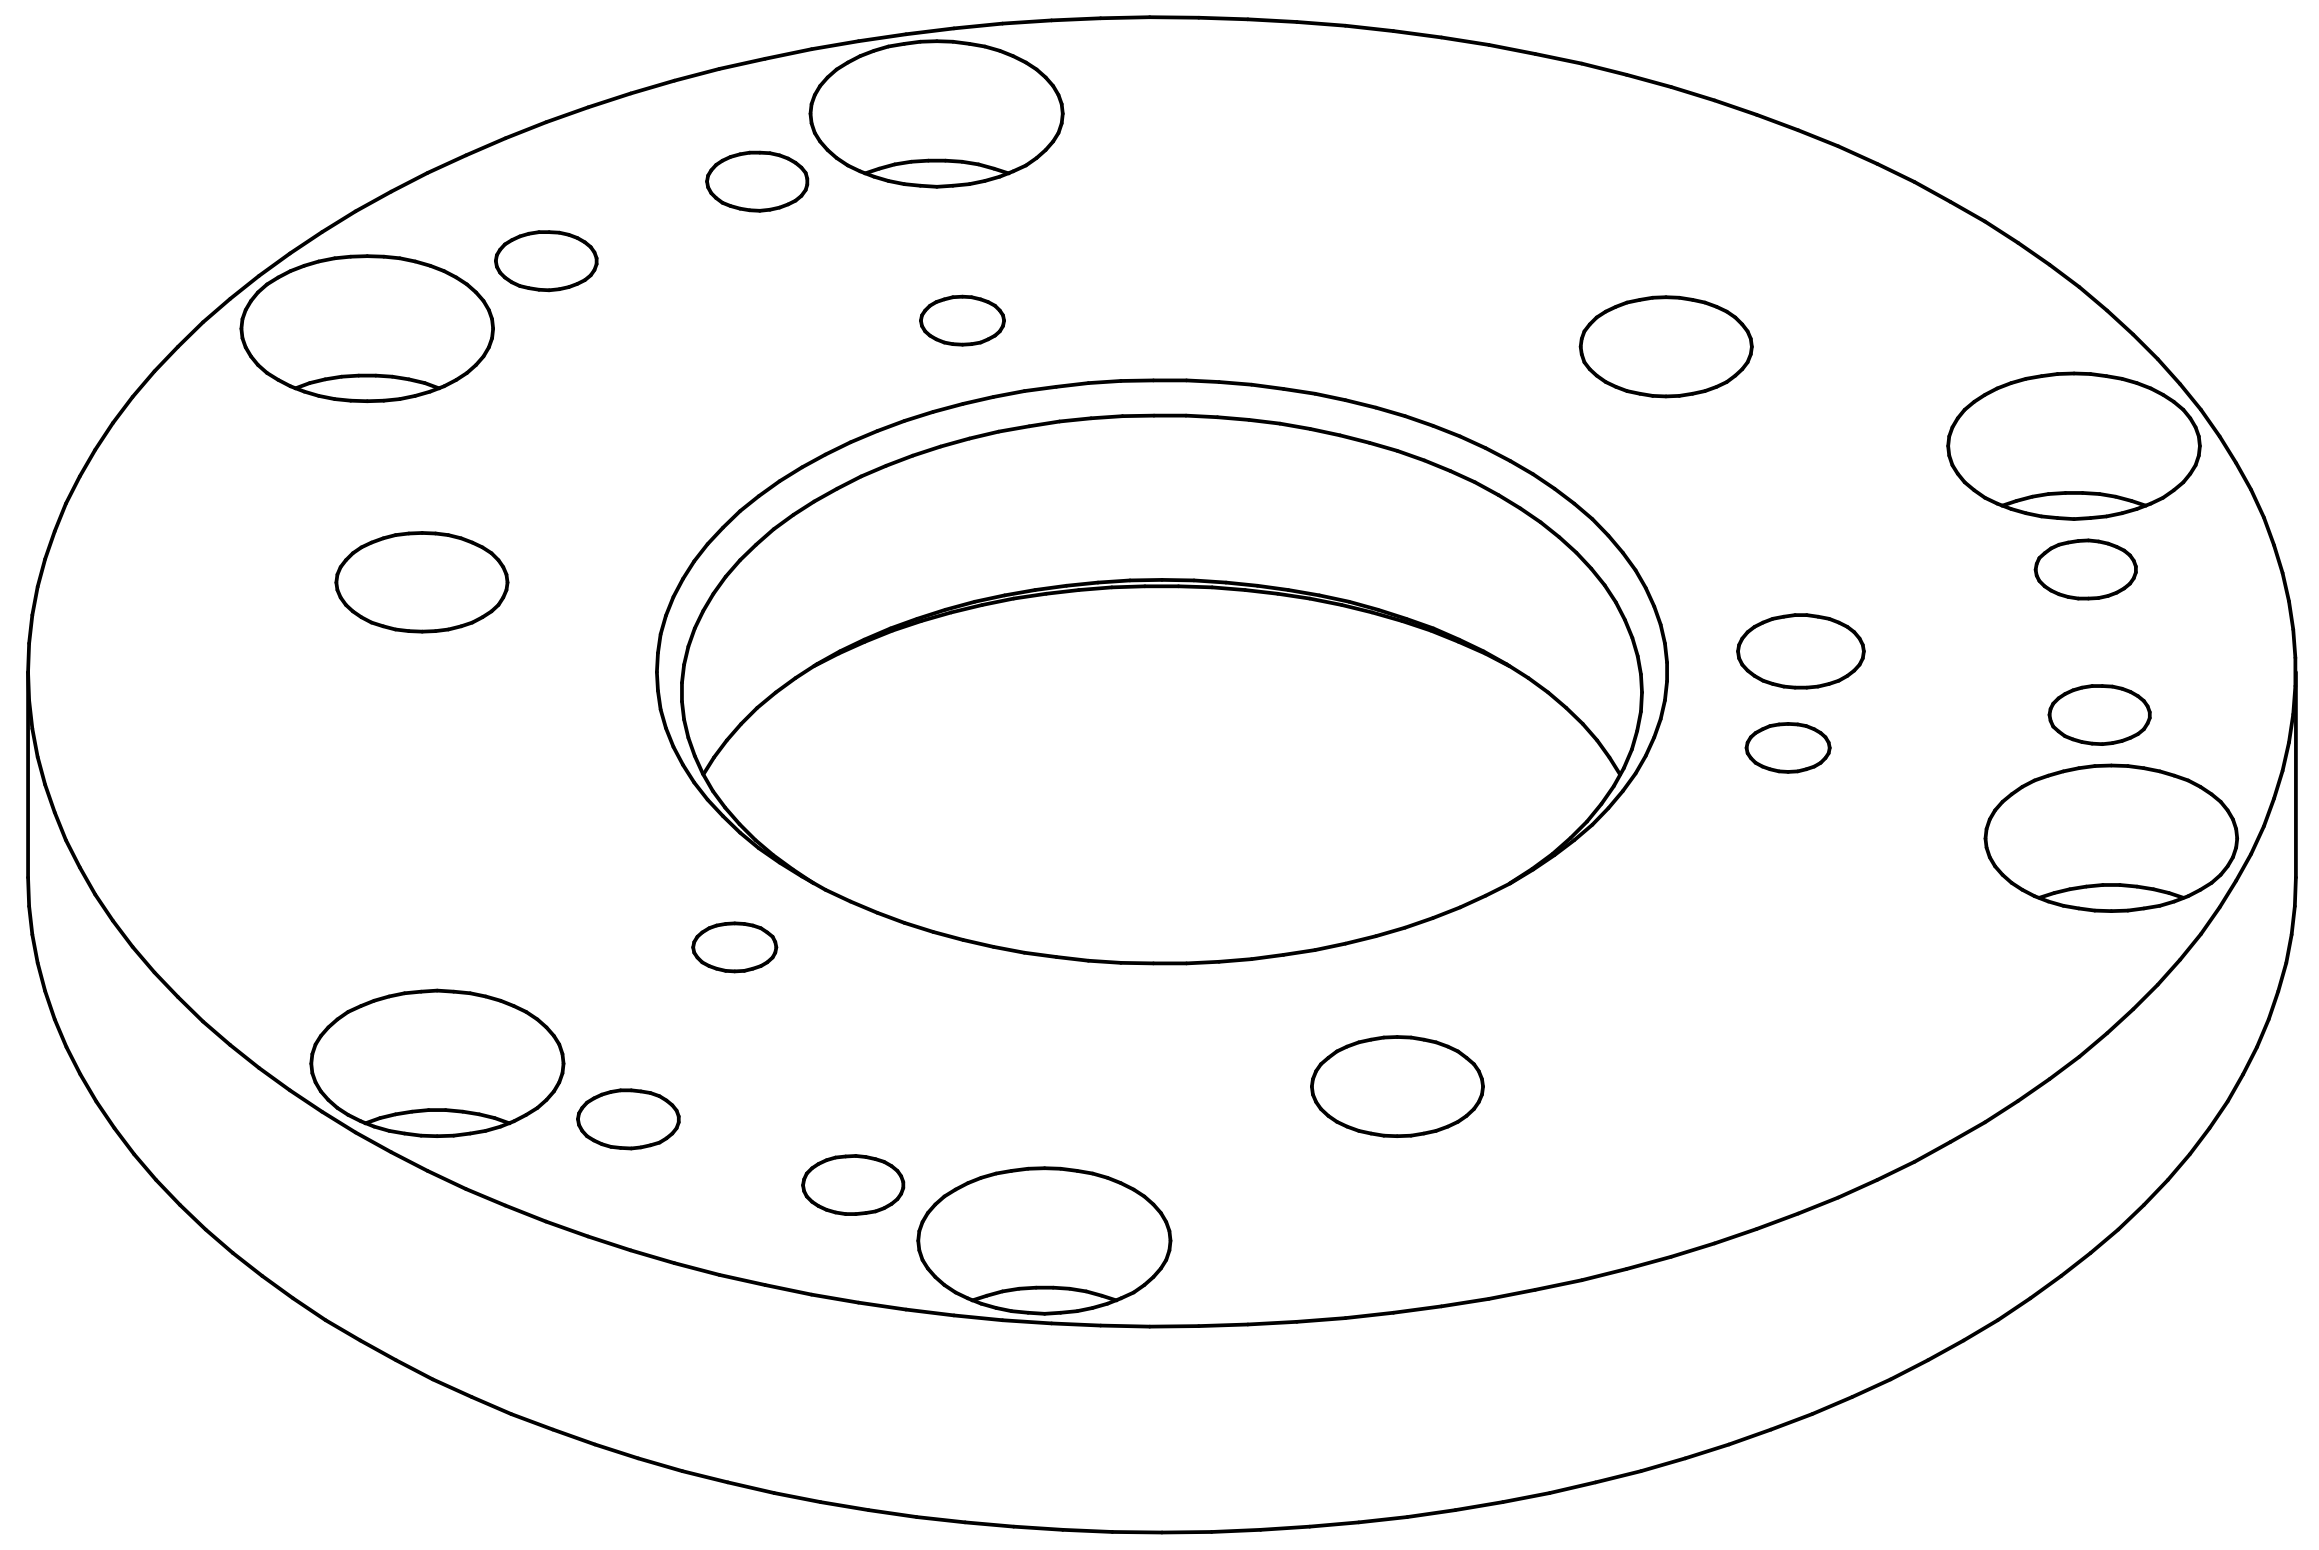

SCALE/ÉCHELLE 2:1

TOLERANCE NOTE :– (English)
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN +/– 0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D.
SHOULD BE CONTROLLED WITHIN +/– 0.1

NOTE DE TOLERANCE :– (French)
1) TOUT TROU H7 C.D DOIT ÊTRE CONTRÔLE SOUS +/– 0.02 / IT7
2) TOUT TROU ET CONTRE–ALÉSAGE C.D.
DOIT ÊTRE CONTROLE SOUS +/– 0.1

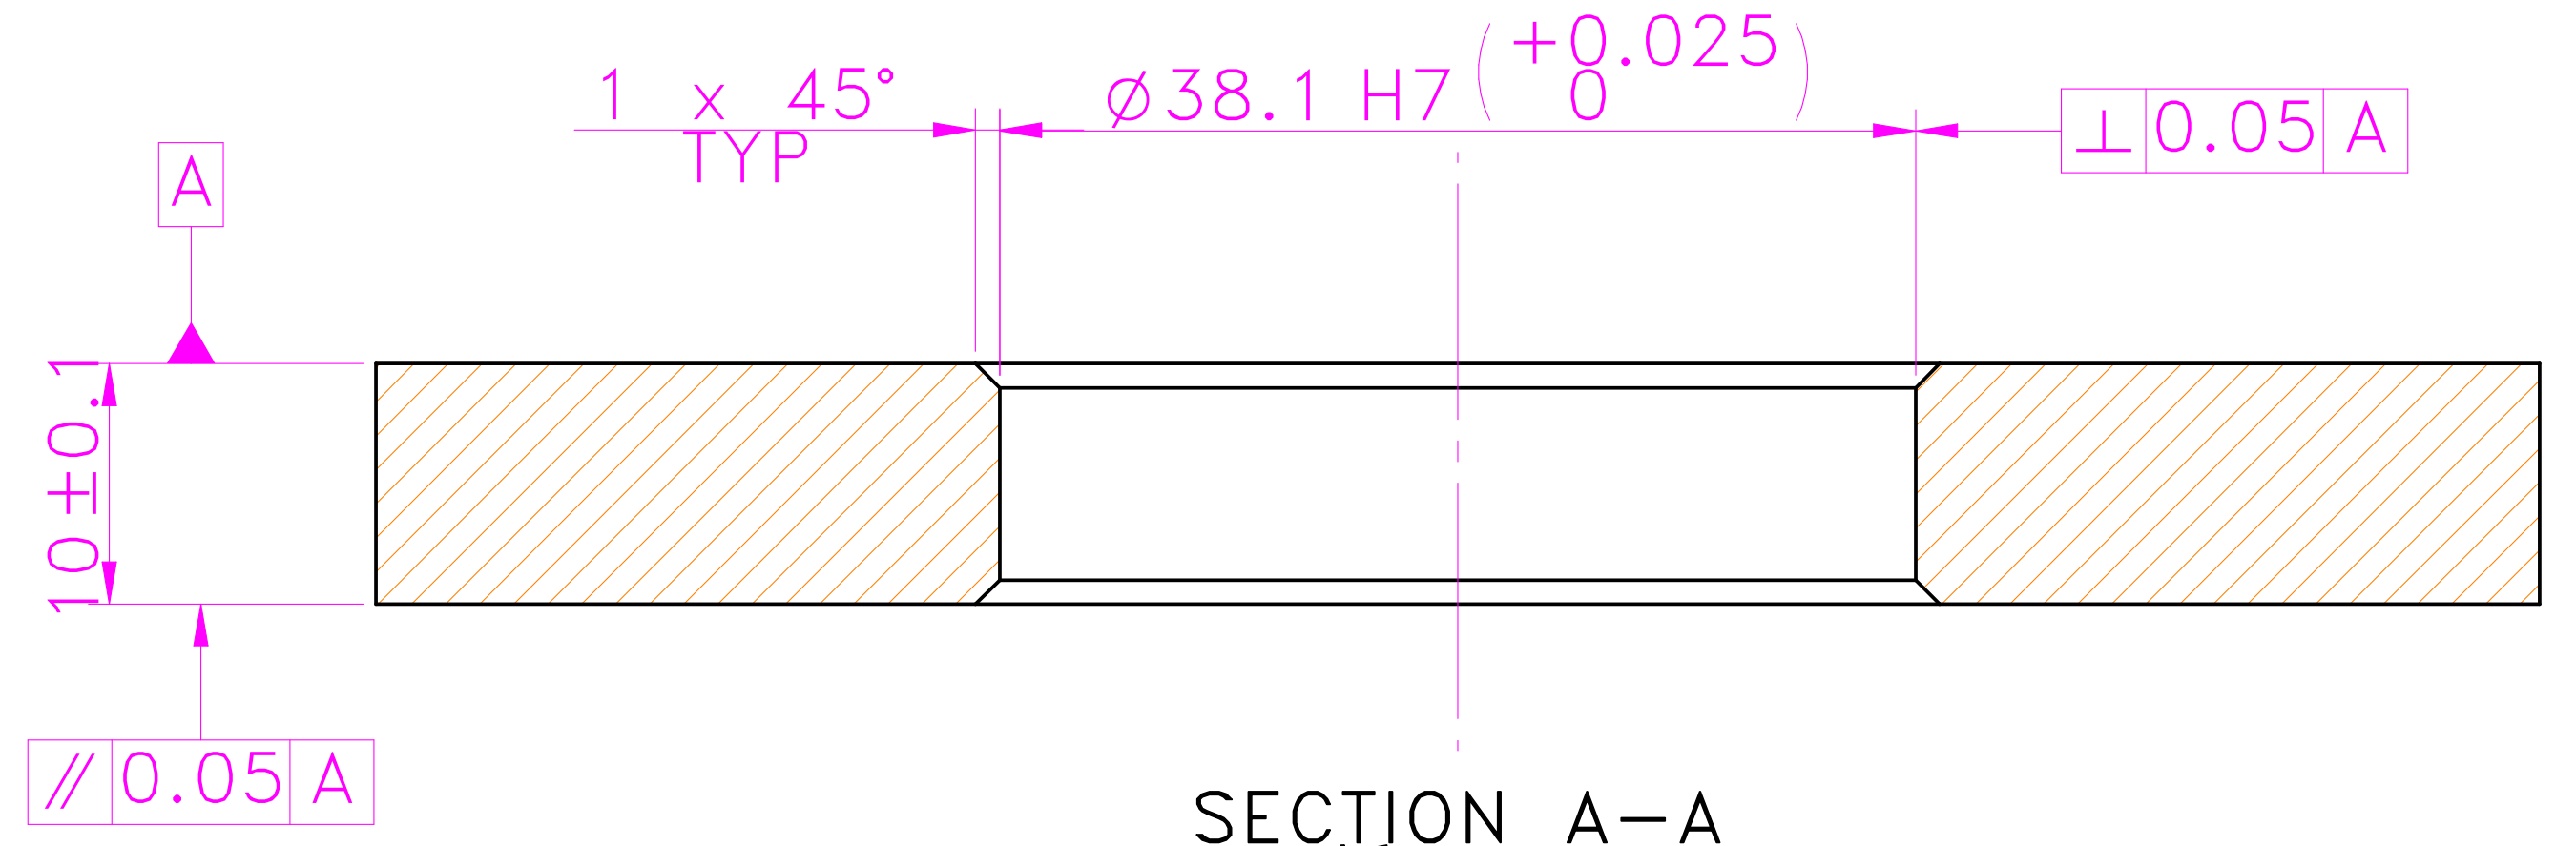

SECTION A–A
SCALE/ÉCHELLE 2:1

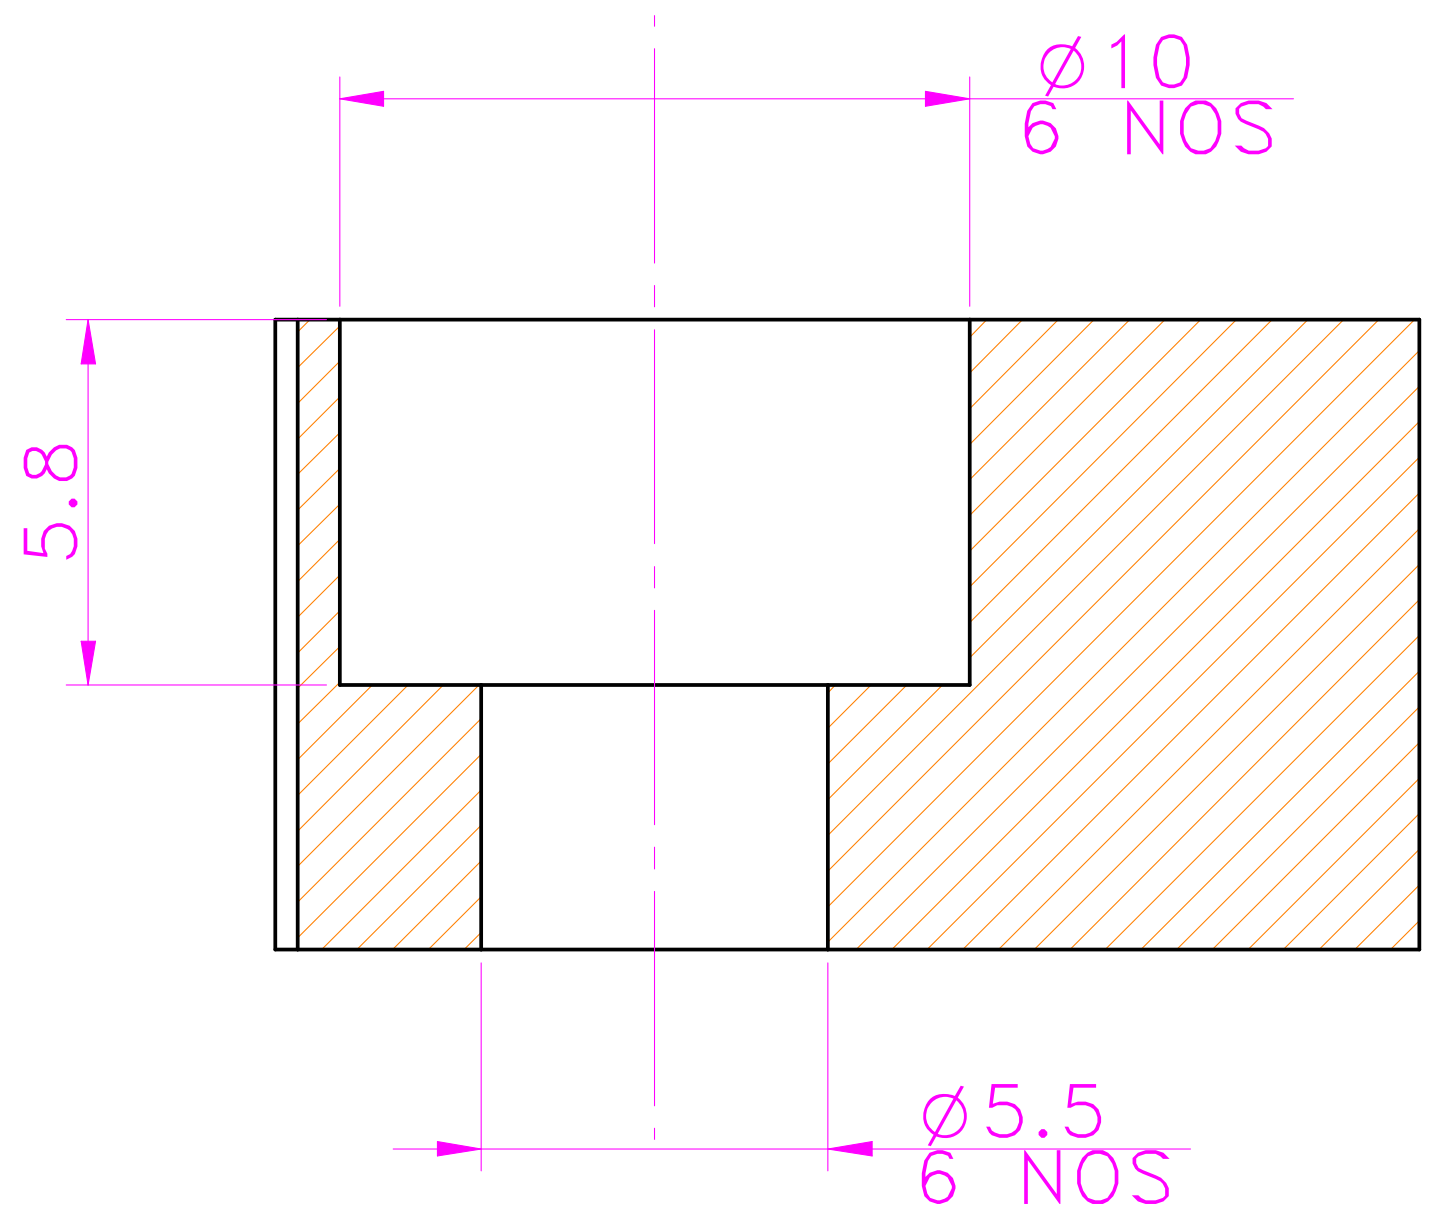

SECTION B–B
SCALE/ÉCHELLE 5:1

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE : (English)
MATERIAL: Aluminum, 7075–T6
FINISH: SELF–ANODIZING
MACHINING: $\sqrt{3.2}$
WEIGHT(Kg): 0.13 kg

NOTE :–(French)
MATÉRIEL : Aluminum, 7075–T6
FINITION : SELF–ANODIZING
MACHINES : $\sqrt{3.2}$
POIDS (Kg): 0.13 kg

RESERVED SPACE
FOR

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY
	.	.	.
	.	.	.

WIPRO PARI GROUP
www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

DESCRIPTION: GRIPPER MTG FLANGE
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
26.31 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG. P2011-0150-02-072
PART CLASS. B
HEAT TREATMENT NA

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
02006920	03004785	03002882	#	P23Y5B093021	00	2 : 1
08/05/2024	08/05/2024	08/05/2024	NET WEIGHT-Kg 0.13 kg			SHEET 1 OF 1

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA