


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

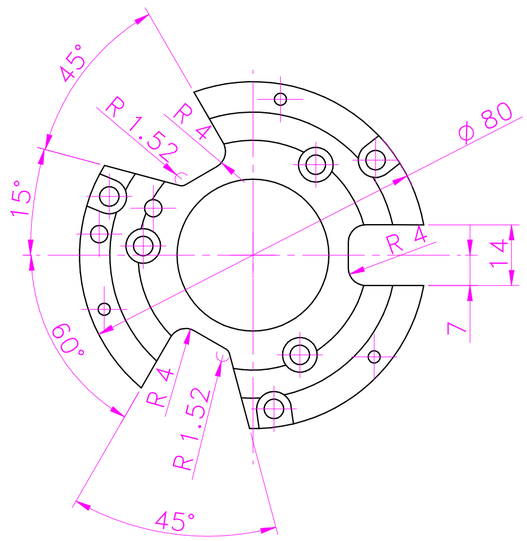


SCALE/ÉCHELLE 1:1




SCALE/ÉCHELLE 1:1

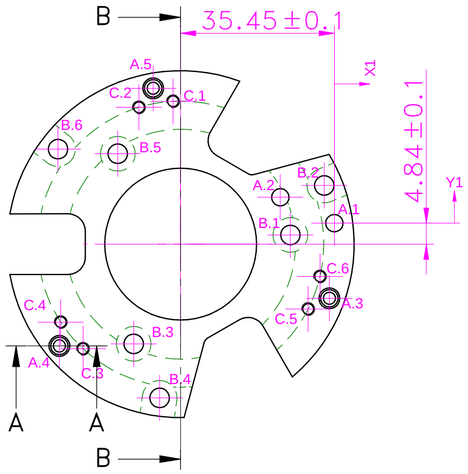


SCALE/ÉCHELLE 1:1

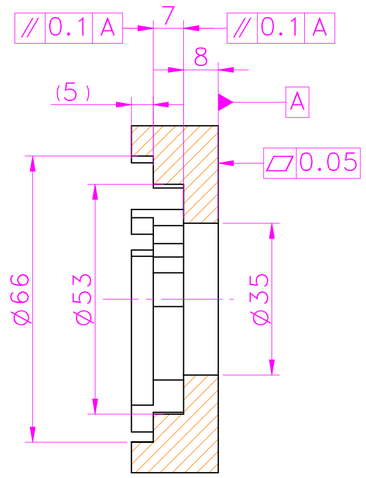

SECTION B–B
SCALE/ÉCHELLE 1:1



SECTION A–A
SCALE/ÉCHELLE 1:1

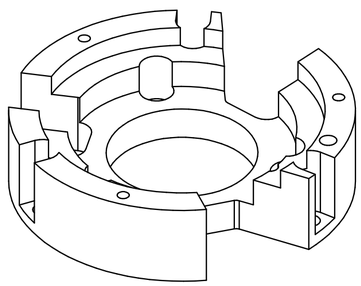

SCALE/ÉCHELLE 1:1

CNC MACHINING NOTE :– (English)
1) TO BE MACHINED BY 3D CAD DATA.

NOTE POUR MACHINES CNC :– (French)
1) A USINER A PARTIR DES DONNÉES CAD 3D.

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

HEAT TREATMENT :–(English)
1) TO BE TOUGHENED UPTO 28–32 HRC.
2) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.(IF APPLICABLE)

TRAITEMENT DE CHALEUR :–(French)
1) A RENFORCER JUSQUDA 28–32 HRC.
2) RE–TARAUDAGE A FAIRE APRÈS TRAITEMENT DE SURFACE CHEZ LE FOURNISSEUR (SOIL Y A LIEU)

NOTE : (English)
MATERIAL: C45
FINISH: IZBP 3.2
MACHINING:
WEIGHT(Kg): 0.31 kg

NOTE :–(French)
MATÉRIEL : C45
FINITION : IZBP 3.2
MACHINES :
POIDS (Kg): 0.31 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

RESERVED SPACE FOR CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: GRIPPER BLOCK
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
25.80 in^2	#	#	WPES	0300	PL-02	A2

REFERENCE DWG. P2011-0150-02-059 | PART CLASS. B | HEAT TREATMENT | REF NOTE

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
02006920	03004785	03002882	#	P23Y5B093030	00	1 : 1
10/05/2024	10/05/2024	10/05/2024	NET WEIGHT-Kg 0.31 kg			SHEET 1 OF 2

\\srv01043\ExDM Uploading\2022-23\P23Y5\P23Y5B093030.dft

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

HOLE TABLE

Hole	X	Y	Size	REMARK
A.1	0.00	0.00	Ø 4.00 mm THRU'	H7
A.2	−12.47	5.98	Ø 4.00 mm THRU'	H7
A.3	−1.15	−17.32	Ø 4.00 mm x 17.50 mm DEEP	H7 (REF SEC A−A)
A.4	−63.41	−28.31	Ø 4.00 mm x 17.50 mm DEEP	H7 (REF SEC A−A)
A.5	−41.79	31.10	Ø 4.00 mm x 17.50 mm DEEP	H7 (REF SEC A−A)
B.1	−10.14	−2.72	Ø 4.50 mm THRU' C'BORE Ø 8.00 mm − 17.00 mm DEEP	
B.2	−2.33	8.69	Ø 4.50 mm THRU' C'BORE Ø 8.00 mm − 17.00 mm DEEP	
B.3	−46.27	−27.83	Ø 4.50 mm THRU' C'BORE Ø 8.00 mm − 17.00 mm DEEP	
B.4	−40.29	−40.30	Ø 4.50 mm THRU' C'BORE Ø 8.00 mm − 17.00 mm DEEP	

HOLE TABLE

Hole	X	Y	Size	REMARK
B.5	−49.95	16.02	Ø 4.50 mm THRU' C'BORE Ø 8.00 mm − 17.00 mm DEEP	
B.6	−63.74	17.08	Ø 4.50 mm THRU' C'BORE Ø 8.00 mm − 17.00 mm DEEP	
C.1	−37.20	28.10	M3 x 8.50 mm DEEP	
C.2	−45.08	26.72	M3 x 8.50 mm DEEP	
C.3	−57.97	−28.96	M3 x 8.50 mm DEEP	
C.4	−63.11	−22.83	M3 x 8.50 mm DEEP	
C.5	−6.04	−19.80	M3 x 8.50 mm DEEP	
C.6	−3.31	−12.28	M3 x 8.50 mm DEEP	

TOLERANCE NOTE :− (English)
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN +/− 0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN +/− 0.1

NOTE DE TOLERANCE :− (French)
1) TOUT TROU H7 C.D DOIT ÊTRE CONTRÔLÉ SOUS +/− 0.02 / IT7
2) TOUT TROU ET CONTRE−ALÉSAGE C.D,
DOIT ÊTRE CONTROLÉ SOUS +/− 0.1

NOTE : (English)
MATERIAL: C45
FINISH: IZBP 3.2
MACHINING:
WEIGHT(Kg): 0.31 kg

NOTE :−(French)
MATÉRIEL : C45
FINITION : IZBP 3.2
MACHINES :
POIDS (Kg): 0.31 kg

RESERVED SPACE FOR

CONTROLLED COPY

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

WIPRO PARI GROUP

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

DESCRIPTION: GRIPPER BLOCK
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
25.80 in^2	#	#	WPES	0300	PL-02	A2

REFERENCE DWG. P2011-0150-02-059 | PART CLASS. B | HEAT TREATMENT | REF NOTE

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
02006920	03004785	03002882	#	P23Y5B093030	00	1 : 1
10/05/2024	10/05/2024	10/05/2024	NET WEIGHT-Kg 0.31 kg			SHEET 2 OF 2

\\sr-v01043\ExDM Uploading\2022-23\P23Y5\P23Y5B093030.dft