


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

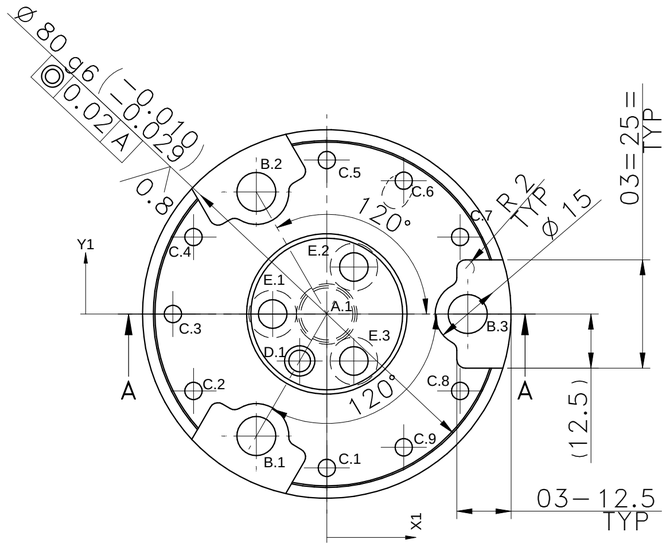


SCALE/ÉCHELLE 1:1

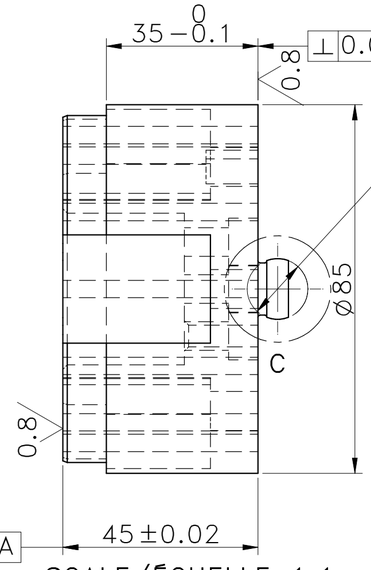


SCALE/ÉCHELLE 1:1

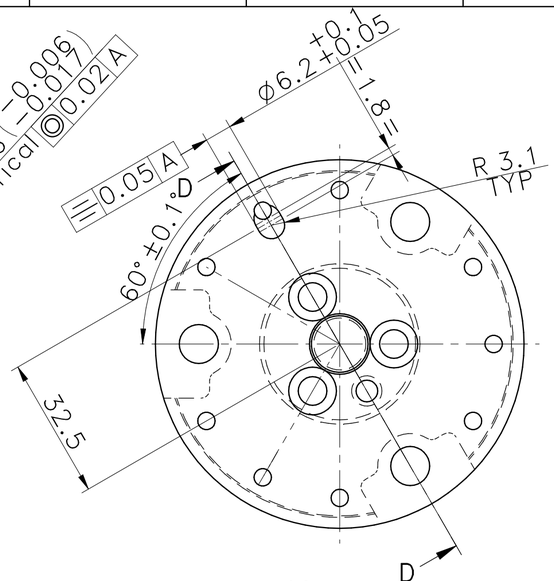


SCALE/ÉCHELLE 1:1




SCALE/ÉCHELLE 1:2




SCALE/ÉCHELLE 1:2

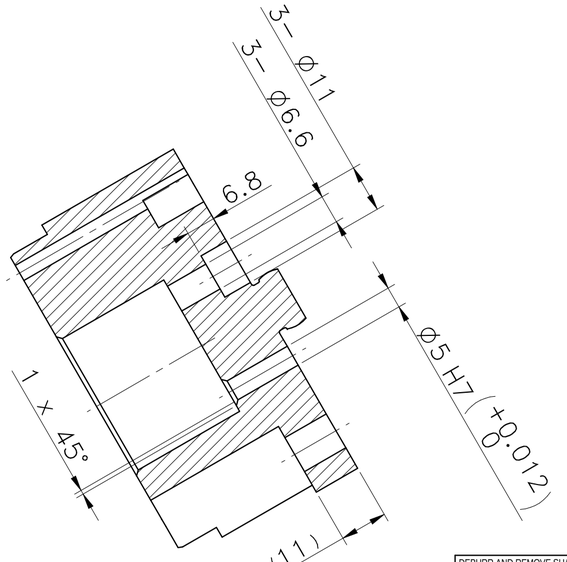


SECTION D–D
SCALE/ÉCHELLE 1:1

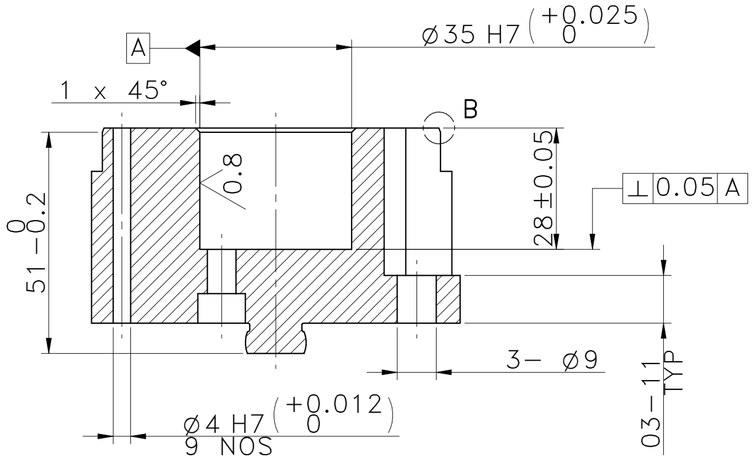

SECTION A–A
SCALE/ÉCHELLE 1:1



DETAIL C
SCALE/ÉCHELLE 2:1



DETAIL B
SCALE/ÉCHELLE 5:1

NOTE :–(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :–(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE : (English)
MATERIAL: M.S.
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2 (0.8)
WEIGHT(Kg): 1.40 kg

NOTE :–(French)
MATÉRIEL : M.S.
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2 (0.8)
POIDS (Kg): 1.40 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

RESERVED SPACE FOR
CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

wipro PARI
www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: **RESTING BLOCK**
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
55.15 in^2	#	#	WPES	0300	PL-02	A2

REFERENCE DWG. ---
PART CLASS. B
HEAT TREATMENT ----

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006330	03004785	03002882	#	P23Y5B096003	00	1 : 1
11/11/2024	11/11/2024	11/11/2024	NET WEIGHT-Kg 1.40 kg			SHEET 1 OF 2

\\srv01043\ExDM Uploading\2022-23\P23Y5\P23Y5B096003.dft

NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00		H7– REF SEC A–A
B.1	–16.25	–28.15	Ø 9.00 mm THRU'	
B.2	–16.25	28.15	Ø 9.00 mm THRU'	
B.3	32.50	0.00	Ø 9.00 mm THRU'	
C.1	0.00	–35.50	Ø 4.00 mm THRU'	H7– REF SEC A–A
C.2	–30.74	–17.75	Ø 4.00 mm THRU'	H7– REF SEC A–A
C.3	–35.50	0.00	Ø 4.00 mm THRU'	H7– REF SEC A–A
C.4	–30.74	17.75	Ø 4.00 mm THRU'	H7– REF SEC A–A
C.5	0.00	35.50	Ø 4.00 mm THRU'	H7– REF SEC A–A
C.6	17.75	30.74	Ø 4.00 mm THRU'	H7– REF SEC A–A
C.7	30.74	17.75	Ø 4.00 mm THRU'	H7– REF SEC A–A
C.8	30.74	–17.75	Ø 4.00 mm THRU'	H7– REF SEC A–A
C.9	17.75	–30.74	Ø 4.00 mm THRU'	H7– REF SEC A–A
D.1	–6.25	–10.83	Ø 5.00 mm THRU'	H7– REF SEC D–D
E.1	–12.50	0.00	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF SEC D–D
E.2	6.25	10.83	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF SEC D–D
E.3	6.25	–10.83	Ø 6.60 mm THRU' C'BORE Ø 11.00 mm – 6.80 mm DEEP	REF SEC D–D

TOLERANCE NOTE :-
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN±0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN ±0.2.

NOTE : (English)
MATERIAL: M.S.
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2 (0.8)
WEIGHT(Kg): 1.40 kg

NOTE :–(French)
MATERIEL : M.S.
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2 (0.8)
POIDS (Kg): 1.40 kg

RESERVED SPACE FOR

CONTROLLED COPY

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: **RESTING BLOCK**

DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
55.15 in^2	#	#	WPES	0300	PL-02	A2

REFERENCE DWG. --- PART CLASS. B HEAT TREATMENT ----

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03006330	03004785	03002882	#	P23Y5B096003	00	1 : 1
11/11/2024	11/11/2024	11/11/2024	NET WEIGHT-Kg 1.40 kg			SHEET 2 OF 2

\\srv01043\ExDM Uploading\2022-23\P23Y5\P23Y5B096003.dft