


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00




SCALE/ÉCHELLE 5:1



SCALE/ÉCHELLE 5:1

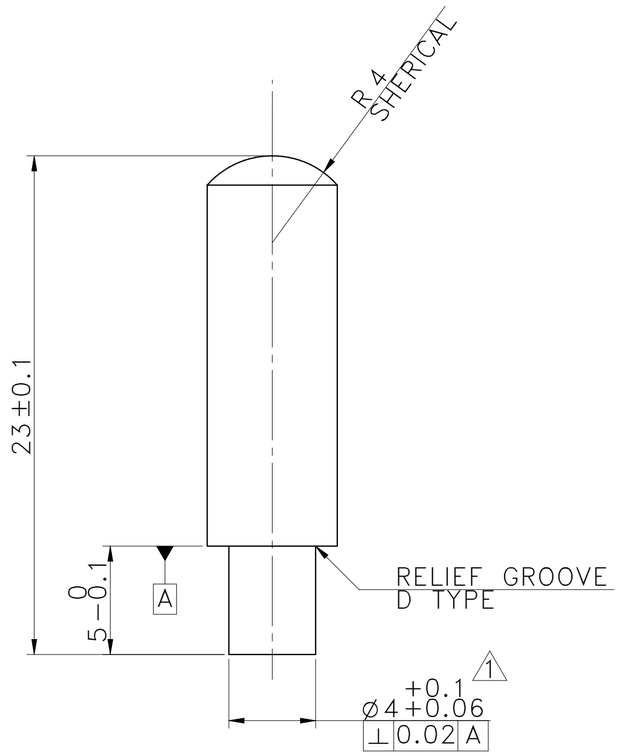


SCALE/ÉCHELLE 5:1

HEAT TREATMENT :−(English)
1) TO BE HARDENED UPTO 32−35 HRC.
2) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.( IF APPLICABLE )

TRAITEMENT DE CHALEUR :− (French)
1) A RENFORCER JUSQUÀ 32−35 HRC.
2) RE−TARAUDAGE A FAIRE APRÈS TRAITEMENT DE SURFACE CHEZ LE FOURNISSEUR (S'IL Y A LIEU)

NOTE :−(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :−(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE : (English)
# MATERIAL: EN24
# FINISH: I.Z.B.P. (TRIVALENT)
# MACHINING: 3.2
# WEIGHT(Kg ): 0.0043 kg

NOTE :−(French)
# MATÉRIEL : EN24
# FINITION : I.Z.B.P. (TRIVALENT)
# MACHINES : 3.2
# POIDS (Kg): 0.0043 kg

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

RESERVED SPACE FOR
CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

| UNSP.RADII | UNSP.CHF. |
|---|---|
| 0.5 R | 0.5 X 45° |

| UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm. | |
|---|---|
| UP TO 10 | ±1.5° |
| 10 UP TO 50 | ±0°50' |
| 50 UP TO 120 | ±0°25' |
| 120 UP TO 400 | ±0°15' |

| UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm. | |
|---|---|
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.2 |
| 6 UP TO 30 | ±0.5 |
| 30 UP TO 120 | ±0.8 |
| 120 UP TO 315 | ±1.2 |
| 315 UP TO 1000 | ±2 |
| 1000 UP TO 2000 | ±3 |
| OVER 2000 | ±4 |

| UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm. | |
|---|---|
| UP TO 10 | ±1° |
| 10 UP TO 50 | ±0°30' |
| 50 UP TO 120 | ±0°20' |
| 120 UP TO 400 | ±0°10' |

| UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm. | |
|---|---|
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.1 |
| 6 UP TO 30 | ±0.2 |
| 30 UP TO 120 | ±0.3 |
| 120 UP TO 315 | ±0.5 |
| 315 UP TO 1000 | ±0.8 |
| 1000 UP TO 2000 | ±1.2 |
| OVER 2000 | ±2 |

LIMITS
Gen Tol.: IS 2102

| REVISION | DESCRIPTION | DATE | DRN.BY |
|---|---|---|---|
| 1 | DIA 4 g6 TOLERANCE CHANGED. | 09/01/2025 | 03006751 |

wipro PARI
www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: **PIN 1**

DRAWING TYPE: MACHINING

| SURFACE AREA | SURFACE TREATMENT | MACHINING | DESIGN UNIT | DESIGN UNIT CD. | TEAM NO. | SHEET SIZE |
|---|---|---|---|---|---|---|
| 0.68 in^2 | # | # | WPES | 0300 | PL-02 | A2 |

REFERENCE DWG. ---  PART CLASS. B  HEAT TREATMENT ---

| DRN.BY | CHKD.BY | APPD.BY | MATERIAL |
|---|---|---|---|
| 03006330 | 03004785 | 03002882 | # |
| 09/01/2025 | 09/01/2025 | 09/01/2025 | NET WEIGHT-Kg 0.0043 kg |

DRG./PART CODE: **P23Y5B096041**

REV.: **01**

SCALE: 1 :

SHEET: 1 OF 1

\\srv01043\ExDM Uploading\2022-23\P23Y5\P23Y5B096041.dft