


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

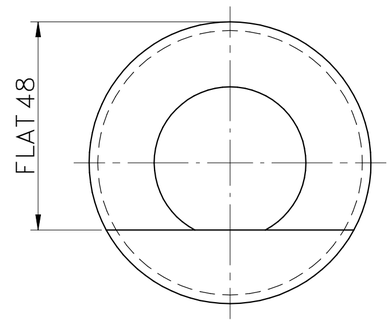


SCALE/ÉCHELLE 1:1

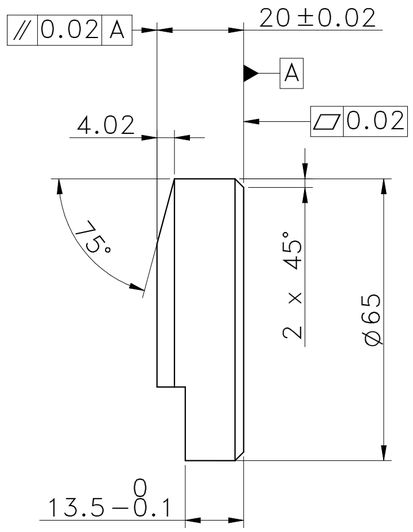


SCALE/ÉCHELLE 1:1



SCALE/ÉCHELLE 1:1

HEAT TREATMENT :−(English)
1) TO BE HARDENED UPTO 32−35 HRC.
2) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.( IF APPLICABLE )

TRAITEMENT DE CHALEUR :− (French)
1) A RENFORCER JUSQUÀ 32−35 HRC.
2) RE−TARAUDAGE À FAIRE APRÈS TRAITEMENT DE SURFACE CHEZ LE FOURNISSEUR (SIL Y A LIEU)

NOTE :−(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :−(French)
ÉBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE : (English)
# MATERIAL: EN24
# FINISH: I.Z.B.P. (TRIVALENT)
# MACHINING: 3.2/(0.8)
# WEIGHT(Kg ): 0.45 kg

NOTE :−(French)
# MATÉRIEL : EN24
# FINITION : I.Z.B.P. (TRIVALENT)
# MACHINES : 3.2/(0.8)
# POIDS (Kg): 0.45 kg

RESERVED SPACE FOR STAMP

CONTROLLED COPY

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

| DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED | |
|---|---|
| UNSP. RADII 0.5 R | UNSP.CHF. 0.5 X 45° |

| UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm. | |
|---|---|
| UP TO 10 | ±1.5° |
| 10 UP TO 50 | ±0°50' |
| 50 UP TO 120 | ±0°25' |
| 120 UP TO 400 | ±0°15' |

| UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm. | |
|---|---|
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.2 |
| 6 UP TO 30 | ±0.5 |
| 30 UP TO 120 | ±0.8 |
| 120 UP TO 315 | ±1.2 |
| 315 UP TO 1000 | ±2 |
| 1000 UP TO 2000 | ±3 |
| OVER 2000 | ±4 |

| UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm. | |
|---|---|
| UP TO 10 | ±1° |
| 10 UP TO 50 | ±0°30' |
| 50 UP TO 120 | ±0°20' |
| 120 UP TO 400 | ±0°10' |

| UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm. | |
|---|---|
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.1 |
| 6 UP TO 30 | ±0.2 |
| 30 UP TO 120 | ±0.3 |
| 120 UP TO 315 | ±0.5 |
| 315 UP TO 1000 | ±0.8 |
| 1000 UP TO 2000 | ±1.2 |
| OVER 2000 | ±2 |
| LIMITS | |
| Gen Tol.: IS 2102 | |

| REVISION | DESCRIPTION | DATE | DRN.BY |
|---|---|---|---|
| . | . | . | . |
| . | . | . | . |

wipro PARI
www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: **OP 1050- ITEM 19**
DRAWING TYPE: MACHINING

| SURFACE AREA | SURFACE TREATMENT | MACHINING | DESIGN UNIT | DESIGN UNIT CD. | TEAM NO. | SHEET SIZE |
|---|---|---|---|---|---|---|
| 15.25 in^2 | # | # | WPES | 0300 | PL-02 | A2 |

REFERENCE DWG. ---
PART CLASS. B
HEAT TREATMENT
REF NOTE

| DRN.BY | CHKD.BY | APPD.BY | MATERIAL |
|---|---|---|---|
| 03006751 | 03004785 | 03002882 | # |
| 21/06/2024 | 21/06/2024 | 21/06/2024 | NET WEIGHT-Kg 0.45 kg |

DRG./PART CODE: **P23Y5B099019**
REV.: **00**
SCALE: 1 : 1
SHEET: 1 OF 1

\\srv01043\ExDM Uploading\2022-23\P23Y5\P23Y5B099019.dft