
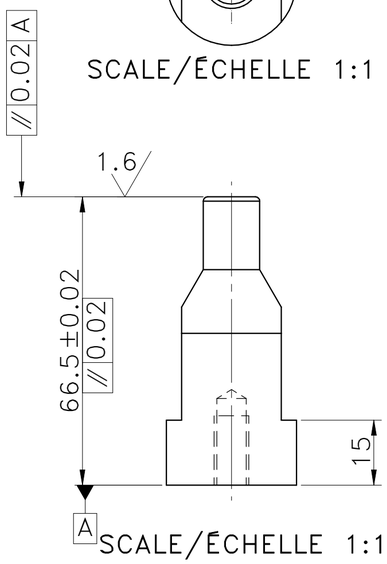
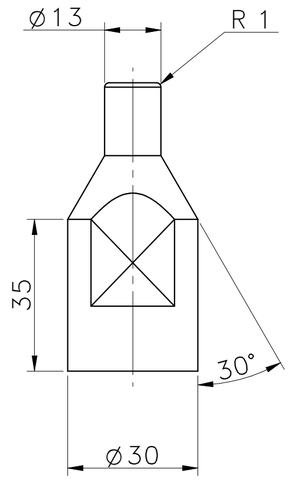
NOTE : STANDARD FASTENER TORQUE AS PER PST-DES-01 PFR-DES-07-REV-05





SCALE/ÉCHELLE 1:1



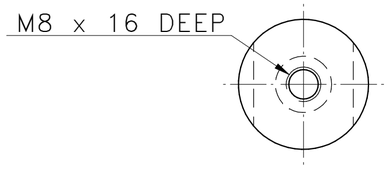

SCALE/ÉCHELLE 1:1




SCALE/ÉCHELLE 1:1



SCALE/ÉCHELLE 1:1




SCALE/ÉCHELLE 1:1

T + S NOTE :

| | |
|---|---|
| H.T.PROCESS | : REF NOTE |
| HARDNESS & DEPTH | : REF NOTE |
| FINISH & DEPTH | : REF NOTE |
| TEST COUPON SIZE | : Ø30 (20mmLENGTH - 01NOS) |
| WELD CLASS | : B IF APPLICABLE |

MTC REPORT REQUIRED
NON DESTRUCTIVE TESTING (IF APPLICABLE)

| RAW MATERIAL | HEAT TREATMENT | FINISH COMPONENT |
|---|---|---|
| UT | DP+UT | MPI |

HEAT TREATMENT NOTE :-
1) TO BE CASE HARDENED UPTO 55~60 HRC.
2) CASE DEPTH 0.8~1.2mm.
3) THREADS TO BE KEEP SOFT.
4) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.( IF APPLICABLE )

NOTE :-(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :-(French)
ÉBAVUREZ TOUS LES TROUS
NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : NA

NOTE : (English)
# MATERIAL: 20MnCr5
# FINISH: IZBP
# MACHINING: 3.2 ( 1.6 )
# WEIGHT(Kg ): 0.23 kg

NOTE :-(French)
# MATÉRIEL : 20MnCr5
# FINITION : IZBP
# MACHINES : 3.2 ( 1.6 )
# POIDS (Kg): 0.23 kg

RESERVED SPACE FOR CONTROL COPY

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

| UNSP.RADII | UNSP.CHF. |
|---|---|
| 0.5 R | 0.5 X 45° |

| UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm | |
|---|---|
| UP TO 10 | ±1.5° |
| 10 UP TO 50 | ±0°50' |
| 50 UP TO 120 | ±0°25' |
| 120 UP TO 400 | ±0°15' |

| UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm. | |
|---|---|
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.2 |
| 6 UP TO 30 | ±0.5 |
| 30 UP TO 120 | ±0.8 |
| 120 UP TO 315 | ±1.2 |
| 315 UP TO 1000 | ±2 |
| 1000 UP TO 2000 | ±3 |
| OVER 2000 | ±4 |

| UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm. | |
|---|---|
| UP TO 10 | ±1° |
| 10 UP TO 50 | ±0°30' |
| 50 UP TO 120 | ±0°20' |
| 120 UP TO 400 | ±0°10' |

| UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm. | |
|---|---|
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.1 |
| 6 UP TO 30 | ±0.2 |
| 30 UP TO 120 | ±0.3 |
| 120 UP TO 315 | ±0.5 |
| 315 UP TO 1000 | ±0.8 |
| 1000 UP TO 2000 | ±1.2 |
| OVER 2000 | ±2 |

LIMITS
Gen Tol.: IS 2102

| REVISION | DESCRIPTION | DATE | DRN.BY |
|---|---|---|---|
| | | | |
| | | | |

wipro PARI
www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI PRIVATE LIMITED
[Formerly Known as Precision Automation and Robotics India Limited]

DESCRIPTION: RG SUPPORT
DRAWING TYPE: MACHINING

| SURFACE AREA | FINISH | MACHINING | MATERIAL | NET WEIGHT-Kg | TEAM NO. | SHEET SIZE |
|---|---|---|---|---|---|---|
| 9.89 in^2 | # | # | # | 0.23 kg | PL-02 | A2 |

SURFACE FINISH | HEAT TREATMENT: ---

| DRN.BY | CHKD.BY | APPD.BY | REFERENCE DWG. | DRG./PART CODE | REV. | SCALE |
|---|---|---|---|---|---|---|
| 01009373 | 03004785 | 03002882 | --- | P23Y5B154250 | 00 | 1 : 1 |
| 06/03/2024 | 06/03/2024 | 06/03/2024 | PART CLASS. T+S | | | SHEET 1 OF 1 |

\\srv01102\ExDM Uploading\2022-23\P23Y5\P23Y5B154250.dft