


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

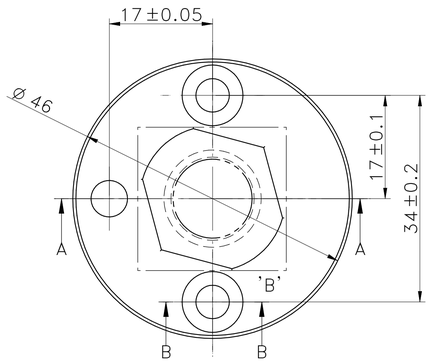


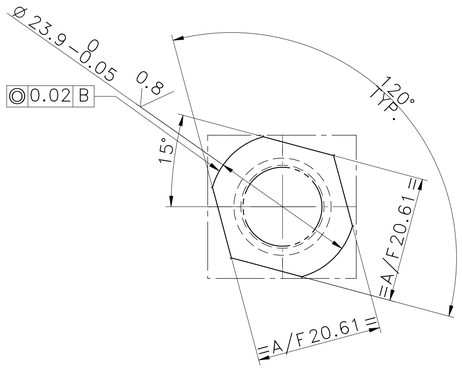



DETAIL 'B'
#



SECTION B-B



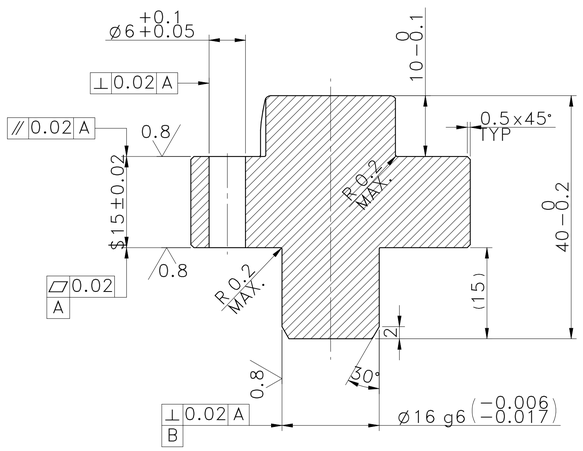



SECTION A-A
SCALE/ECHELLE 2:1

NOTE :-(English)
DEBURR ALL UNSPECIFIED HOLES AND SHARP EDGES.

NOTE :-(French)
EBAVUREZ TOUS LES TROUS NON SPÉCIFIÉS ET LES BORDS TRANCHANTS.

NOTE - # MAINTAINED DIAMOND POSITION W.R.T DOWEL HOLE AS SHOWN.

NOTE - $ MARKED DIMENSION TO BE MAINTAINED SAME FOR ALL QTY.

HEAT TREATMENT NOTE :- (English)
1) TO BE CASE HARDENED UPTO 56~60 HRC.
2) CASE DEPTH 0.8~1.2mm.
3) THREADS TO BE KEEP SOFT.
4) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.(IF APPLICABLE)

NOTE POUR LE TRAITEMENT DE LA CHALEUR :-(French)
1) A ENDURCIR JUSQUDA 56~60 HRC.
2) PROFONDEUR DU TRAITEMENT 0.8 ~ 1.2MM.
3) MAINTENIR LES FILTAGES PROPRE
4) RE-TARAUDAGE A FAIRE APRES TRAITEMENT DE SURFACE CHEZ LE FOURNISSEUR (SOIL Y A LIEU)

NOTE T + S :- (English)

HEAT TREATMANT PROCESS:REF NOTE HARDNESS & DEPTH :REF NOTE FINISH & DEPTH :REF NOTE TEST COUPON SIZE :Ø46(20mmLENGTH-01NOS) WELD CLASS : B IF APPLICABLE	MATERIAL TEST CERTIFICATE REPORT REQURIED NON DESTRUCTIVE TESTING	RAW MATERIAL ULTRASONIC TEST HEAT TREATMENT DIE PENETRATION TEST + ULTRASONIC TEST FINISH COMPOMENT MAGNETIC PARTICLE INSPECTION

NOTE T + S :- (French)

PROCÉDÉ H.T. : REF NOTE DURETÉ ET PROFONDEUR : REF NOTE FINITION ET PROFONDEUR : REF NOTE DIMENSION TEST COUPON :Ø46(20mmLENGTH-01NOS) CLASSE D'USINAGE : B IF APPLICABLE	RAPPORT DU CTM REQUIS CONTRÔLE NON DESTRUCTIF	MATIÈRE PREMIÈRE TEST ULTRASONIQUE TRAITEMENT DE LA CHALEUR TEST DE PÉNÉTRATION DE MATRICE + TEST ULTRASONIQUE COMPOSANT DE FINITION INSPECTION MAGNÉTIQUE DES PARTICULES

NOTE : (English)
MATERIAL: 20MnCr5
FINISH: I.Z.B.P. (TRIVALENT)
MACHINING: 3.2 (0.8)
WEIGHT(Kg): 0.23 kg

NOTE :-(French)
MATÉRIEL : 20MnCr5
FINITION : I.Z.B.P. (TRIVALENT)
MACHINES : 3.2 (0.8)
POIDS (Kg): 0.23 kg

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY

www.wipropari.com
1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

WIPRO PARI GROUP

DESCRIPTION: **DIAMOND PIN**
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
11.84 in^2	#	#	WPES	0300	PL-02	A1

REFERENCE DWG.	PRV73E113009	PART CLASS.T+S	HEAT TREATMENT	REF NOTE

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
6166	03006480	03002882	#	P23Y5C043007	00	2 :1
08/05/2024	08/05/2024	08/05/2024	NET WEIGHT-Kg 0.23 kg			SHEET 1 OF 1

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

RESERVED SPACE FOR CONTROLLED COPY

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : W

\\sn01043\E:\DM Uploading\2022-23\P23Y5\P23Y5C043007.dft