


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

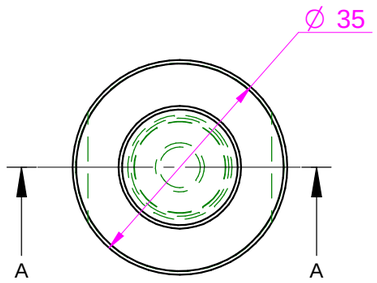



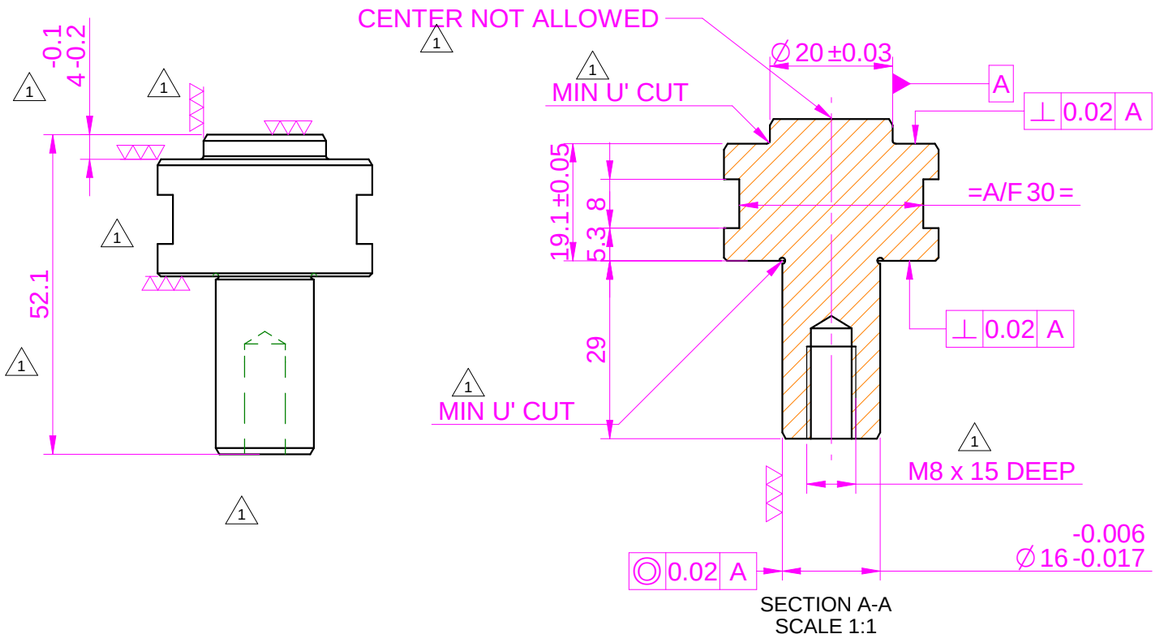

SECTION A-A
SCALE 1:1

NOTE:
1) THROUGH HARDENING 40-45 HRC
2) CENTER DRILL NOT ALLOWED ON RESTING TOP FACE.
3) QPQ FILM THICKNESS 0.2 TO 0.3 MICRONS

NOTE :
MATERIAL : C45/EN9
FINISH : QPQ
MACHINING : ▽▽(▽▽▽)

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A

RESERVED SPACE FOR
CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY
	.	.	.
1	VIEW ADDED, MISSING DIMENSIONS ADDED, MISSING U'CUT & CENTRE NOT ALLOWED ~~NOTE ADDED~~	01.08.2025	02009474

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: RESTING PIN

DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
9.52 in^2	QPQ	#	WPP	0100	PL-01	A3

REFERENCE DWG. ---- | PART CLASS. B | HEAT TREATMENT REF. DRG

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
VRD	2876	3568	#	P24CQF120030	01	1 : 1
01/08/2025	01/08/2025	01/08/2025	NET WEIGHT-Kg 0.19 kg			SHEET 1 OF 1

\\parienggnew\BT060ENGG\24-25\P24CQ_FORD_FHEV BATTERY PACK LINE\Ex-Dm Uploading\P24CQF12_RESTING PIN_001.dft