


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

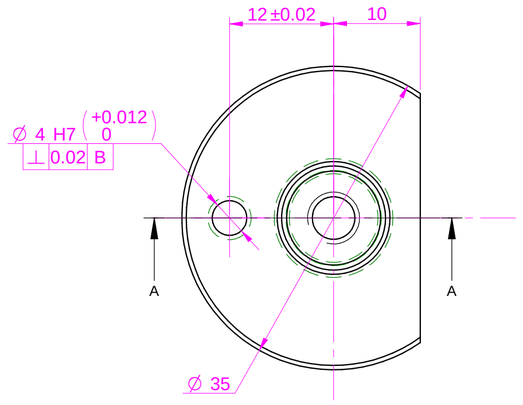

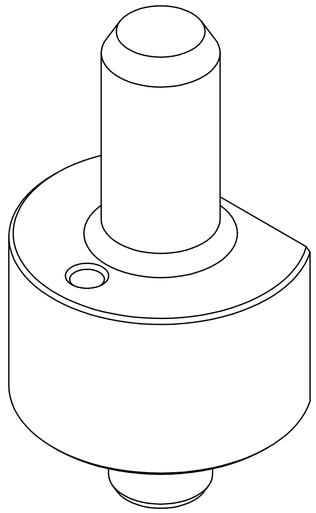

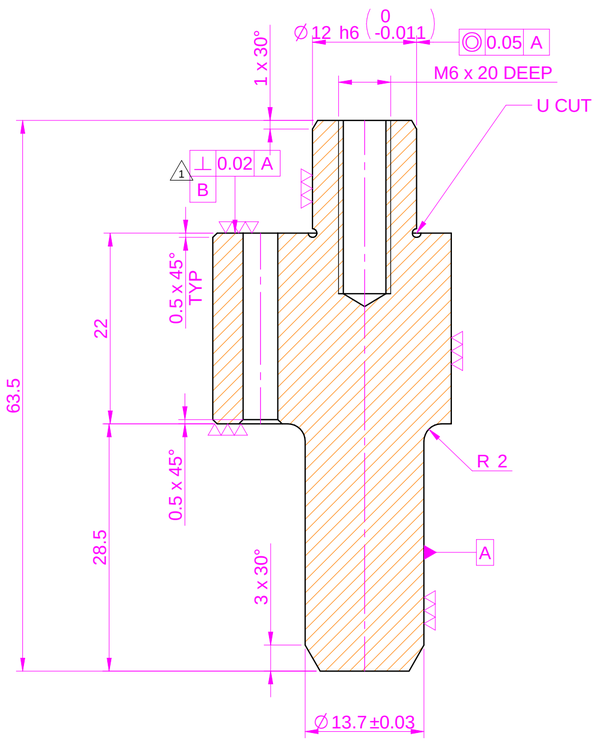

SECTION A-A
SCALE 2:1

HEAT TREATMENT NOTE:-

1) THROUGH HARDENING 40~45 HRC
2) THREADS TO BE KEEP SOFT.
3) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.(IF APPLICABLE)

NOTE :
MATERIAL : EN9 / C45
FINISH : QPQ
MACHINING : ▽▽(▽▽▽)

NOTE:-
1)QPQ FILM THICKNESS 0.2 TO 0.3 MICRONS

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N .A

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY
1	TOLERANCE POSITION CORRECTED	01.08.2025	02009474

RESERVED SPACE FOR STAMP

CONTROLLED COPY

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION						DRAWING TYPE
RESTING PIN-1						MACHINING
SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
9.45 in^2	QPQ	#	WPP	0100	PL-01	A2

REFERENCE DWG.	PART CLASS.	HEAT TREATMENT	
Error: No reference	T+S	REF. DRG	

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
VRD	2876	3568	#	P24CQF120041	01	2 : 1
01/08/2025	01/08/2025	01/08/2025	NET WEIGHT-Kg 0.18 kg			SHEET 1 OF 1

\\patterngnew\BT\06\ENGG\24-25\P24CQ_FORD_FHEV BATTERY PACK LINE\EaDrn Uploading\P24CQF12_ROUND PIN-1.drt