


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

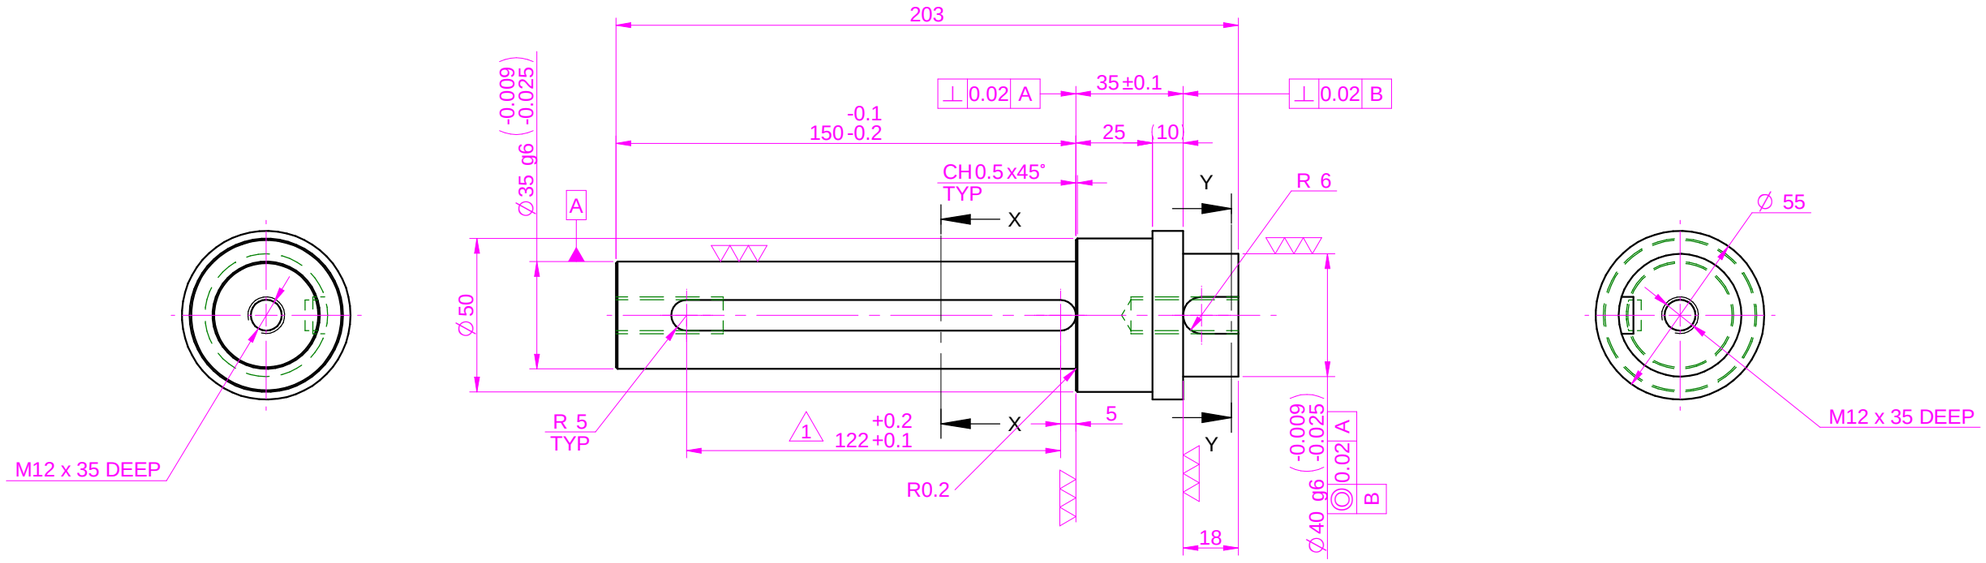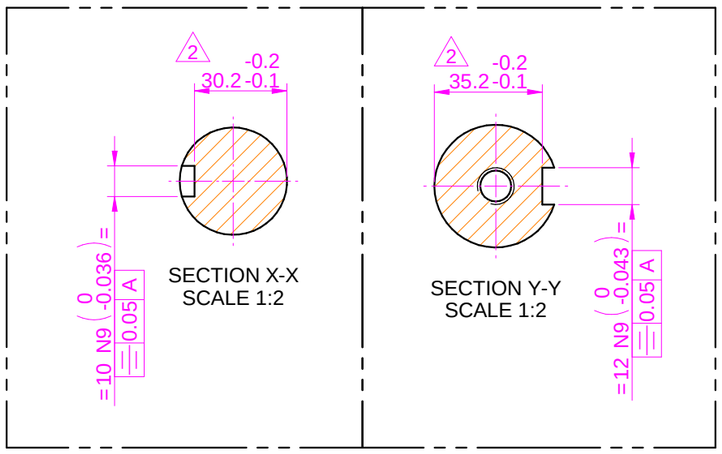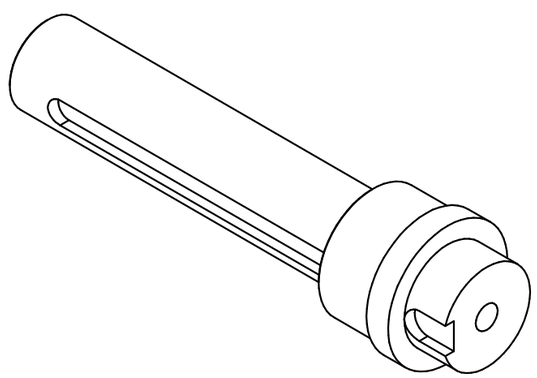

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

HEAT TREATMENT NOTE:-

1) TO BE TOUGHENED UPTO 28-32 HRC.
2) THREADS TO BE KEEP SOFT
3) REMOVE ALL SHARP EDGES & CORNERS.

KEYWAYS SHOULD BE INLINE IN 0.05 MM & TO BE DONE IN ONE SETTING

| DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED | |
|---|---|
| UNSP.RADII 0.5 R | UNSP.CHF. 0.5 X 45° |
| UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm. | |
| UP TO 10 | ±1.5° |
| 10 UP TO 50 | ±0°50' |
| 50 UP TO 120 | ±0°25' |
| 120 UP TO 400 | ±0°15' |
| UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm. | |
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.2 |
| 6 UP TO 30 | ±0.5 |
| 30 UP TO 120 | ±0.8 |
| 120 UP TO 315 | ±1.2 |
| 315 UP TO 1000 | ±2 |
| 1000 UP TO 2000 | ±3 |
| OVER 2000 | ±4 |
| UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm. | |
| UP TO 10 | ±1° |
| 10 UP TO 50 | ±0°30' |
| 50 UP TO 120 | ±0°20' |
| 120 UP TO 400 | ±0°10' |
| UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm. | |
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.1 |
| 6 UP TO 30 | ±0.2 |
| 30 UP TO 120 | ±0.3 |
| 120 UP TO 315 | ±0.5 |
| 315 UP TO 1000 | ±0.8 |
| 1000 UP TO 2000 | ±1.2 |
| OVER 2000 | ±2 |
| LIMITS | |
| Gen Tol.: IS 2102 | |

| REVISION | DESCRIPTION | DATE | DRN.BY |
|---|---|---|---|
| 2 | KEYWAY DEPTH UPDATED | 05/05/2025 | 03004288 |
| 1 | KEYWAY DEPTH UPDATED | 07/04/2025 | 03004266 |

RESERVED SPACE FOR CONTROLLED COPY STAMP

CONTROLLED COPY

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

# WIPRO PARI GROUP

DESCRIPTION: **SHAFT**

DRAWING TYPE: MACHINING

| SURFACE AREA | SURFACE TREATMENT | MACHINING | DESIGN UNIT | DESIGN UNIT CD. | TEAM NO. | SHEET SIZE |
|---|---|---|---|---|---|---|
| 50.45 in^2 | IZBP | ▽▽(▽▽▽) | WPP | 0100 | PL-02 | A3 |

REFERENCE DWG. ---  PART CLASS. B  HEAT TREATMENT REF NOTE

| DRN.BY | CHKD.BY | APPD.BY | MATERIAL | DRG./PART CODE | REV. | SCALE |
|---|---|---|---|---|---|---|
| 03004266 | 02002374 | 02002374 | EN24 | P24CVB027057 | 02 | 1 : 2 |
| 05/05/2025 | 05/05/2025 | 05/05/2025 | NET WEIGHT-Kg 1.78 kg | | | SHEET 1 OF 1 |

\\parienggnewBT10ENGG\24-25\P24CV - Vinfast General Assembly Shop\Ex\DM Uploading\P24CVB027057.dft