


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00

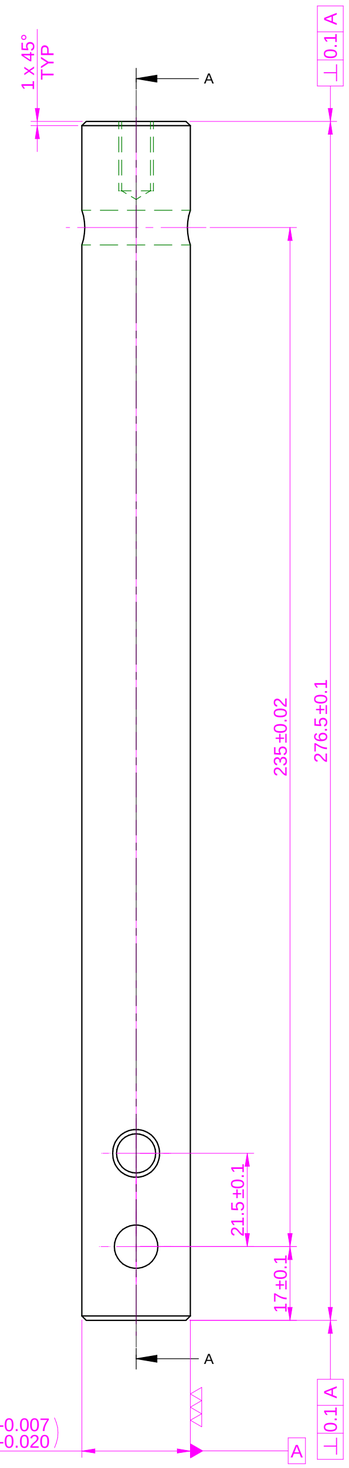

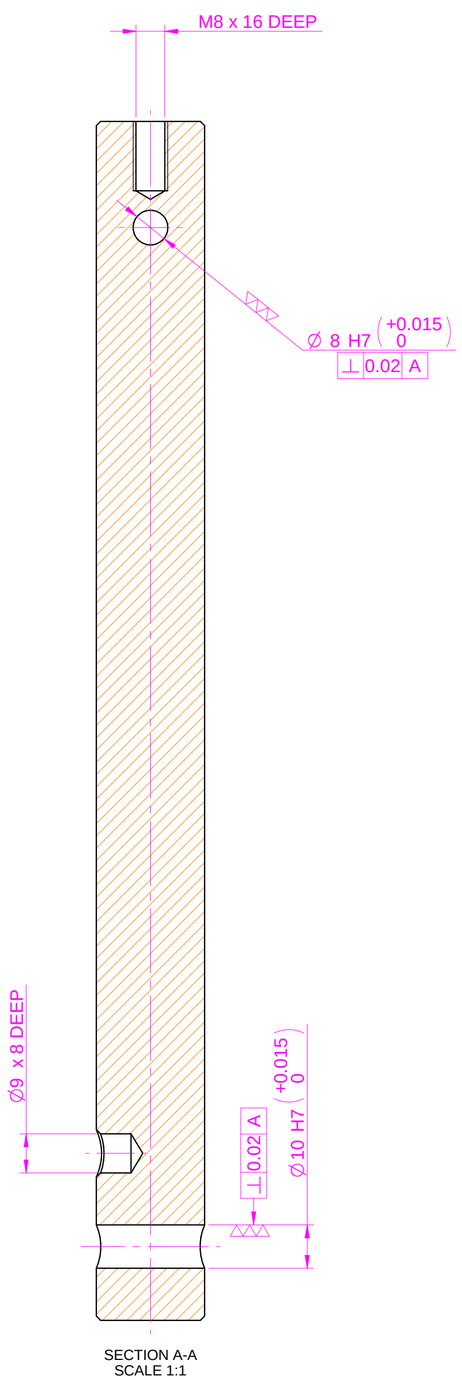

SECTION A-A
SCALE 1:1

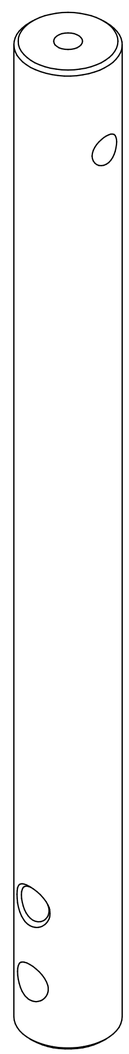

NOTE :
MATERIAL : Steel - Alloyed:1.7147 , 20MnCr5
FINISH : I.Z.B.P. (TRIVALENT)
MACHINING : ▽▽(▽▽▽)

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A

HEAT TREATMENT NOTE:-

1) TO BE CASE HARDENED UPTO 55 ~ 60 HRC.
2) CASE DEPTH 0.8~ 2 mm AFTER FINISH GRINDING.
3) THREADS TO BE KEEP SOFT
4) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.(IF APPLICABLE)

NOTE:-
1)REMOVE ALL SHARP EDGES & CORNERS.
2) STRAIGHTNESS:- 0.2mm/1000mm MAX.
3) RUNOUT:- 0.1mm/1000mm.

RESERVED SPACE FOR ... mm

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY

wipro PARI
www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION: SHAFT
DRAWING TYPE: MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
37.59 in^2	#	#	WPP	0100	PL-01	A2

REFERENCE DWG. -- | PART CLASS. B | HEAT TREATMENT --

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
PCS	NITIN G	SANDEEP J	#	P24DKB011016	00	1 : 1
04/12/2025	04/12/2025	04/12/2025	NET WEIGHT-Kg 1.02 kg			SHEET 1 OF 1

\\srv01101\Ex2M Uploading\2024-25\P24DKI\P24DKB011016.dft